

Authorised Dealer

Stockiest



BALL SCREW




BELLOW
COUPLING



LINEAR GUIDEWAYS



LINEAR GUIDEWAYS

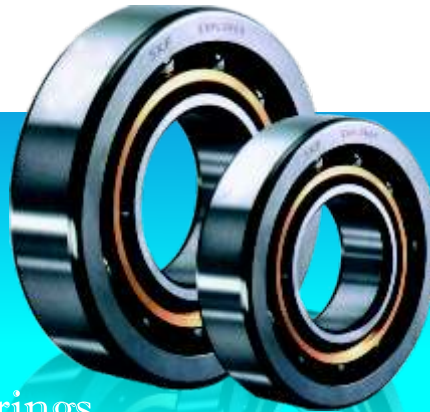

Complete solution for
CNC spare parts and Bearings



CONTINENTAL SALES CORPORATION

To provide accurate solution both in terms
of services and parts, is our ultimate goal.



Ball Screw

KORTA BALL SCREW

Precision Ground Ball screw with following Specifications

- ✓ Diameter : 6mm – 120mm
- ✓ Pitch : 4mm – 64mm
- ✓ Single Nut And Double Nut
- ✓ Length 1000mm – 10000mm
- ✓ Accuracy Class : C0, C1, C3, C5 ,C7
- ✓ Load type: Normal And Heavy
- ✓ Customised Ball screw as per your Drawing



WE REPAIR ALL TYPES OF BALL SCREW

Standard Dimension Ball Screws :

Diameter	Lead													
	4	5	6	8	10	12	16	20	25	32	40	50	64	
12														
16														
20														
25														
32														
40														
50														
63														
80														
100														
120														
160														

Rexroth Bosch Group

Rexroth Precision Ball Screw Assembly with C5 and C7 Accuracy Class

Double Nut

Single Nut



FDMES
Full - Flange

FEM-E-C

THK The Mark of Linear Motion



BTK Series

HIWIN Lineartechnologie



FSI and FDI series

Rexroth
Bosch Group

THK
The Mark of Linear Motion

SCHNEEBERGER
LINEAR TECHNOLOGY

HIWIN
Linear Motion Products & Technology



Flanged, Normal,
Standard Height



Flanged, Long,
Standard Height



Flanged, Short,
Standard Height



Slimline, Normal,
Standard Height



Slimline, Long,
Standard Height



Slimline Flanged, Short,
Standard Height

THK
The Mark of Linear Motion

HIWIN
Lineartechnologie

THK Model Chart

MODEL	SIZE
HSR – A/LA	15mm – 65 mm
HSR – B/LB	15mm – 65 mm
HSR – R/LR	15mm – 65 mm
SHR – SNR – V/LC	15mm – 65 mm
SHR – SNR – V/LV	15mm – 65 mm
SHS – SNR – R/LR	15mm – 65 mm

Hiwin Model Chart

MODEL	SIZE
HGL – CA / HGH – HA	15mm – 65 mm
HGL – CA / HGL – HA	15mm – 65 mm
EGW – CA / HGW – HA	15mm – 65 mm
EGH – SA / EGH – CA	15mm – 65 mm
EGW – SA / EGW – AC	15mm – 65 mm
EGW – SB / EGW – CB	15mm – 65 mm

BELLOW COUPLING



Coupling with
set screw
Torque range: 0.1 - 10Nm



Coupling with
collet clamp
Torque range: 0.1 - 10Nm



Coupling with
expanding clamp
Torque range: 0.5 - 10Nm




Coupling with
collet clamp
Torque range: 18 - 1400Nm



Coupling with
inner conical hubs
Torque range: 18 - 5000Nm



Coupling with
outer conical hub
Torque range: 18 - 5000Nm



Coupling with
flange mounting
Torque range: 18 - 5000Nm



Disc Coupling



Elastomer
Flexible Coupling
Torque range: 10 - 320Nm

RHP bearings

MOTION & CONTROL
NSK

FAG

Gamet
Bearings
600 Group



NTN

TIMKEN
Where You Turn

SKF



Flanged, Normal,
Standard Height



Flanged, Long,
Standard Height



Precision Bearings



Slimline, Normal,
Standard Height



Slimline, Long,
Standard Height



Slimline Flanged, Short,
Standard Height

Kübler

Encoder



Linear Bushing System



Open Type



Standard Type



Round Flanged Type



H- Flanged Type

Cross Roller Guide Ways



Precision Lock Nut



Double type



Single Type



Normal Chuck Nuts

Cam Flowers





TURCITE SHEET

- ✓ Thickness: 0.6, 0.8, 1.0, 1.6, 2.0, 2.5, 3.0, 3.5
- ✓ Reduces friction and wear
- ✓ Increases accuracy
- ✓ Extends machine life
- ✓ Saves energy
- ✓ Reduces damage caused by mechanical problems



LITHIUM BATTERY



DISC SPRINGS



//
KLUBER
LUBRICATION

OKS





Continental Sales Corporation

80, Shradhanand Marg, G.B.Road,
Delhi - 110006, India.

Telephone: +91 011 23941315 / 23960345
Mobile: +91 9810150291 / 8860971251
E-mail: cnc.sunil@gmail.com
website: www.continentalsales.co.in