



ARC/HRC/ERC Standard 4-Row Ball Bearing Linear Guide

WRC Wide 4-Row Ball Bearing Linear Guide

ARD/HRD/ERD Standard 4-Row Ball Bearing Linear Guide  
Equipped with Cover Strip

ARR/HRR/LRR Standard 4-Row Roller-type Linear Guide

\* **cpc** reserves the right to revise any information(technical details) any time without notice,  
for printing mistakes or any other incidental mistakes. We take no responsibility.

## Contents

### ARC/HRC/ERC Standard 4-Row Ball Bearing Linear Guide

ARC/HRC/ERC Product Overview.....	P01~P02
Product Design (Standard Equipment).....	P03~P06
Product Design (Optional Accessories).....	P07~P12
Technical Information.....	P13~P25
Installation Instructions.....	P26~P29
Lubrication.....	P30
Accuracy.....	P31
Ordering Information.....	P32
Dimensions Specification.....	P33~P40

### WRC Wide 4-Row Ball Bearing Linear Guide

Ordering Information.....	P42
Dimensions Specification.....	P43~P44

### ARD Standard 4-Row Ball Bearing Linear Guide Equipped with Cover Strip

Product Features.....	P45
Installation Instructions.....	P46
Ordering Information.....	P46
Dimensions Specification.....	P47~P54

### ARR/HRR/LRR 4-Row Roller-type Linear Guide

Product Design.....	P55~P60
Technical Information.....	P61~P62
Accuracy.....	P63~P64
Ordering Information.....	P65~P66
Dimensions Specification.....	P67~P76

### Belows

Belows.....	P77~P78
-------------	---------


### Grease Nipple Option

Grease Nipple Option.....	P79~P80
Lubrication Kit and Grease Gun.....	P81~P82

### Lubrication Storages Pad Testing Report

Lubrication Storages Pad Test Report.....	P83
Linear Guide Service Life Calculation and Model Selection.....	P84

## Selection method

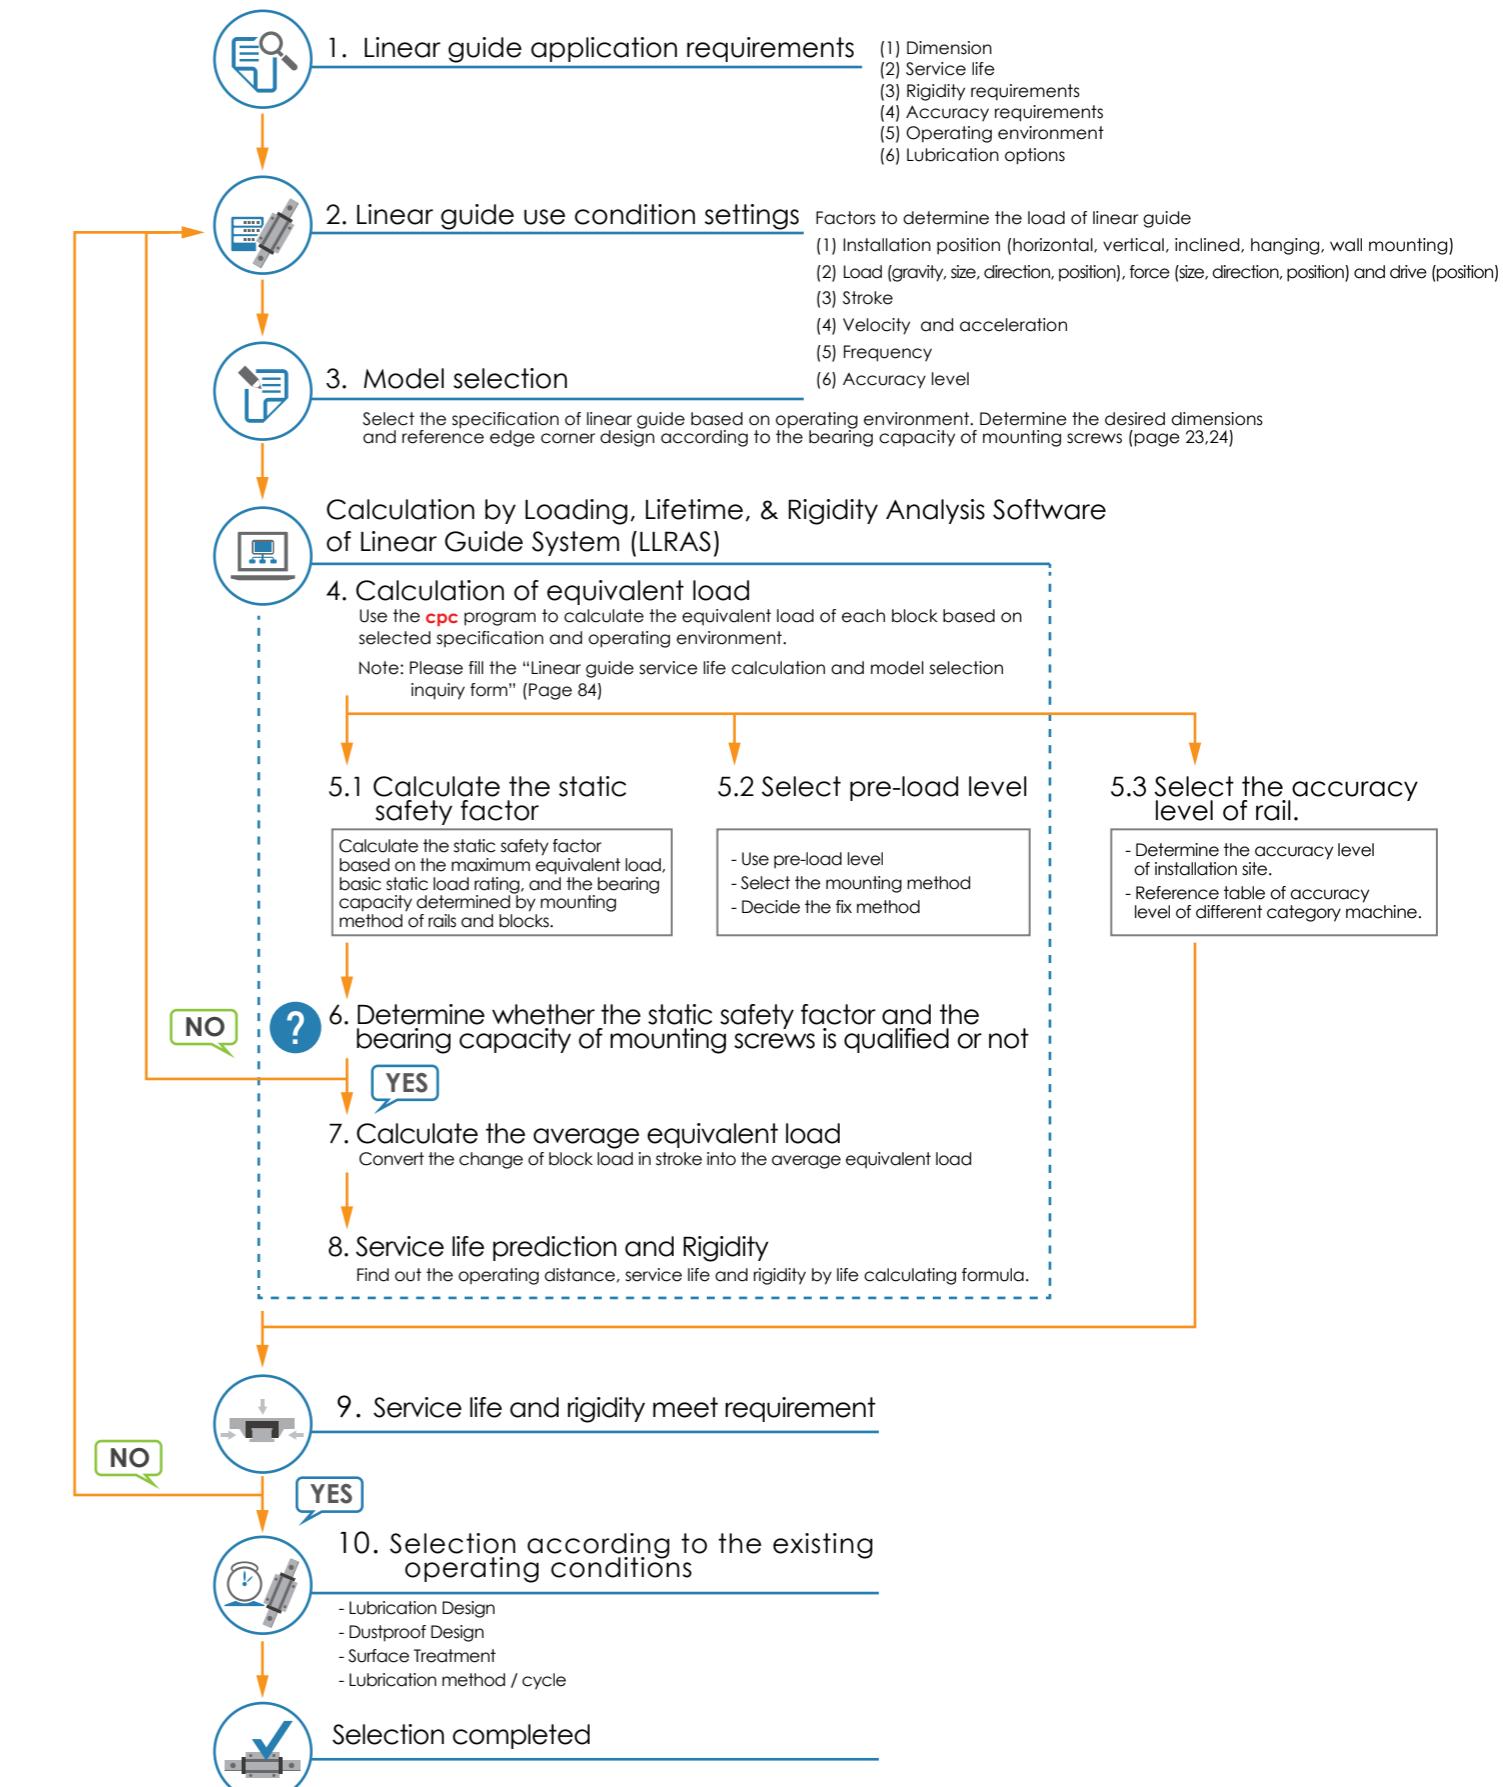


## Product Overview

### ARC/HRC/ERC Product Characteristics

Our standard **cpc** ARC/HRC/ERC Linear Guide Series uses the O-type arrangement for its four-row ball circulation design. The 45-degree contact angle between the rails and balls allows our product to realize a four-directional equivalent load effect. **cpc** has placed special emphasis on strengthening the arm length ( $l_o$ ) of our product so that when sustaining external force ( $F$ ), this can have an even higher  $M_r$  value, which increases its rigidity and torsion-resistant capabilities. The larger and more numerous balls in our products allows it to have a 10-30% greater load capacity than similarly sized competitor products. These and other characteristics are the source of our product's high load capacity, moment, and stiffness features.

Mode Code	$l_o$	$H_c$
15	12.4	9.35
20	16.4	12.5
25	19.5	14.5
30	24.0	17
35	30.4	19.5
45	38.2	24
55	43.1	28.5

$F = M_r/l_o (L_x)$

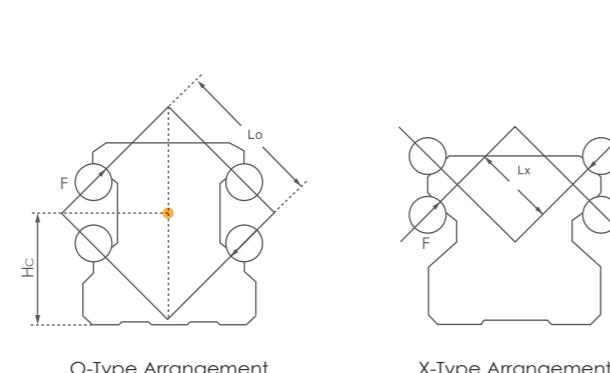

#### Stainless steel reinforcement plate

- Total scraping of external objects above 0.3mm
- Increased X-axis axial force capacity



#### Inner Lubrication storage Pad (Upper)

- No need to increase the length of the runner block
- Full lubrication contact with balls, particularly suitable for short stroke movement.

#### End Cap

- All-around lubrication holes system



#### High abrasion resistant material end seal

- Standard contactless, low friction, high dust proof seal



#### Ball chain

- Patented design to enable reverse operations.
- Muted and prolonged service life

#### Inner Lubrication storage Pad (Bottom)

- High Load and torque capabilities
- Excellent dynamic performance: Reach  $V_{max}$  10 m/s      Reach  $\alpha_{max}$  450 m/s<sup>2</sup>
- Can provide counterbored holes from the top and tapped mounting holes from the bottom rail
- Can provide specialized steel surface treatment

## Product Design (Standard)


### Dustproof design

#### Inner Seals

The newly designed inner seals both protect the rails from foreign particles and keep the lubrication inside the runner block while maintaining a low friction profile.

#### Bottom Seals

The bottom seals work in conjunction with the inner seals to keep foreign particles out and lubrication from leaking out. Our comprehensive sealing design significantly reduces re-lubrication needs and prolongs the service life of the runner block.

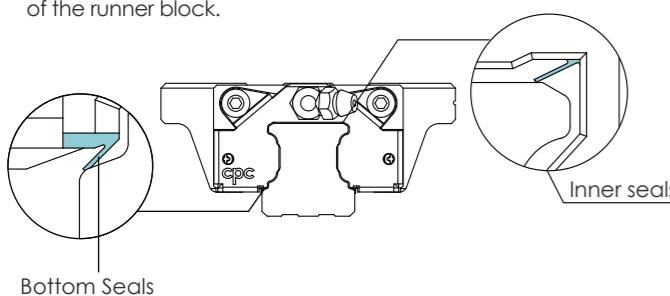

#### End Seals

The end seals work in conjunction with the bottom and inner seals to block foreign particles out and prevent lubrication leakage. Our engineering plastic has a strong friction resistance and is less prone to cracking than typical NBR plastics.

#### Standard Seals (S)




Our standard seals are in direct contact with the rail surface, giving them increased dustproof and lubrication retention capabilities. **cpc** recommends this class of seal for blocks that operate in environments high in foreign particles, such as sawdust, for long periods of time. S-type seals will have comparatively higher friction than B-type seals.

#### Low Friction Seals (B)

Our low-friction seals have slight contact with the rail and are suitable for most environments, with both low friction and a scraper function.


#### Stainless Steel Reinforcement Plate

The reinforcement plate also functions as a scraper for larger particulates like iron fillings, and has no more than 0.3mm clearance between the plate and the rail.

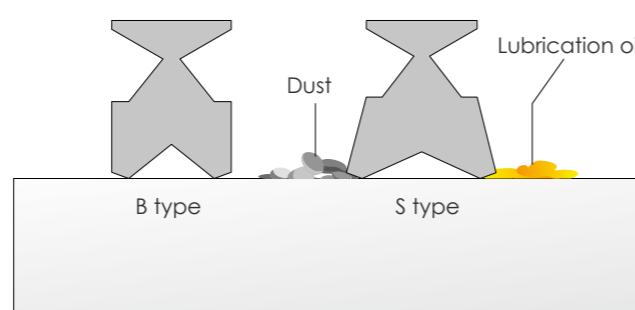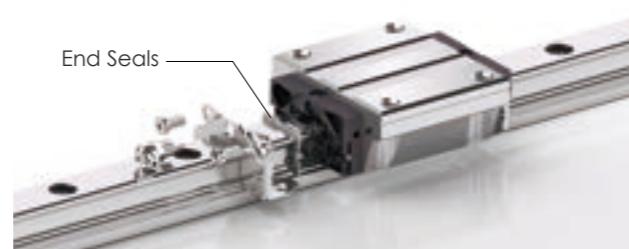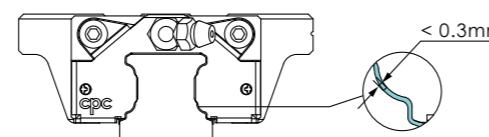

#### Seal type friction comparison

Friction levels will be the highest on new linear rails. But, after short periods of operation, such friction will be reduced to a constant level.

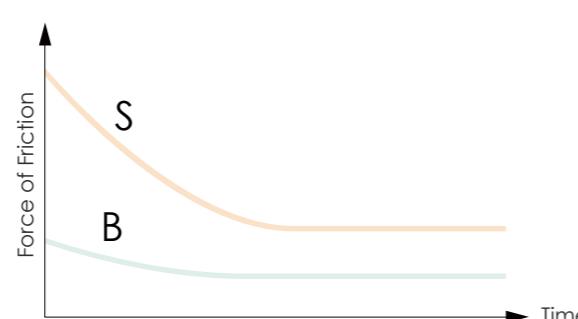

### Average Friction of Block

The following table shows the resistance value of the running block mounted with different seal types under the condition when the running block lubricated with ISO VG32 lubricant.

Unit : N

Block Type	Friction caused from ball bearing				Bottom Seals + Inner Seals	End Seals ( 2 sides )		External NBR seal with metal scraper	
	Preload Class					S-Type Standard	B-Type Low friction		
	VC	V0	V1	V2					
15MN/FN	0.30	0.65	0.85	1.10	1.5	2.0	0.5	4	
20MN/FN	0.40	0.75	1.40	1.60	2.0	2.5	1.0	5	
25MN/FN	0.60	0.95	1.60	1.95	2.5	3.0	1.5	8	
30MN/FN	0.55	1.10	2.00	3.10	3.0	5.0	2.0	10	
35MN/FN	0.65	1.25	2.50	3.25	3.0	8.0	3.0	12	
45MN/FN	0.85	2.10	2.80	4.00	4.0	11.0	4.0	20	
55MN/FN	1.6	4.1	5.5	7.95	2.0	13.0	-	-	

Unit : N

Block Type	Friction caused from ball bearing				Bottom Seals + Inner Seals	End Seals ( 2 sides )		External NBR seal with metal scraper	
	Preload Class					S-Type Standard	B-Type Low friction		
	VC	V0	V1	V2					
15MS/FS	0.30	0.60	0.80	1.00	1.5	2.0	0.5	4	
20MS/FS	0.40	0.70	1.10	1.40	2.0	2.5	1.0	5	
25MS/FS	0.50	0.90	1.20	1.80	2.5	3.0	1.5	8	
30MS/FS	0.50	1.00	1.80	2.30	3.0	5.0	2.0	10	

Unit : N

Block Type	Friction caused from ball bearing				Bottom Seals + Inner Seals	End Seals ( 2 sides )		External NBR seal with metal scraper	
	Preload Class					S-Type Standard	B-Type Low friction		
	VC	V0	V1	V2					
15ML/FL	0.40	0.70	0.90	1.40	1.5	2.0	0.5	4	
20ML/FL	0.50	0.80	1.60	1.80	2.0	2.5	1.0	5	
25ML/FL	0.70	1.20	1.80	2.00	2.5	3.0	1.5	8	
30ML/FL	0.80	1.40	2.20	2.80	3.0	5.0	2.0	10	
35ML/FL	0.90	1.60	2.70	3.50	3.0	8.0	3.0	12	
45ML/FL	1.00	2.30	3.50	4.55	4.0	11.0	4.0	20	
55ML/FL	1.9	4.3	6.6	8.6	2.0	13.0	-	-	

Unit : N

Note: The end seal is made of elastic plastic material, not NBR, with low friction resistance and constant dynamic and static friction.

#### Applied example

①. ARC25MN SZ V1N

Block friction =  $1.6+2.5+3 = 7.1\text{N}$

②. HRC30FL BZ V0P

Block friction =  $1.4+3+2 = 6.4\text{N}$

Friction caused from ball bearing

Bottom Seals + Inner Seals

+) End Seals (2 sides)

Block friction

## Product Design (Standard)

### Saw wood dust Test

#### Test content

This test uses a total of 4 groups of products (2 rails matched with 2 lubrication methods) which are put on a saw wood dust surface on which a back and forth motion test is performed.

#### Rail

1. Standard rail plus hole plugs (AR)
2. Rail tapped from the bottom (ARU)

#### Runner Block

1. Installation of standard contact type seals (S), using grease.
2. Installation of lubrication storage Pad and standard contact type seals (SZ), using grease.

#### Testing conditions

1. Stroke = 600mm
2. Total testing stroke = 30m

#### Test results



Tapped from bottom (oil)



Tapped from bottom (grease)

#### Test result


- The standard rail has hole plugs, leading to rail unevenness, allowing some saw wood dust to enter the runner block belly area. The 2 sides of the runner block belly area are completely protected by stainless steel reinforcement plates and end seals, meaning that the ball bearing runner area is fully shielded from saw wood dust.
- The rail tapped from the bottom has an even rail surface so that the ball bearing runner area is fully protected from saw wood dust.

## Stainless steel reinforcement plate (Patent)

### Scraping function on both sides

Using 2 stainless steel reinforcement plates, the L form design allows for screws to be fastened onto the top and bottom of the runner block, reinforcing the rigidity and cladding of its caps.


The clearance between the rail profile with the seal design is below 0.3mm, reinforcing the steel plates while enabling scraper functions.

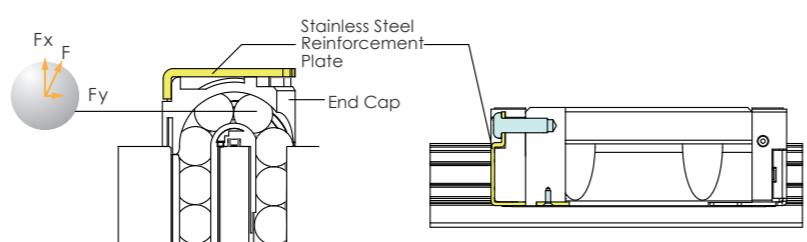

### Function of high speed operation

Our ARC/HRC/ERC, ARD/HRD/ERD type features stainless steel reinforcement plates and additional bottom latches, increasing its axial force and tolerance capacity to achieve a faster operating speed.

$V_{max} > 10 \text{ m/s}$     $\alpha_{max} > 450 \text{ m/s}^2$

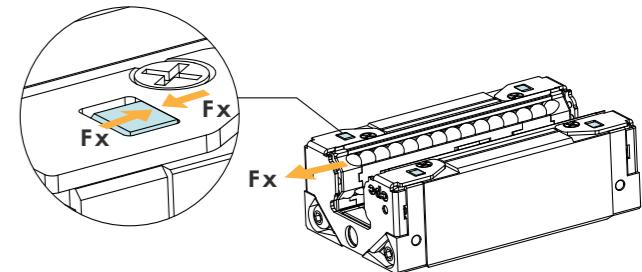

### Multi-Directional Lubrication Nozzles (All-direction Lubrication Nozzles)

Our product features lubrication ports from the top, front, and side of the block, allowing the installation of optional grease nipples for relubrication. The top port comes with an O-ring seal to allow easy relubrication from the top, and our diverse comprehensive lubrication injection design allows for lubrication from all directions.



### Instruction for side lubricant-nozzle-installation port of Linear Guide


The side lubrication injection port (see pic.1) on cpc's linear guide blocks is sealed on delivery to prevent leakage of lubricants.

Before installing lubricant injection nozzle or piping, the seal must be broken to allow lubricant to enter the runner block.

#### Installation Steps


##### 1. Tool

To pierce the seal, select an awl with a diameter less than  $\phi 1 \text{ mm}$  (see pic.2).

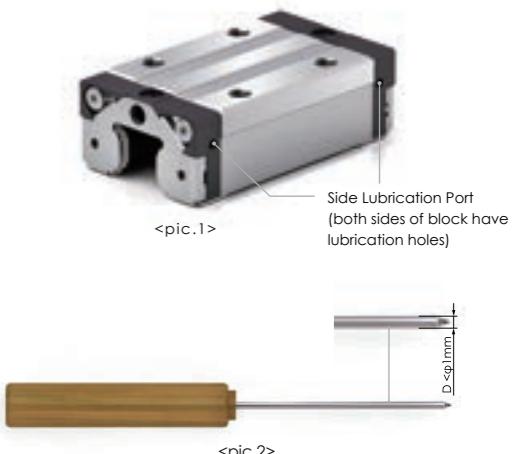


##### 2. Side lubrication port

The seal is in a deeper small hole in the middle of the side lubrication injection hole on the block (see Detail View A from pic.3). The seal is only 0.2–0.3mm thick.

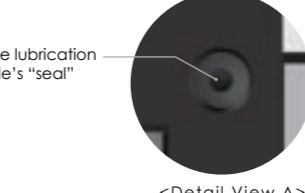

##### 3. Piercing method

Use the awl to stab into the seal showed in above picture. Press the awl against the seal (see pic.4A) and move gently forward by about 1mm. Please do not use power tools or pierce too deep, to prevent damage to guide block end cap, which may impact its functionality and interfere with lubricant passage.

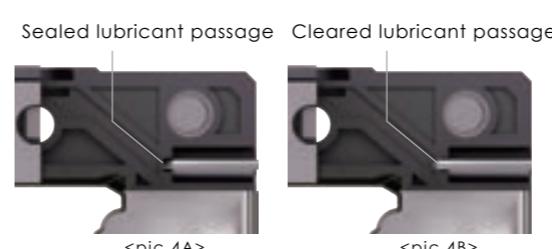

## Product Design (Option)

### Low noise, superior quality high speed ball chain (Patent)

Ordering code: C

With traditional ball type linear guides, the spinning of balls in different directions leads to a two-times faster contact speed. Such high friction greatly reduces the service life of such products. Additionally, the contact point between such balls also produces high pressure and noise levels while increasing the danger of oil film cladding damage.




\* The **cpc** ball chain provides a greater contact area between the balls and the ball chain. Because the film cladding will not be damaged easily and due to the lower noise volume, balls can move at a higher speed while product service life can also be extended significantly.

\* The block with the ball chain design has the same dimensions as that without ball chains, allowing for the use of the same rails.


### Heavy load test

Condition  
 Model : ARC25MN SZC V1H      Dynamic load rating  $C_{100}$  : 33.6kN  
 Velocity : 1m/sec      Stroke : 960mm  
 Load capacities : 7.44kN(0.3C)      Preload : 0.05C  
 Rating Life  $(\frac{C}{P})^3 \times 100\text{km} = (\frac{C}{0.05C+0.3C})^3 \times 100\text{km} = 2332\text{km}$

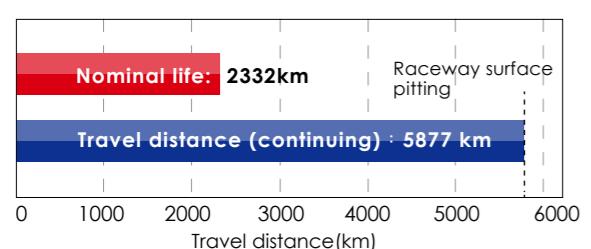


### Smoothness test

Model code : ARC25MNSV1N  
 Velocity : 10 mm/sec

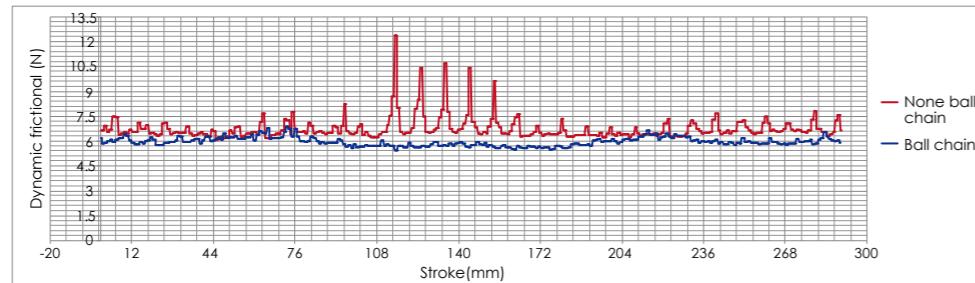

### Low noise ball chain

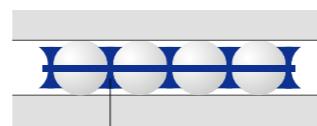

The contact point between the balls and ball chain leads to a low surface pressure level.

### Traditional Ball type linear guide




Because the contact point of ball type linear guides is only between balls, the surface pressure is significantly higher.

### Load capacity of ball chain

There are three advantages of ARC/HRC/ERC/, ARD/HRD/ERD ball chain series as compared with traditional, non-ball chain blocks:

1. The space block in the ball chain can prevent the oil film from rupturing by ball to ball contact and decrease friction induced wear.
2. The retainer block of the ball chain can maintain a reliable oil film layer by continuously applying grease on the moving part.
3. The ball chain provides the important function of leading steel ball motion. For traditional blocks without ball chains, its steel balls are pushed by the rotating back steel balls on the raceway, meaning that the contact angle between the balls and rail is less precise, causing vibration and an increased stress level between balls. In comparison, the balls in our ball chain product are led by the ball chain to ensure a correct fit and accurate contact angles. In this way, our product's ball chain design ensures that it can fit correctly when entering the raceway and that the contact angle will be accurate. This means that our Ball chain design provides for a smooth performance, lower vibration levels and less additional stress levels. Subsequently increase the dynamic load rating,  $C_{cage}$  value.

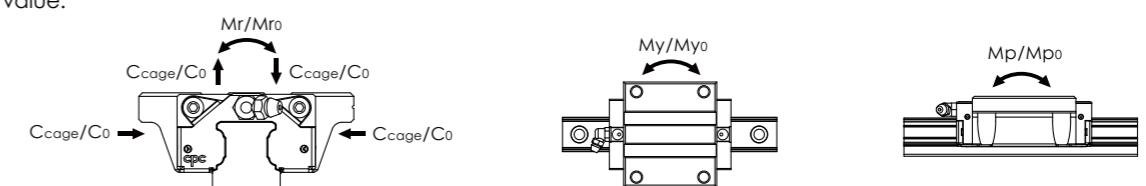

Model Code	$C_{ISO}$ (kN)	$C_{cage}$ (kN)	
ARC/ARD-MN C	15	9.4	11.8
ARC/ARD-FN C	20	15.4	22.3
HRC/HRD-MN C	25	22.4	33.6
HRC/HRD-FN C	30	31.0	46.5
ERC/ERD-MN C	35	43.7	65.6
	45	67.6	101.4
ARC/ARD-ML C	15	12.5	15.6
HRC/HRD-ML C	20	18.9	27.4
HRC/HRD-FL C	25	28.5	42.8
ERC/ERD-ML C	30	38.0	57.0
	35	52.5	75.9
	45	86.2	129.3
ARC/ARD-MS C	15	7.1	8.9
ARC/ARD-FS C	20	11.6	16.8
ERC/ERD-MS C	25	16.8	25.2
	30	21.3	32.0
	35	30.9	44.8

### Dynamic rating load

The table on the right shows the  $C_{cage}$  and  $C_{ISO}$  values via different machine type testing. (According to ISO-14728 regulations)

Model Code	$C_0$	Static rating load(kN)			Static torque(Nm)		
		$M_{ro}$	$M_{p0}$	$M_{y0}$	$M_{ro}$	$M_{p0}$	$M_{y0}$
ARC/ARD-MN C	15	17.8	165	125	125	2150	2150
ARC/ARD-FN C	20	28.1	340	275	275	465	465
HRC/HRD-MN C	25	39.9	575	465	465	730	730
HRC/HRD-FN C	30	54.3	965	730	730	1240	1240
ERC/ERD-MN C	35	76.9	1900	1240	1240	2150	2150
	45	112.7	3250	2150	2150	3250	3250
ARC/ARD-ML C	15	26.6	255	300	300	485	485
HRC/HRD-ML C	20	37.6	465	485	485	850	850
HRC/HRD-FL C	25	56.6	780	1250	1250	1315	1315
ERC/ERD-ML C	30	72.5	1315	1250	1250	1250	1250
	35	100.6	2500	1600	1600	4050	4050
	45	159.7	4750	4050	4050	4750	4750
ARC/ARD-MS C	15	11.8	105	60	60	220	220
ARC/ARD-FS C	20	18.8	220	120	120	415	415
ERC/ERD-MS C	25	26.6	415	220	220	615	615
	30	36.2	615	310	310	975	975
	35	47.3	1100	475	475	1100	1100

### Static rating load & Static torque

The C type block of ARC/HRC/ERC, ARD/HRD/ERD will increase the pitch between balls on the operating profile. Therefore, the static rating load  $C_0$  and the static rating torque  $M_{ro}$ ,  $M_{p0}$  and  $M_{y0}$  values will be decreased.


## Product Design (option)

### Lubrication Design

(Ordering Code: Z) (ARC/HRC/ERC, ARD/HRD/ERD)

#### Inner oil storage and oil supply system design

Our Inner PU Lubrication Storage Pad design does not increase the length of the runner block and can effectively lubricate all balls. Customers can inject lubrication oil directly through its lubrication holes to ensure sufficient storage in the PU Lubrication storage pad. This not only enables long-term lubrication effects but also a higher degree of ease at conforming to environment protection needs and lowering maintenance costs. For short-stroke movements, this product allows for highly effective lubrication.

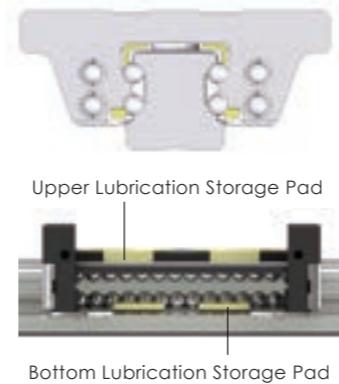

Extending the relubrication interval and reducing the amount of lubricant has always been the main issues for the manufacturers of linear guides. The rolling elements and the raceway surface must be completely lubricated. This is the condition that the linear guide must have to operate. However, the application environment of linear guides is quite different. A critical environment due to acid, iron filings, wood chips, coolant, working speed, stroke length, load, installation, etc. will affect lubrication. The **cpc** lubrication storage can keep oil/grease for a long time. **cpc** block with the lubrication unit can be used in the same way as the block without an oil tank. The grease nipple can be mounted on the block and the lubricant can be supplied directly and achieves the effect of permanent lubrication!


### External NBR Seal with Metal Scraper (Ordering Code: SN / HN)

(ARC/HRC/ERC, WRC, ARD/HRD/ERD, ARR/HRR/LRR)

Available for applications in harsh environments such as in grinding, glass processing, graphite processing and wood-working machinery, providing a highly effective dust and iron scrap proofing solution.


SN: (made by BRB) For application in harsh environment.

HN: (made by HNBR) For application of resisting acidic / basic coolant.

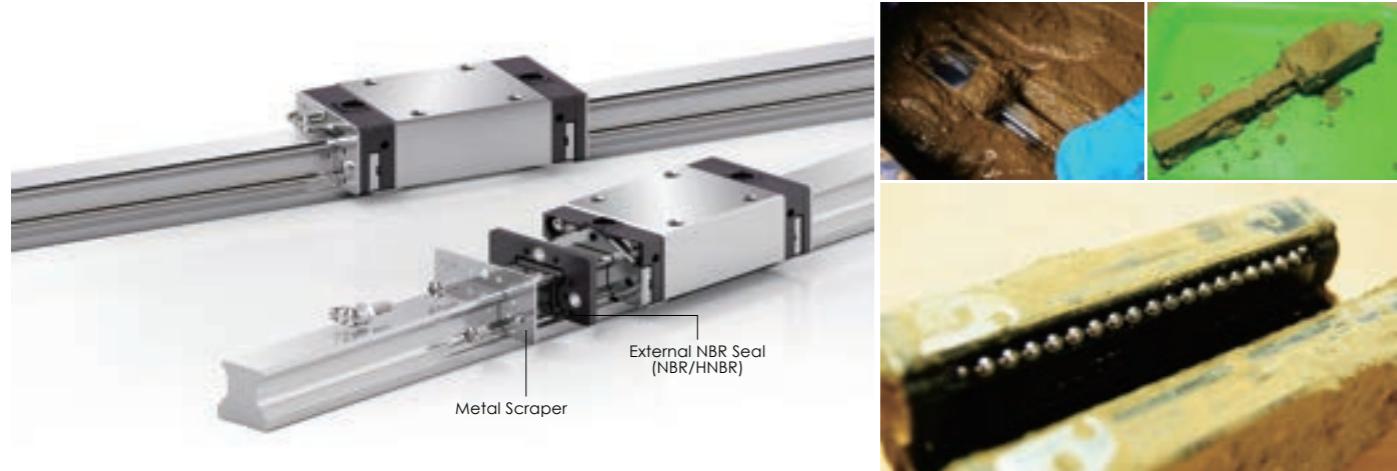


### Installation Manual

1. When installing the external NBR seal, please ensure that the block is on the rail.
2. Ensure that the rubber part is fitted in the sleeve. If the rubber part has fallen off, set the sleeve to the corresponding bore.
3. Overlap the rubber part and metal scrapper with the corresponding salient point and bore. The **cpc** logo must be facing outward.
4. Slide the external NBR seal into the rail from two sides and closely connect with the block.
5. Fasten the screw into the correspondence bore and align the seal with the center of the rail and properly fastened. Do not allow the metal scraper to make contact with the guide rail.

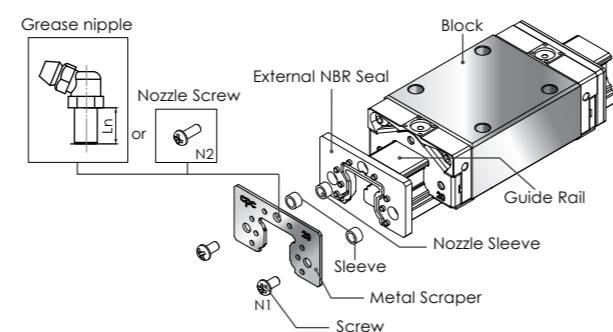

### ARC/HRC/ERC ball type external NBR seal dimensions and specifications

#### Dimensions of the block mounted with external NBR seals

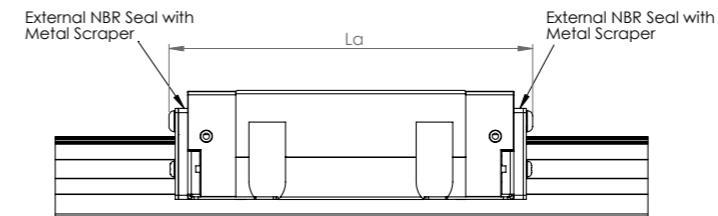


Model Code	Exterior Dimension La		
	MS/FS	MN/FN	ML/FL
ARC/HRC/ERC			
15	54.2	68.5	98.2
20	62.2	82	100.2
25	75.8	99.6	123.4
30	88	115.5	138
35	-	131.2	156.6
45	-	157.5	193.5
55	-	188.5	222
WRC			
27/20	-	83	-

#### The size and position of the screw hole on the stainless steel reinforcement plate



Functions of the screw hole on the stainless steel reinforcement plate:

1. using for external NBR seal
2. using for the bellow
3. using for MSS reader

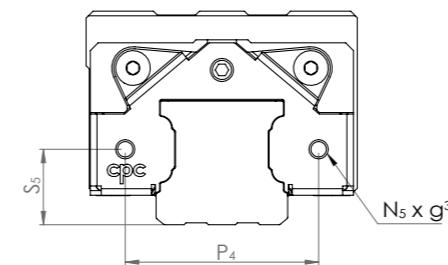

Model Code	Exterior Dimension			
	P <sub>4</sub>	S <sub>5</sub>	N <sub>5</sub>	g <sup>3</sup>
ARC/HRC/ERC				
15	25	9.4	M3x0.35	2.3
20	29	12.5	M3x0.35	2.1
25	36.5	14.5	M3x0.35	2.8
30	42.5	17	M4x0.5	3.2
35	50	19.5	M4x0.5	3.1
45	65	24	M4x0.5	5.8
55	73	28.5	M5x0.5	5.6
WRC				
27/20	50	11	M3x0.35	2.5


#### Dimensions of external NBR seals

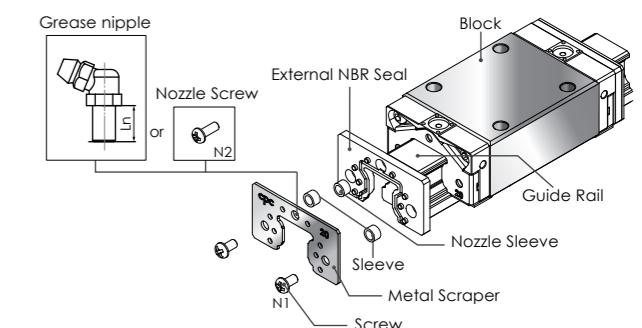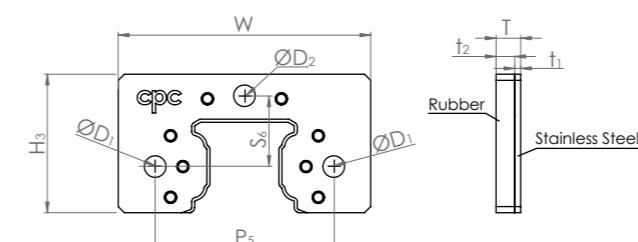

Model Code	Exterior Dimension						Bore Specification			Screw Specification			Nipple
	T	t <sub>1</sub>	t <sub>2</sub>	W	H <sub>3</sub>	P <sub>5</sub>	S <sub>6</sub>	ØD <sub>1</sub>	ØD <sub>2</sub>	N <sub>1</sub>	N <sub>2</sub>	L <sub>n</sub>	
ARC/HRC/ERC													
15	4	1	3	33	20.3	25	10.2	3.5	3.5	M3x0.35	M3x0.5	9	A/B-M3-L
20	4	1	3	41	22.5	29	11.5	3.5	3.5	M3x0.35	M3x0.5	9	A/B-M3-L
25	5.2	1.2	4	47	26.5	36.5	13.5	3.5	6.5	M3x0.35	M6x0.75	12	A/B-M6-L
30	6	1.5	4.5	58	34.2	42.5	17.5	4.5	6.5	M4x0.5	M6x0.75	12	A/B-M6-L
35	6	1.5	4.5	68	39.3	50	20.5	4.5	6.5	M4x0.5	M6x0.75	12	A/B-M6-L
45	6	1.5	4.5	84	49.6	65	24.9	4.5	10	M4x0.5	PT1/8	15	B-PT1/8-L
55	6	1.5	4.5	98	57	73	28	5.5	6.5	M5x0.5	M6x0.75	12	A/B-M6-L
WRC													
27/20	4	1	3	61	23.2	50	11.5	3.5	3.5	M3x0.35	M3x0.5	9	A/B-M3-L

## ARR/HRR/LEE roller type external NBR seal dimensions and specifications


### Dimensions of the block mounted with external NBR seals

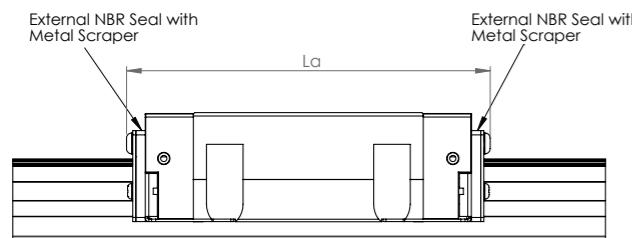



### The size and position of the screw hole on the stainless steel reinforcement plate

#### Functions of the screw hole on the stainless steel reinforcement plate:

1. using for external NBR seal
2. using for the bellow
3. using for MSS reader

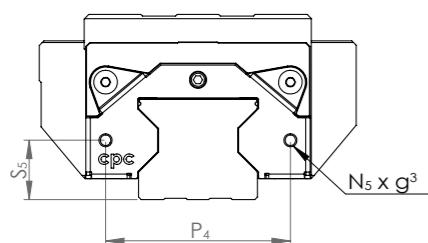

### Dimensions of external NBR seals

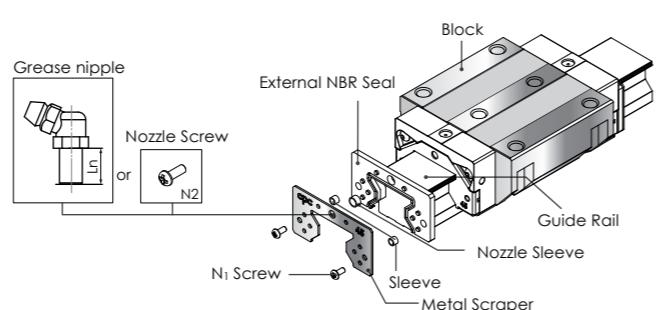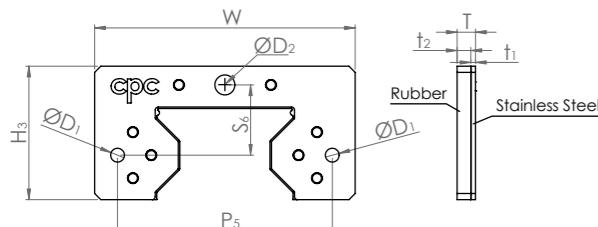



Model Code	Exterior Dimension					Bore Specification				Screw Specification			Nipple	
	T	t1	t2	W	H3	P5	S1	S2	OD1	OD2	N1	N2	Ln	
35	6	1.5	4.5	69	37.6	60	60	20	4.5	6.5	M4x0.5	M6x0.75	16	A/B-M6-XL
45	6	1.5	4.5	84.9	43.5	70	70	22.9	4.5	6.5	M4x0.5	M6x0.75	16	A/B-M6-XL

## Metal-Plastic-Cap Patent Design for Standard Rail-Bolt-Hole (With patent) (Ordering Code: MPC)

### Metal Cap Features Introduction



#### The Most Convenient Metal Cap Used in Industry

- The upper part of the cap is made of stainless steel which can prevent sharp foreign objects from piling up on the bolt-hole and affect the end seal function.
- The lower part of the cap is made of plastic, and can be installed directly on a standard rail without the need for additional bolt-hole slot milling.
- The bolt-hole chamfer for standard rails is C0.2mm. For further dustproof requests, the non-bolt-hole chamfer rail is optional upon ordering. (order code: TR)

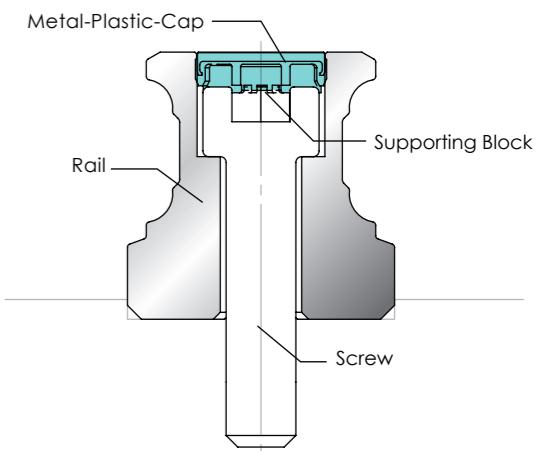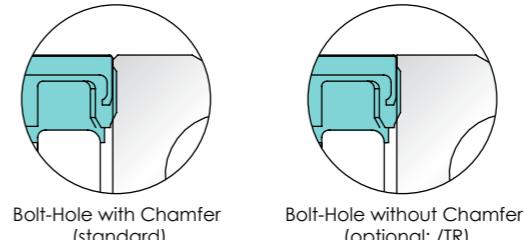


#### Cap can be Smoothly Installed on Bolt-Hole

Bolt-hole cap of conventional linear guides, due to the difficulty of controlling hammering strength, often result in caps being hammered too deep or surface unevenness which leads to the accumulation of dirt or scrap iron. Our **cpc** cap is especially designed with a supporting block to prop up the cap and to fix the screw stably, thus preventing such unnecessary sinking.

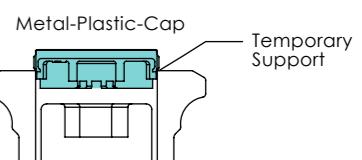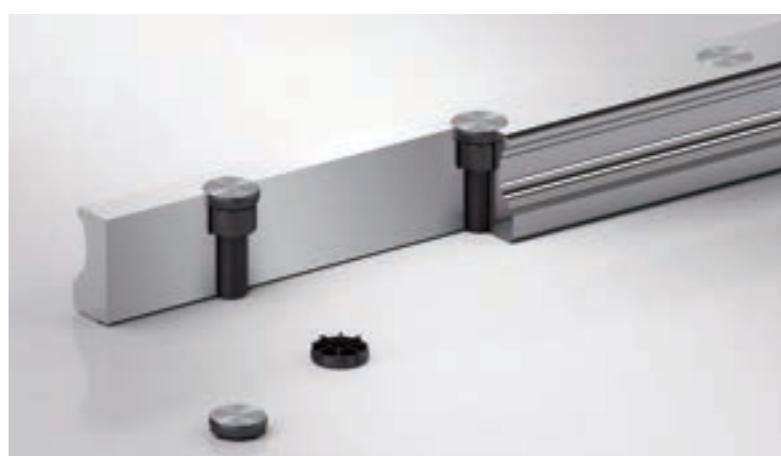

### Dimensions and Specifications

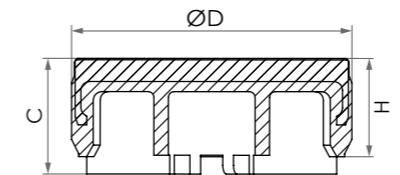

Model Code	Screw	External Diameter D	Cup Height H	Block Height C	Rail
A4	M4	7.7	1.7	2.0	AR15 , WRC21/15, WRC27/20, ARR15
A5	M5	9.7	3.4	4.0	AR20 , ARR20
A6	M6	11.3	2.9	3.5	AR25 , ARR25
A8	M8	14.3	3.9	4.5	AR30 , AR35
A12	M12	20.4	5.0	5.6	AR45 , ARR45
A8-R	M8	14.3	8.0	9.5	ARR35
A14	M14	24.4	6.0	6.5	AR55 , ARR55

## Technical Information

### Load capacity and service life

#### Basic static load capacity $C_0$

The static load along the direction of the force; under this static load, the maximum calculated stress at the center point of the contact surface between the ball and the track:

The value is 4200 MPa when radius of curvature ratio = 0.52


The value is 4600 MPa when the radius of curvature = 0.6

Roller and rail contact surface produces the maximum calculated stress:

The value is 4000 MPa

**cpc**'s design of the roller guide series products has optimized the contact surface between the roller and the raceway of the rail. The line contact stress is evenly distributed. There is no edge stress effect, so they can withstand greater stress, as shown in the right picture.

Note: At this point of maximum stress contact will yield a permanent deformation, which corresponds to 0.0001 diameter of the rolling element. (Above according to ISO 14728-2)

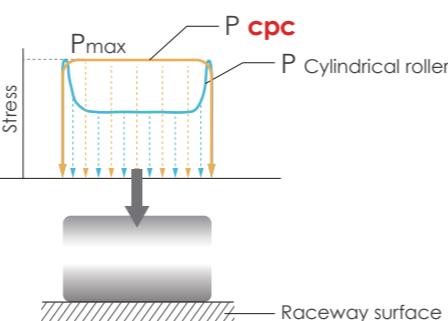

#### Static load safety factor calculation

$$(1) \quad S_0 = C_0 / P_0$$

$$(2) \quad S_0 = M_0 / M$$

$$(3) \quad P_0 = F_{max}$$

$$(4) \quad M_0 = M_{max}$$

Operating situation	$S_0$
General operation	1~2
Shock or impact	2~3
High precision and smooth operation	$\geq 3$

#### Equivalent static load $P_0$ and basic static torque $M_0$

The application of the static load capacity of the linear guide series must be considered:

- Static load of linear guide
- Allowable load of screw fixation
- Permissible load of connected bodies
- The required static load safety factor for the application

The equivalent static load and static torque are the maximum load and torque values, refer to equations (3) and (4).

#### Static load safety factor $S_0$

In order to be able to withstand the permanent deformation of the linear bearing and ensure that it will not affect the accuracy and smooth operation of the linear slide system. The static load safety factor  $S_0$  is calculated as equations (1) and (2).

$S_0$  Static load safety factor

$C_0$  Basic static load N in direction of load

$P_0$  Equivalent static load N in direction of load

$M_0$  Basic static torque Nm in direction of load

$M$  Equivalent static torque Nm in direction of load

#### When the block alone experiences the torque

If the block alone experiences the torque from  $M_p$  and  $M_y$  direction, the maximum allowable torque for the block to run smoothly is 0.2 to 0.3 times static torque. And the block with larger preload would have larger maximum allowable torque and vice versa. When static torque  $M_p$  and  $M_y$  is larger than maximum allowable torque, the jumping of the block will be caused when the ball is rolling through the loaded / unloaded region in the block. If you have above mentioned design problem, please contact our technical department.

#### Basic dynamic load capacity $C_{ISO}$ (general design) /

#### $C_{cage}$ (ball chain design )

$$C_{ISO} : C_{100} / C_{50}$$

Definition:  $C_{100}$  is a radial load with constant magnitude and direction; when the linear bearing is subjected to this load, its rated life can theoretically reach a walking distance of 100 kilometers, and  $C_{50}$  is a walking distance of 50 kilometers. (Above according to ISO 14728-1)

According to ISO 14728-1 for the bearing steel used in the current technology, the calculated life span of 90% survival rate for a single or batch of sufficient and identical linear bearings under normal manufacturing quality and normal operating conditions is as follows:

$$(5) \quad L = \left( \frac{C_{100}}{P} \right)^\alpha \cdot 10^5$$

$$L = \left( \frac{C_{50}}{P} \right)^\alpha \cdot 5 \times 10^4$$

$L$  = rated life

$C_{100} / C_{50}$  = Dynamic Load Rating (N)

$P$  = equivalent load (N)

When using a ball type linear guide  $\alpha = 3$

When using roller linear guide  $\alpha = \frac{10}{3}$

Please refer to equations (6) and (7) for a comparison of the basic rated load capacity defined by the two types of basic load capacity conversion when the standard rated load capacity  $C_{50}$  is taken as the standard when the 50 km distance is taken as the rated life. (according to ISO14728-1)

#### Ball

$$(6) \quad C_{50} = 1.26 \cdot C_{100}$$

$$(7) \quad C_{100} = 0.79 \cdot C_{50}$$

$C_{cage}$  is a basic dynamic load capacity value of block with ball chain, which is 120 to 130% of the  $C_{ISO}$  value according to the practical test (see Page 8). Formulas (5), (6), and (7) also apply to  $C_{100/cage}$  and  $C_{50/cage}$

According to the operating velocity and frequency, the service distance can be converted to service life, assuming the equivalent load and average velocity are constant.

$$(8) \quad L_h = \frac{L}{2 \cdot s \cdot n \cdot 60} = \frac{L}{v_m \cdot 60}$$

$L_h$  = Rated life (h)

$L$  = Rated life for walking 100 km (m)

$s$  = Single stroke (m)

$n$  = Frequency of reciprocating stroke (min<sup>-1</sup>)

$v_m$  = Average velocity (m/min)

## Technical Information

### Load capacity and life

#### Equivalent load and Velocity

When the load and velocity are not constant, all actual loads and velocities must be considered, and it will impact the service life.

For each segment of each block, when the load changes, the equivalent load is calculated according to formula (9).

$$(9) \quad P = \sqrt{\frac{q_{s1} \cdot F_1^a + q_{s2} \cdot F_2^a + \dots + q_{sn} \cdot F_n^a}{100}}$$

$P$  = equivalent load (N)

When using ball-type linear guide  $\alpha = 3$

When using roller-type linear guide  $\alpha = \frac{10}{3}$

$q_s$  = portion of working distance per segment (%)

$F_i$  = load per segment (N)

When the velocity changes, the equivalent velocity is calculated according to formula (10).

$$(10) \quad \bar{v} = \frac{q_{v1} \cdot v_1 + q_{v2} \cdot v_2 + \dots + q_{vn} \cdot v_n}{100}$$

$\bar{v}$  = equivalent velocity (m/min)

$q_v$  = portion of working time per segment (%)

When the load and velocity all change, the equivalent load is calculated according to formula (11).

$$(11) \quad P = \sqrt{\frac{q_{v1} \cdot v_1 \cdot F_1^a + q_{v2} \cdot v_2 \cdot F_2^a + \dots + q_{vn} \cdot v_n \cdot F_n^a}{100 \bar{v}}}$$

$P$  = equivalent load (N)

When using ball-type linear guide  $\alpha = 3$

When using roller-type linear guide  $\alpha = \frac{10}{3}$

$q_v$  = percentage of working time per segment (%)

$v$  = velocity of each segment (m/min)

$\bar{v}$  = equivalent velocity (m/min)

$F_i$  = load per segment (N)

When the linear guide is subjected to any angular load and the direction of the force other than the horizontal or vertical direction, the approximated value of equivalent load is calculated as (12).

$$(12) \quad P = |F_x| + |F_y|$$

$P$  = equivalent load (N)

$F_x$  = force at horizontal component (N)

$F_y$  = force at vertical component (N)

When the linear guide experience both load and torque at the time, the approximated value of equivalent load is be calculated by formula (13)

$$(13) \quad P = |F| + |M| \cdot \frac{C_0}{M_0}$$

$P$  = equivalent load (N)

$F$  = load applied to the LM guide (N)

$M$  = static torque (Nm)

$C_0$  = basic static load direction (N)

$M_0$  = basic static torque in direction of force (Nm)

### Operating temperature range

-40°C~80°C

The Linear Guide Series have a permissible operating temperature between -40 °C and 80 °C, and the maximum temperature for short-term operation can reach +100 °C.

### Friction

The linear guides have stable and constant running friction and slight start-up friction, which brings out the properties of the product's low frictional resistance to the full.

### Friction

$$F_{rn} = \mu \cdot F$$

$F_{rn}$  = Friction (N)

$F$  = Load (N)

The Rller Guide Series friction factor is approx.  $\mu=0.001\sim0.002$

### Friction Factors

- Sealing system
- Collision between rolling elements and rolling elements during operation
- Collision of the rolling elements with the return path

- Resistance caused by the rolling and sliding phenomenon at the contact point of the rolling element and the raceway of the rail
- Resistance caused by the squeezing of lubricant when the rolling elements running
- Resistance caused by contaminations

In general, the loads on the linear guide exert on the four major planes. However it can be the load from any angle. In this case, the life of the linear guide is reduced. This can be interpreted by the flow of forces inside the system.

### Line chart

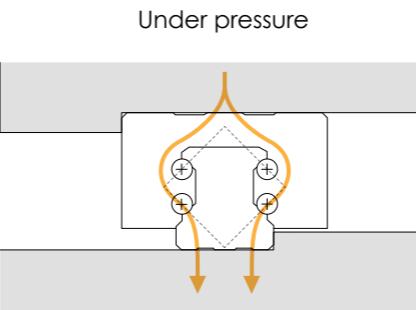


Figure A

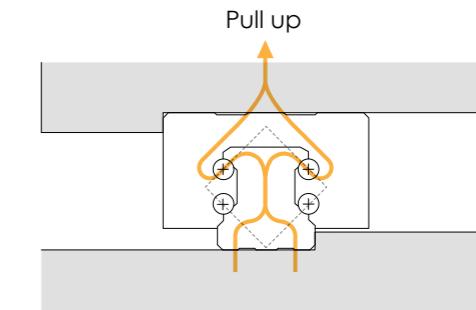


Figure B

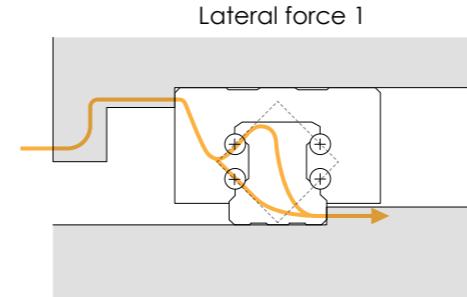


Figure C

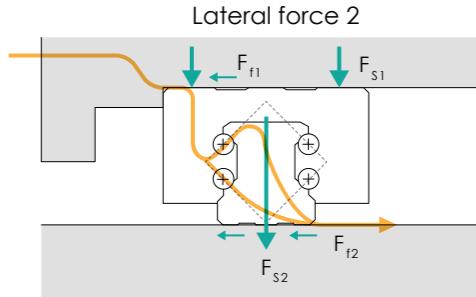


Figure D

$F_{s1}, F_{s2}$  : screw fixation  
 $F_{f1}, F_{f2}$  : frictional resistance  
 $F_f = F_s \cdot \mu_0$

As can be seen from the three diagrams in Figure A to Figure D, when subjected to upward, downward and lateral loads, the force flow will be distributed to the two ball transfer.

## Technical Information

### Load capacity and life

#### Line chart

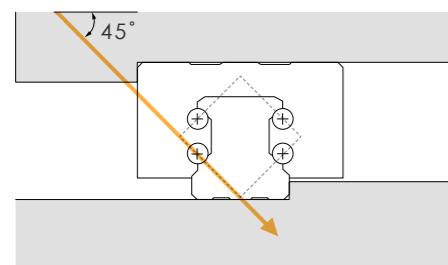


Figure E


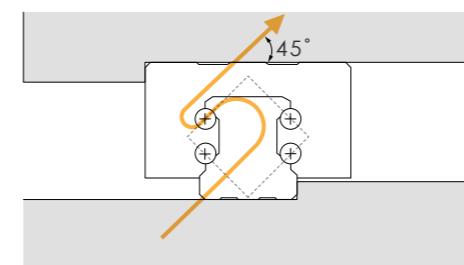


Figure F

As shown in the two diagrams in Figures E and F, the load acting on the 45-degree angle has the greatest effect on the system's life because the transfer of force is limited to a single row of balls.

When the load is applied horizontally or vertically ( $0^\circ$ ,  $90^\circ$ ,  $180^\circ$ ,  $270^\circ$ ), the equivalent load of the slide is equal to the actual load. When the load angle is  $45^\circ$ , its equivalent load is approximately 1.414 times that of the main direction. (as shown in formula (12))

When the same load is at different angles, the comparison of equation (12) and the actual equivalence load is as shown in the following figure.

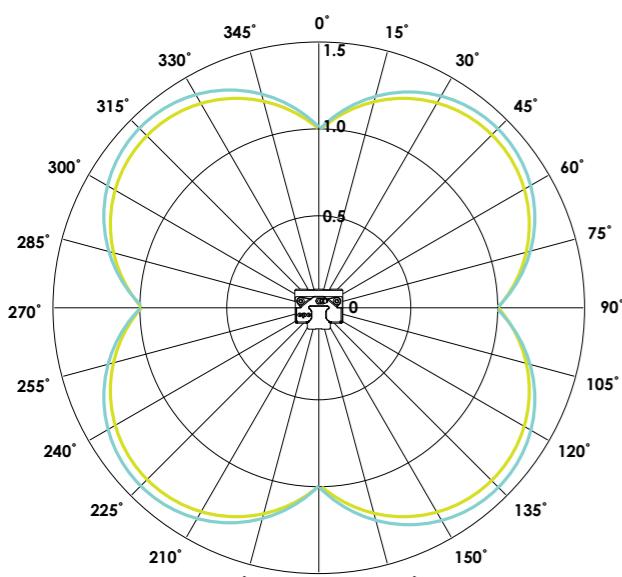


Equation (12) (Page 15) calculates the approximate value of the equivalent load

Actual equivalence load

Therefore, in order to increase the service life of the linear system, it should be installed in the appropriate direction to bear the load. Otherwise, the service life will be greatly reduced, as shown in the figure below. Since the relationship between life and load is as the power of formula (5), when the acceptance angle is  $45^\circ$ , the service life will be significantly reduced.


The following is the life L comparison chart (in %) for different angles under the same load.

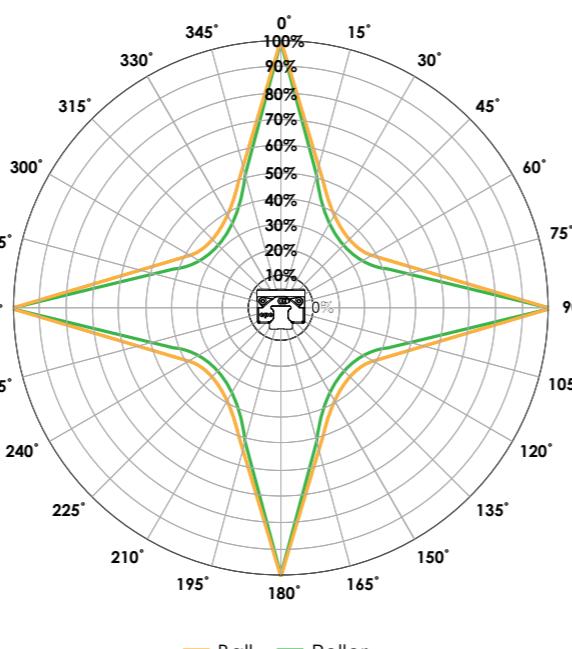


Ball

Roller

The following is a comparison diagram of the equivalent load approximate value and the actual equivalent load calculated by Equation (13). The example uses the ARC25MN linear guide to withstand a fixed down pressure and the torque gradually increases. The above figure shows the torque in the  $M_r$  direction. The figure below shows the torque in the  $M_{p/y}$  direction.

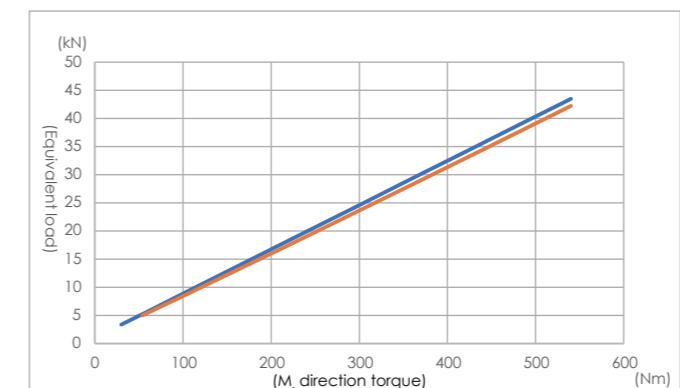

Equation (13) (Page 15) Calculate the approximate value of the equivalent load  $|\frac{M_r}{M_{r0}}| \cdot C_0$   
Actual equivalence load

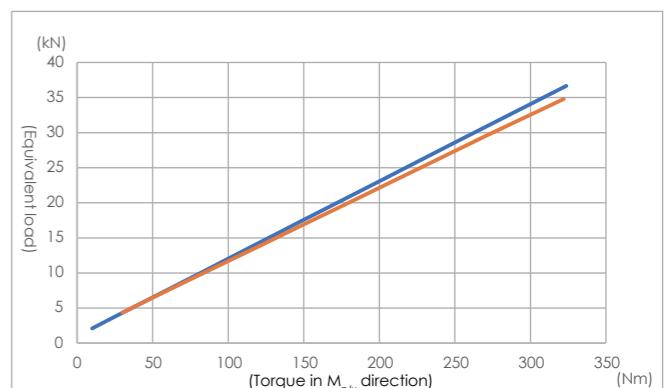

Equation (13) (Page 15) calculates the approximate value of the equivalent load  $|\frac{M_{p/y}}{M_{p/y0}}| \cdot C_0$   
Actual equivalence load

### Load calculation

1. The load exert on the linear guide would varies due to the position of object's center of gravity, thrust position and acceleration / deceleration induced inertia.
2. Because of the uneven distribution of force on linear guide, when a certain part of rail, or when a force exertion point is damaged, the linear guide system would start to malfunction.
3. The point with largest force exertion must be identified, and be used reference to calculate the equivalent load, to ensure the reliability of service life calculation.

#### Ball


$$Q \propto F (Dw^{\frac{1}{2}}, \delta^{\frac{3}{2}}, C_b^{\frac{3}{2}})$$

$Q$  = load  
 $\delta$  = amount of rolling element deformation  
 $Dw$  = ball diameter  
 $C_b$  = geometric constant

#### Roller

$$Q \propto F (\delta^{\alpha}, \ell_{eff}^{\beta})$$

$Q$  = load  
 $\delta$  = amount of rolling element deformation  
 $\ell_{eff}$  = contact length

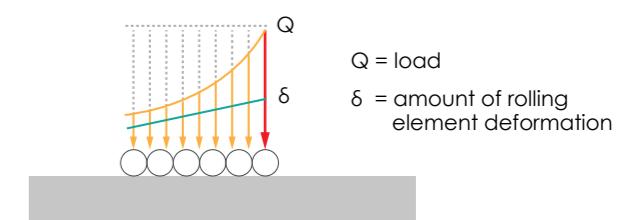

As shown by the formula, the relationship between the amount of deformation of the rolling element and load is not linear. A larger deformation will cause the non-linear increase of load.

Therefore by using the **cpc** self-developed program, the "Loading, Lifetime, & Rigidity Analysis Software of Linear Guide System (LLRAS)", a precise service life estimation can be derived. This is done by optimum calculation of deformation and rotation when a linear guide experience load, in this case the accurate equivalent load can be calculated.

## Technical Information

### Loading, Lifetime, & Rigidity Analysis Software of Linear Guide System (LLRAS)

#### Data input guidance

1. Set the slide rail position, the number of slides on the slide



3. Set the exercise state



Variables can be set:  
- Working status  
- Drive position  
- Actuation frequency

2. Set the carriage size model



Variables can be set:  
- Block span  
- Block type  
- Block preload

4. Set external force and torque position, size, direction




Variables can be set:  
- External force (torque) intensity  
- External force (torque) position  
- External force (torque) working zone

## Technical Information


### Loading, Lifetime, & Rigidity Analysis Software of Linear Guide System (LLRAS)

#### 5. Set the quality position size

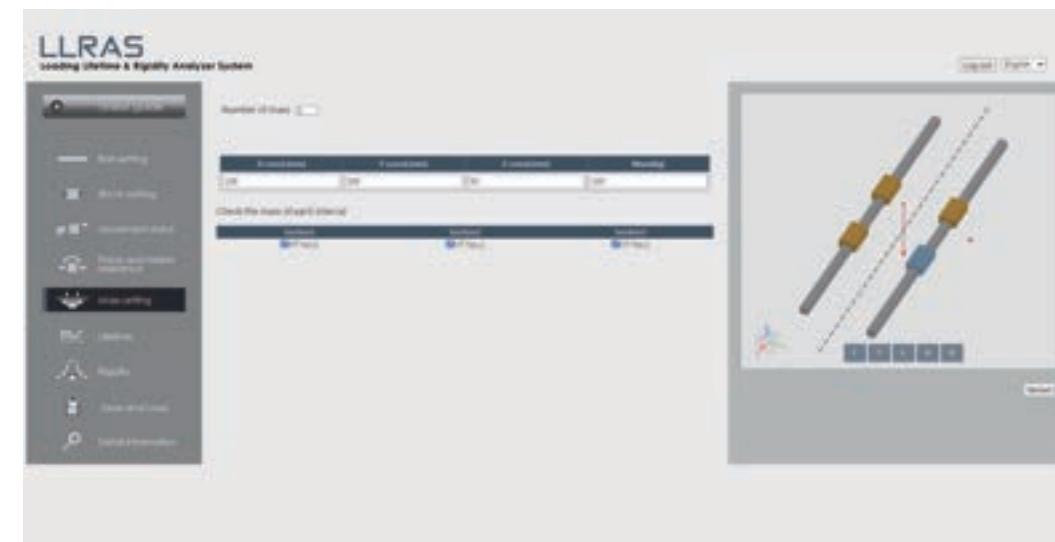

- Variables can be set:
- Center of gravity position
  - Center of gravity dimension
  - Load range

#### 6. Check if the settings are correct from the 3D chart

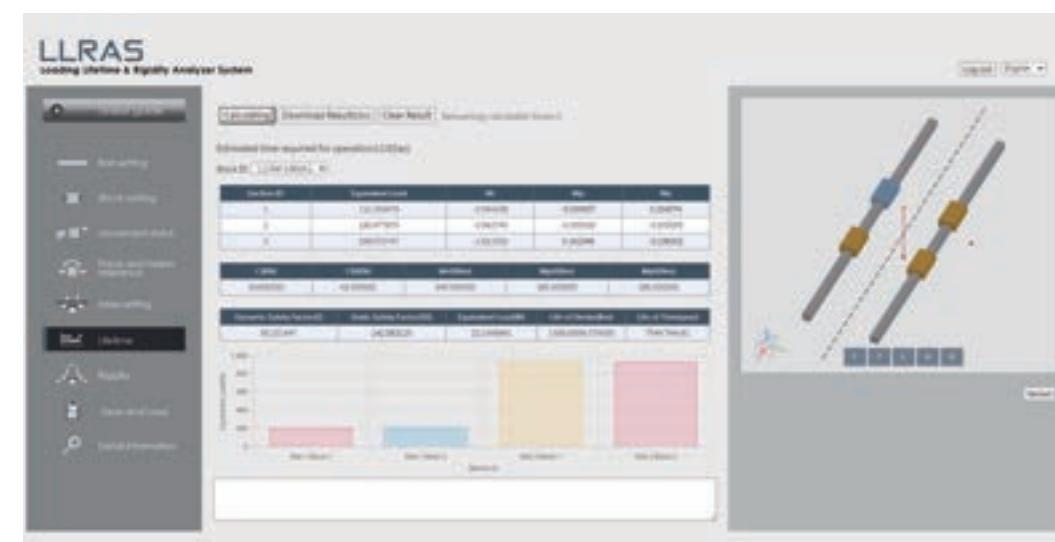



The calculation results are shown in the figure, and the information such as force and equivalent load, safety factor, and life span of each section can be obtained, and the deformation of any measured point can also be obtained.\*

This program can be used to calculate the installation and dimension design of various linear slide rails under different load and movement conditions. The obtained information such as deformation amount, force distribution, and life span can help to provide appropriate and correct design recommendations.


\* For the calculation of amount of deformation, only the rolling object is considered. For actual deformation the steel body of block must be considered as well. When the load > 20% C0, the actual deformation is 1.5 times larger than calculated deformation. When Load = C0, the actual deformation is 2~2.5 times of calculated deformation.

### Application Example

Using the ARC 25 MN VC block, the schematic diagram of the mechanism is as follows:

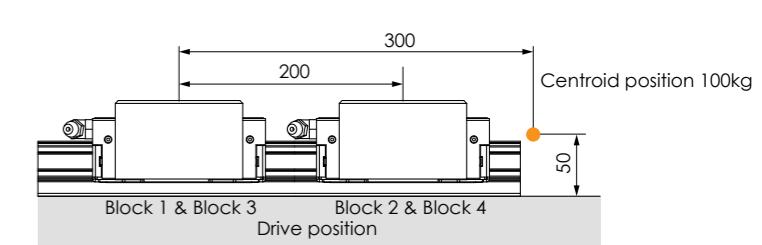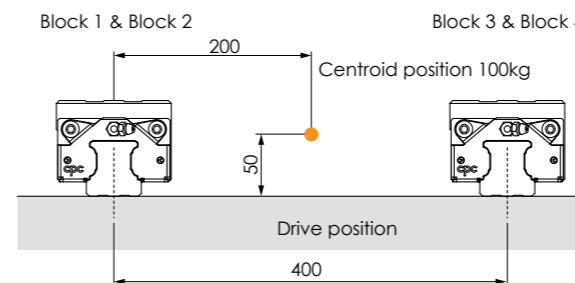

Motion status is as follows

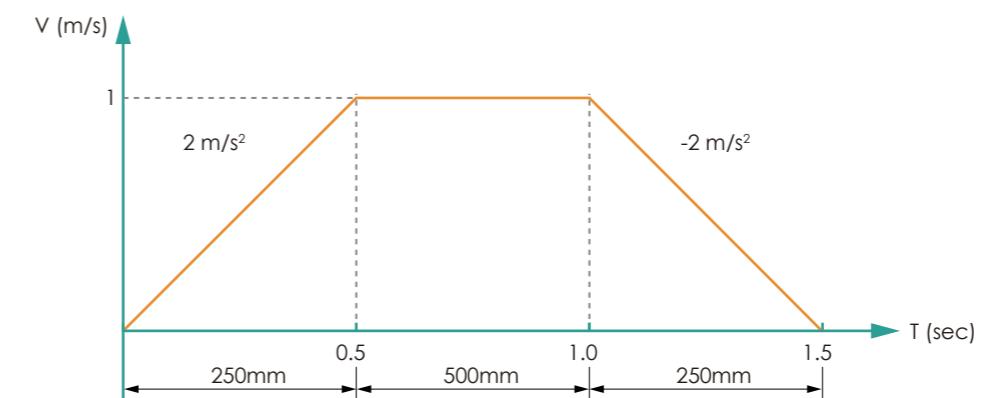

Traditional calculated results obtained by geometric distribution.  
Unit:N

cpc	Block 1	Block 2	Block 3	Block 4	Unit:N
At acceleration	348.6	914.5	348.6	914.5	
At constant velocity	384.0	949.9	384.0	949.9	
At deceleration	419.4	985.3	419.4	985.3	
Average load	385.9	951.0	385.9	951.0	

	Block 1	Block 2	Block 3	Block 4
At acceleration	220	711	220	711
At constant velocity	245	736	245	736
At deceleration	270	761	270	761
The maximum value of average load				736

### Results calculated by program

In this case, the calculated result of equivalent load is 30% higher than result obtained by traditional geometric distribution method, and the service life is about 2 times different.

If there is a demand for life and rigidity calculation, please fill in form of [【Linear guide service life calculation and model selection】](#) and contact **cpc** technical department.

## Technical Information


The maximum bearing capacity of linear guide is not only related to the static load capacity  $C_0$ , but also the screw mounting of coupling parts. Factors such as length of block, distance between rails, size of screws, and contact width of rail would impact the maximum bearing capacity of screw mounting.

### Screw tightening torque (Nm)

Strength grade 12.9 Alloy steel screws	steel	cast iron	Non-ferrous metals
M3	2.0	1.3	1.0
M4	4.1	2.7	2.1
M5	8.8	5.9	4.4
M6	13.7	9.2	6.9
M8	30	20	15
M10	68	45	33
M12	118	78	59
M14	157	105	78

The lateral bearing capacity (without support from edge and lateral mounting)

Linear guide often experience lateral load when used; in the case of mounting screw only, the lateral bearing capacity is suggested to be determined by the static friction force resulted from the screw tightening torque. If the maximum lateral load is exceeded, the support from the edge, lateral mounting and plugs are possible options to enhance the load capacity.

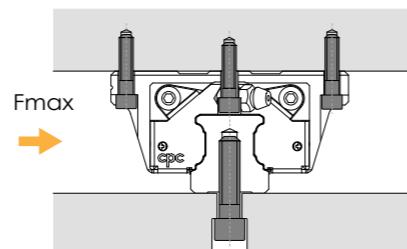


According to DIN637, DIN SIO 12090-1 and DIN EN ISO 898-1 regulation, when the tensile strength, torque and lateral force exert on class 8.8 alloy steel screw is larger than the values in table below, the screw mounting and design of edge support must be revised to avoid loose.

### Screw maximum tensile strength and torque

size	ball type						roller type					
	short		standard		long		standard		long			
	$F_{z,max}$ N	$M_{t,max}$ Nm										
15	3200	22	3700	26	4200	30	7200	50	8000	60		
20	5500	51	6400	60	7300	68	12500	115	14500	134		
25	8100	87	9400	100	10800	120	18700	190	21000	240		
30	15900	210	18500	240	21100	280	36900	470	42200	560		
35	-	-	18500	300	21100	340	36900	590	42200	680		
45	-	-	45900	970	52400	1100	91700	1900	104800	2200		
55	-	-	63700	1600	72800	1800	127400	3200	145600	3600		

### Screw lateral bearing capacity

size	ball type			roller type	
	short	standard	long	standard	long
	$F_{y,max}$ N	$F_{y,max}$ N	$F_{y,max}$ N	$F_{y,max}$ N	$F_{y,max}$ N
15	240	280	320	550	630
20	410	480	550	950	1050
25	610	710	810	1400	1600
30	1200	1400	1600	2800	3200
35	-	1400	1600	2800	3200
45	-	3400	3900	6900	7900
55	-	4800	5500	9600	11000





When class 10.9 class alloy steel screw is used, the value is about 1.4 times larger than the value in table above.  
When 12.9 class alloy steel screw is used, the value is about 1.68 times larger.

### Lateral bearing surfaces and lateral fixing elements


When the lateral load is greater than the lateral load capacity, the lateral bearing surface is required to bear the lateral force. If the lateral force is bidirectional, Lateral fixing elements can be used to provide a bidirectional lateral load capability of the linear guide on the other side of the side bearing surface, and help close to the lateral bearing surface, the lateral straightness and side load capacity after installation will be greatly improved, and its allowable value will vary according to the type of fixed component.

The following diagram shows several common elements.

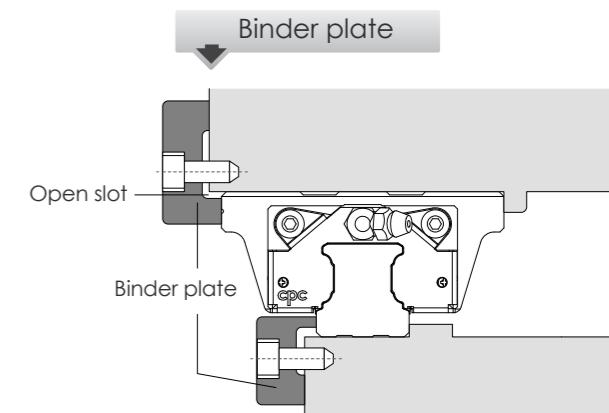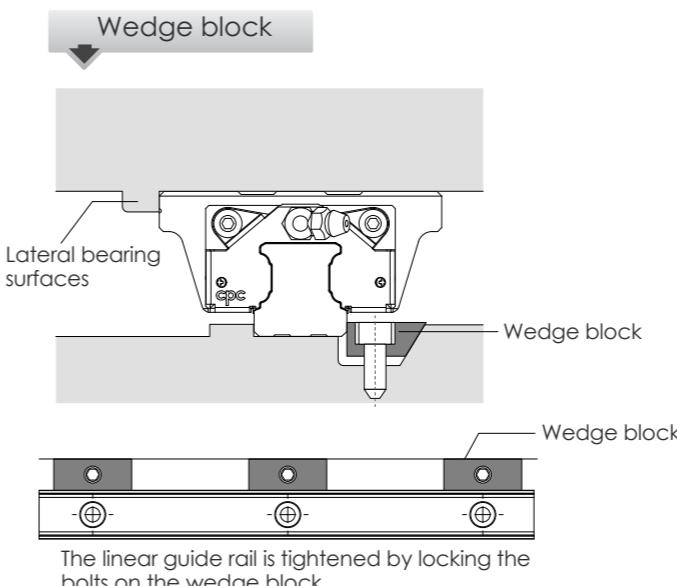


The open slot must be machined to prevent interference between the linear guide and carriage on the corners during installation.

### Socket set screws

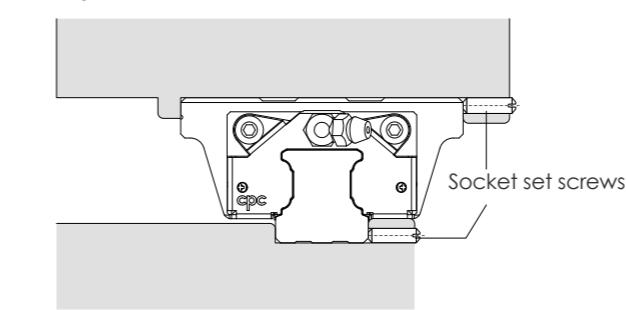

When the installation space is limited, the size of lateral mounting element must be considered.

### Mandrel fixing

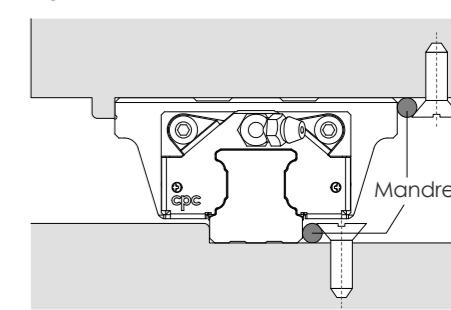

Use the slope of the nut to advance the roller to achieve the effect of tightening the linear guide.

## Technical Information

### Preload and clearance

The ARC/HRC/ERC, ARD/HRD/ERD linear guides provide 4 different preload classes VC, V0, V1, V2.

ARC/ARD/WRC										
Class	Description	Preload Value	Clearance ( $\mu\text{m}$ )							Application
			15	20	25	30	35	45	55	
		WRC21/15	WRC27/20							
VC	Clearance	0	+5~+0	+5~+0	+5~+0	+5~+0	+5~+0	+5~+0	+5~+0	Smooth motion, low friction
V0	Light Preload	0.02C	+0~4	+0~5	+0~6	+0~7	+0~8	+0~10	+0~12	For precision situations, smooth motion
V1	Medium Preload	0.05C	-4~10	-5~12	-6~15	-7~18	-8~20	-10~24	-12~28	High stiffness, precision, high load situations
V2	Heavy Preload	0.08C	-10~16	-12~18	-15~23	-18~27	-20~31	-24~36	-28~45	Super high stiffness, precision and load capacity

HRC/ERC/HRD/ERD										
Class	Description	Preload Value	Clearance ( $\mu\text{m}$ )							Application
			15	20	25	30	35	45	55	
VC	Clearance	0	+5~+0	+5~+0	+5~+0	+5~+0	+5~+0	+5~+0	+5~+0	Smooth motion, low friction
V0	Light Preload	0.02C	+0~4	+0~5	+0~6	+0~7	+0~8	+0~10	+0~12	For precision situations, smooth motion
V1	Medium Preload	0.08C	-4~12	-5~14	-6~16	-7~19	-8~22	-10~25	-12~29	High stiffness, precision, high load situations
V2	Heavy Preload	0.13C	-12~19	-14~23	-16~26	-19~31	-22~35	-25~40	-29~46	Super high stiffness, precision and load capacity


### Operating Temperature

The Linear Guide Series of standard ball guide, wide ball guide and roller guides have a permissible operating temperature between  $-40^\circ\text{C}$  and  $80^\circ\text{C}$ , and the maximum temperature for short-term operation can reach  $+100^\circ\text{C}$ .

## Installation Notice

### Dimension of reference edge

To ensure that the linear guide is precisely assembled with the machine table, **cpc** devices have a recess installed in the reference edge corner. The corner of the machine table must be smaller than the chamfer of the linear guide to avoid interference. To consult on chamfer sizes and shoulder heights, please refer to the table below.

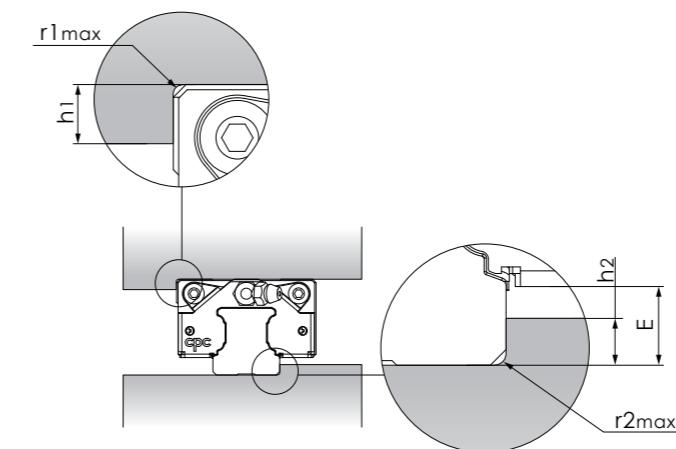

ARC/HRC/ERC, ARD/HRD/ERD					
Type	r1max	r2max	h1	h2	E
15	0.5	0.5	4.0	2.5	3.3
20	0.5	0.5	5.0	4.0	5.0
25	1.0	1.0	5.0	5.0	6.0
30	1.0	1.0	6.0	5.5	6.6
35	1.0	1.0	6.0	6.5	7.6
45	1.0	1.0	8.0	8.0	9.3
55	1.5	1.5	10.0	10.0	12.0

WRC					
Type	r1max	r2max	h1	h2	E
21/15	0.4	0.4	5.0	2.0	2.7
27/20	0.4	0.4	5.0	3.0	3.5


  

ARR/HRR/LRR					
Type	r1max	r2max	h1	h2	E
15	0.5	0.5	4	2	2.9
20	0.5	0.5	5	3.4	4.4
25	1	1	5	4	5
35	1	1	8	5	6
45	1	0.5	10	7	8
55	1.5	1.5	10	8	10

### Rail Joint

The standard length of our large rails is 4 meters. If longer rails are required, **cpc** can provide a joint rail solution for which the joint number will be marked on the rail.

1. As shown in figure A, please follow the joint number to assemble.
2. For more than two units in each axis, to avoid accuracy effects from multiple blocks passing through the same connection point, we advise to use the connection points separately as shown on figure B.
3. Please use the slide as a connection point to tighten the slide before tightening the torques to fasten the screws from inside to outside.

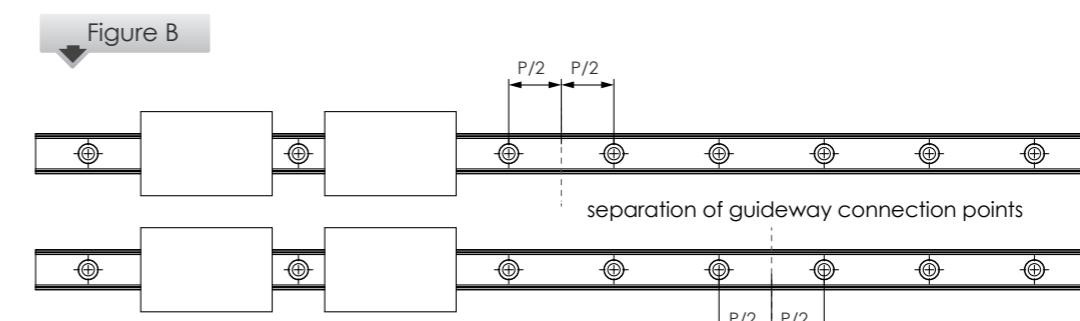

## Installation instructions


### Installation surface geometry position accuracy

The rough finishing or milling on installation site will impact the working accuracy of linear guide, and reduce the service life of both standard, wide ball type linear guide and roller type linear guide. The accuracy of installation site and linear guides are critical factors to determine the accuracy of work bench. When the error of installation site is larger than the value calculated by following formula, the working resistance and service life will be impacted.

$$e1 \text{ (mm)} = b \text{ (mm)} \cdot f1 \cdot 10^{-4}$$

$$e2 \text{ (mm)} = d \text{ (mm)} \cdot f2 \cdot 10^{-5}$$


$$e3 \text{ (mm)} = f3 \cdot 10^{-3}$$

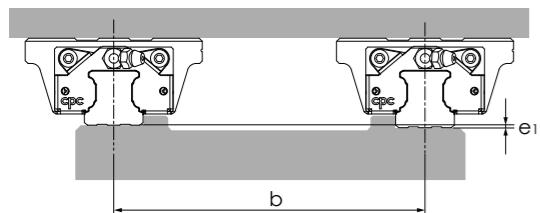

### Installation datum plane

Rail: Both edges of rail can be reference edge, it shouldn't be marked separately.


Block: The side steel body of the block with  
 1. milled surface  
 2. Without groove mark can be the reference side.

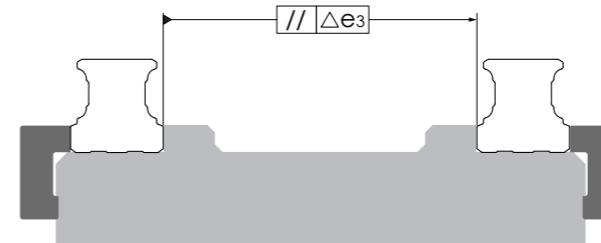

Applicable to 15-55 all models

ARC/HRC/ERC (f1)				
Block length	VC	V0	V1	V2
MS / FS	5.2	3.5	2.2	1.1
MN / FN	4.5	3.1	1.8	0.8
ML / FL	4.2	2.8	1.7	0.7

ARR/HRR/LRR (f1)				
Block length	VC	V0	V1	V2
MN / FN	1.3	1.1	1.0	0.8
ML / FL	1.2	1.1	0.9	0.7
MXL / FXL	1.2	1.0	0.9	0.7

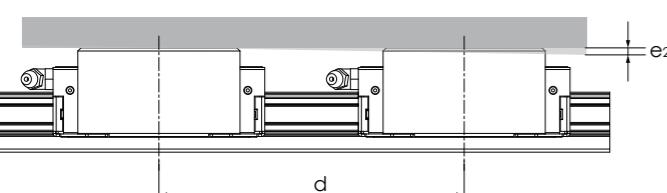

ARC/HRC/ERC (f2)				
Block length	VC	V0	V1	V2
MS / FS	43.1	29.7	18.3	8.9
MN / FN	26.0	17.5	10.5	4.8
ML / FL	18.4	12.3	7.3	3.1

ARR/HRR/LRR (f2)				
Block length	VC	V0	V1	V2
MN / FN	7.1	6.2	5.2	4.3
ML / FL	5.3	4.7	3.9	3.2
MXL / FXL	4.2	3.6	3.0	2.5

ARC (f3)				
Block length	VC	V0	V1	V2
15 MS / FS	20	14	9	5
15 MN / FN	18	13	8	4
15 ML	16	12	7	3
20 MS / FS	25	18	12	6
20 MN / FN	23	16	10	5
20 ML	21	14	9	4
25 MS / FS	31	22	15	8
25 MN / FN	27	20	13	6
30 MS / FS	38	28	18	10
30 MN / FN	33	24	15	8
30 ML	31	22	14	7
35 MN / FN	37	27	17	8
35 ML	35	25	16	8
45 MN	49	35	23	11
45 ML	45	32	21	10
55 MN	65	46	30	15
55 ML	62	44	28	13

HRC / ERC (f3)				
Block length	VC	V0	V1	V2
15 MN / FN / FN-R	18	13	8	4
15 ML / ML-R / FL / FL-R	16	12	7	3
20 MN / FN / FN-R	23	16	10	5
20 ML / ML-R / FL / FL-R	21	14	9	4
25 MS	31	22	15	8
25 MN / FN / FN-R	27	20	13	6
25 ML / ML-R / FL / FL-R	25	18	11	5
30 MN / FN / FN-R	33	24	15	8
30 ML / ML-R / FL / FL-R	31	22	14	7
35 MN / FN / FN-R	37	27	17	8
35 ML / ML-R / FL / FL-R	35	25	16	8
45 MN / FN / FN-R	49	35	23	11
45 ML / ML-R / FL / FL-R	45	32	21	10
55 MN / FN / FN-R	65	46	30	15
55 ML / ML-R / FL	62	44	28	13

ARR/HRR/LRR (f3)				
Block length	V0	V1	V2	
15 MN / FN	5	4	2	
15 ML / FL	5	3	2	
20 MN / FN	7	5	2	
20 ML / FL	6	4	2	
25 MN / FN	7	5	2	
25 ML / FL	7	5	2	
25 MXL / FXL	6	5	2	
35 MN / FN	9	6	3	
35 ML / FL	8	5	2	
35 MXL / FXL	8	5	2	

ARR/HRR/LRR (f3)				
Block length	V0	V1	V2	
45 MN / FN	11	7	4	
45 ML / FL	10	7	3	
45 MXL / FXL	10	6	3	
55 MN / FN	13	9	4	
55 ML / FL	12	9	4	
55 MXL / FXL	11	8	3	


## Installation instructions

### Rail installation

Diagram	Description	Feature
	<ul style="list-style-type: none"> <li>No Straightening</li> <li>Not allowed</li> </ul>	No precision Low lateral bearing capacity
	<ul style="list-style-type: none"> <li>Straightening by pin</li> <li>Not suggested</li> </ul>	Low precision Low lateral bearing capacity
	<ul style="list-style-type: none"> <li>Straightening based on straight edge, calibrated by meter</li> </ul>	Low to mid precision Low lateral bearing capacity
	<ul style="list-style-type: none"> <li>Place the rail on a supporting edge (Precision vise applied)</li> </ul>	High precision One side with high lateral bearing capacity
	<ul style="list-style-type: none"> <li>With support edge and lateral mounting screw</li> </ul>	Very high precision High lateral bearing capacity on both sides.


## Recommended precision measurement method

The working accuracy of linear guide is defined by the parallelism between block and rail (height, side). In practical application the linear accuracy is required, the measuring method is diverse, so we would suggest following measure to acquire the linear accuracy of linear guide.

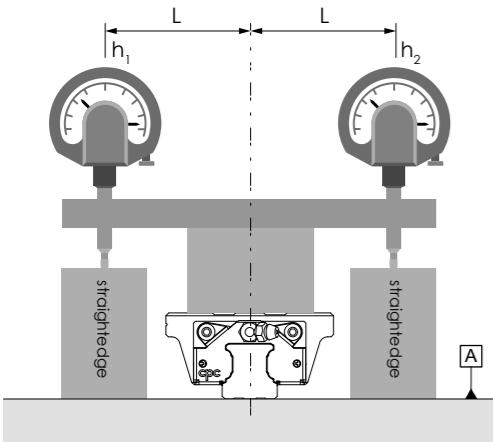

H The horizontal working accuracy  $\parallel P$  +  
base plane flatness  $\square A = |h_1 - h_2|$  / total length  
(above mentioned method can be used to exclude the skew error of rail on roll direction)

\* When the error of flatness of base plane is 0, the value is the linear working accuracy of rail at the certain height  
(Please refer to table of working precision page 31)

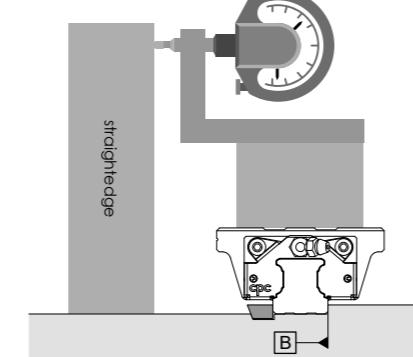

W The horizontal working accuracy  $\parallel P$  +  
the straightness of rail installation  $\square B$

\* When the error of the straightness of the rail is 0, the value is the horizontal working accuracy on the side.  
(Please refer to table of working precision page 31)

## Lubrication

### Function

When operating the linear guides under sufficient lubrication, a one-micron layer of the oil film at the contact zone separating the loaded rolling elements and the raceway.

Sufficient lubrication will:

- Reduce the friction      - Minimize wear      - Prevent oxidation      - Dissipate heat and increase operating life.

### Lubrication methods and note on lubrication

- The block already contains lubricants that can be directly installed on the machine without additional cleaning.
- If cleaning of the block is required which the oil storage is equipped, please wait until the cleanser and clean naphtha in the oil storage are dry, and then put the block in lubricating oil, so that the oil storage can absorb enough lubricating oil before it will be installed in Machine.
- Before the first start-up, the carriage and the rail must be protected by adding lubricating grease and contact with liquid or solid contaminants must be avoided.
- The **cpc** block is provided with lubrication holes at the front and rear ends, as well as left and right and on the top. The grease can be injected into the block through the holes. The amount of grease required for a single block is given in the table below.
- The block must run back and forth while lubricating.
- Must consistently provide an oil film on the surface of the rail, which is easily noticeable optically.
- If dry and discolored, relubrication should be carried out immediately, and the relubrication interval should be determined according to the environment and conditions of use.
- The user must inform in advance if it is used in a cleanroom environment or requires acid and alkali resistance.
- If the use of a guide deviates from the horizontal installation, the use of oil lubrication must be carefully checked.
- The re-lubrication interval must be shortened if the travel stroke is < 2 or > 15 times the length of the steel body of the runner block.
- If the stroke is less than two times the steel body of the block, the grease must be injected through the lubrication hole from the left and right of the block and then run on a rail that is at least three times the length of the block to distribute the grease evenly in the block. Repeat this step twice.
- For the central lubrication system, cpc recommends the use of liquid grease NLGI 00 or NLGI 000.

### Precautions when lubrication with oil

- If indicate "oil lubrication" on the order, the carriage provided will not be pre-filled with grease.
- If the block already has grease inside and the grease is different from the grease set by the customer or has exceeded the 12-month shelf life, you must clean the block before assembling. Test the lubricants to avoid grease incompatibility. Ensure that the channel is free, and the lubricant can flow to the rolling elements and be lubricated.
- If using the grease nipple combined with the tubing kit or the set screws for the lubricating oil inlet channel, must wrap it with a tape seal to achieve a leakproof effect.

### Space for grease in the block inside

unit : cm <sup>3</sup>			
ARC/HRC/ERC, ARD/HRD/ERD			
Size	short (S)	standard (N)	long (L)
15	1.4	2	3.2
20	2.3	4	5.5
25	3.9	7	9.5
30	5.9	10	14
35	-	16	21
45	-	32	40
55	-	53	66.5

unit : cm <sup>3</sup>			
ARC/HRC/ERC, ARD/HRD/ERD (ball chain type)			
Size	short (S)	standard (N)	long (L)
15	1.2	1.5	2.5
20	2.3	3.5	5
25	3.9	7	9
30	5.4	9	12.5
35	-	15	19.5
45	-	30	37
55	-	-	-

unit : cm <sup>3</sup>	
WRC (ball chain type)	
Size	standard (N)
21/15	2.7
27/20	5.3


unit : cm <sup>3</sup>			
ARR/HRR/LRR			
Size	standard (N)	long (L)	extra long (XL)
15	3.7	4.5	-
20	6.1	7.2	-
25	9.5	10.8	11.9
30	12.4	13.7	15.1
35	16.2	18.0	21.3
45	22	26.4	30.8
55	31.2	38.5	46.8

unit : cm <sup>3</sup>			
ARR/HRR/LRR (roller chain type)			
Size	standard (N)	long (L)	extra long (XL)
15	3.1	3.9	-
20	5.0	6.3	-
25	8.5	9.7	10.8
30	11.2	12.5	13.9
35	14.7	16.5	19.8
45	20.8	24.3	27.7
55	30.6	37.8	46

## Technical information

### Accuracy


The ARC/HRC/ERC, ARD/HRD/ERD, WRC linear guides provide 5 different grades of precision : N, H, P, SP, and UP. Engineers can choose different grades depending on the machine applications.

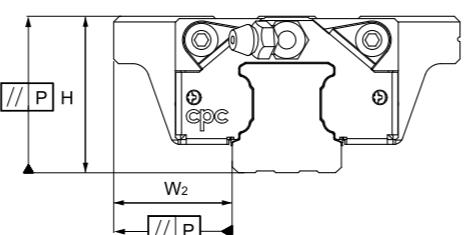

### Accuracy

Size	Accuracy grades ( $\mu\text{m}$ )		UP	SP	P	H	N
15 ~ 20	Tolerance of dimension height H	H	$\pm 5$	$\pm 10$	$\pm 15$	$\pm 30$	$\pm 70$
	Variation of height for different runner blocks on the same position of Rail	$\Delta H$	3	5	6	10	20
	Tolerance of dimension width $W_2$	$W_2$	$\pm 5$	$\pm 7$	$\pm 10$	$\pm 20$	$\pm 40$
	Variation of width for different runner blocks on the same position of Rail	$\Delta W_2$	3	5	7	15	30
25 ~ 35	Tolerance of dimension height H	H	$\pm 5$	$\pm 10$	$\pm 20$	$\pm 40$	$\pm 80$
	Variation of height for different runner blocks on the same position of Rail	$\Delta H$	3	5	7	15	20
	Tolerance of dimension width $W_2$	$W_2$	$\pm 5$	$\pm 7$	$\pm 10$	$\pm 20$	$\pm 40$
	Variation of width for different runner blocks on the same position of Rail	$\Delta W_2$	3	5	7	15	30
45 ~ 55	Tolerance of dimension height H	H	$\pm 5$	$\pm 10$	$\pm 20$	$\pm 40$	$\pm 80$
	Variation of height for different runner blocks on the same position of Rail	$\Delta H$	3	5	7	15	25
	Tolerance of dimension width $W_2$	$W_2$	$\pm 5$	$\pm 7$	$\pm 10$	$\pm 20$	$\pm 40$
	Variation of width for different runner blocks on the same position of Rail	$\Delta W_2$	3	5	7	15	30

### Runner block relative to linear guide, datum plane parallel motion precision

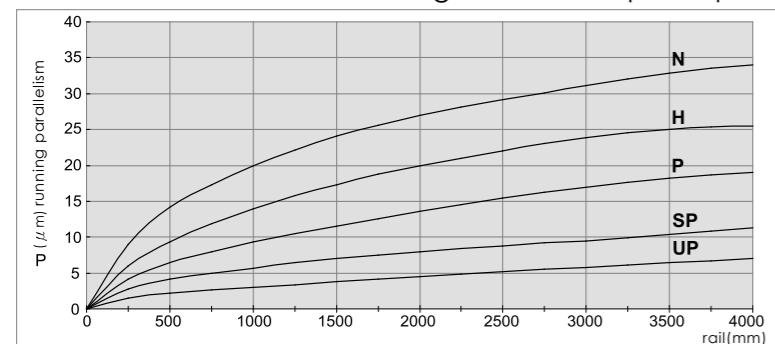


### Application

class	Movement, Conveyance	Manufacturing Equipment	High Precision Manufacturing Equipment	Measuring Equipment
N	●	●		
H	●	●	●	
P		●	●	●
SP			●	●
UP				●
Examples	1. Conveyance system 2. Industrial robots 3. Office Machinery	1. Woodworking machine 2. Punching press 3. Injection Molding machine	1. Lathe/milling machine/grinding machine 2. Electrical discharge machining (EDM) 3. CNC machining center	1. Three dimensional measuring instrument 2. Detection mirror / head shaft 3. X-Y Table

## Ordering information

### Length of Rail

Butt-jointing is required when lengths exceed  $L_{max}$ .  
(For more detailed information, please contact **cpc** for technical support.)

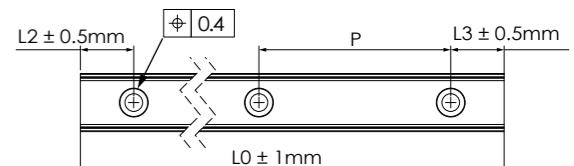

ARC	U	15	M	N	-R	B	2	Z	C	V1	P	-1480L	-20	-20	II	/J	Customization code
																	Number of rails on the same moving axis
																	End hole pitch (mm)*
																	Starting hole pitch (mm)*
																	Rail length (mm)
																	Accuracy grade : UP, SP, P, H, N
																	Preload class : VC, V0, V1, V2
																	C: with ball chain
																	Z: with lubrication storage pad
																	Block quantity
																	Seal type : B: Low friction S: Standard
																	R: six mounting holes Unlabeled: Standards
																	Block length : L: long N: standard S: short
																	Block width : M: standard F: flanged
																	Block type : 15, 20, 25, 30, 35, 45, 55
																	U: rail ( tapped from the bottom)
																	Product type : ARC: automation series HRC/ERC: heavy load series


### Customization code(The meaning of suffix characters)

J : slide rail connection	R : special process for rail	SG : installation of side grease holes and set screws
G : customer designated lubricant	VD : customized designated preload pressure value	PC : with plastic caps for counter holes on the rail
I : with Inspection report	OA : block install with grease nipple by <b>cpc</b> (Please contact <b>cpc</b> for direction of grease nipple installation)	MPC : with Metal-Plastic Caps for rail mounting holes.
S : special straightness requirements for rail	DE : reference edges of block and rail on opposite sides	TR : bolt-Hole without chamfer
B : special processing for block	SN : external NBR seal with metal scraper	RR : raydent coating treatment on the rail
BL : with extension and contraction support layer.	BR : black chrome coating treatment on the rail	RB : raydent coating treatment on the block
SN : external NBR seal with metal scraper	CB : clear chrome coating treatment on the block	RRB : raydent coating treatment on the block and rail
BR : black chrome coating treatment on the rail	CR : clear chrome coating treatment on the rail	NB : nickel coating treatment on the block
BB : black chrome coating treatment on the block	CRB : clear chrome coating treatment on the block and rail	
BRB : black chrome coating treatment on the block and rail	SB : with stainless steel ball bearings	
NRB : nickel coating treatment on the block and rail	NR : nickel coating treatment on the rail	

Note: For special process or customized requirement, please contact **cpc** for more information.

\* The end pitch of the rail should not exceed the 1/2 of original pitch, this is to avoid the misfit of the rail to the workbench.

## Dimensions Table

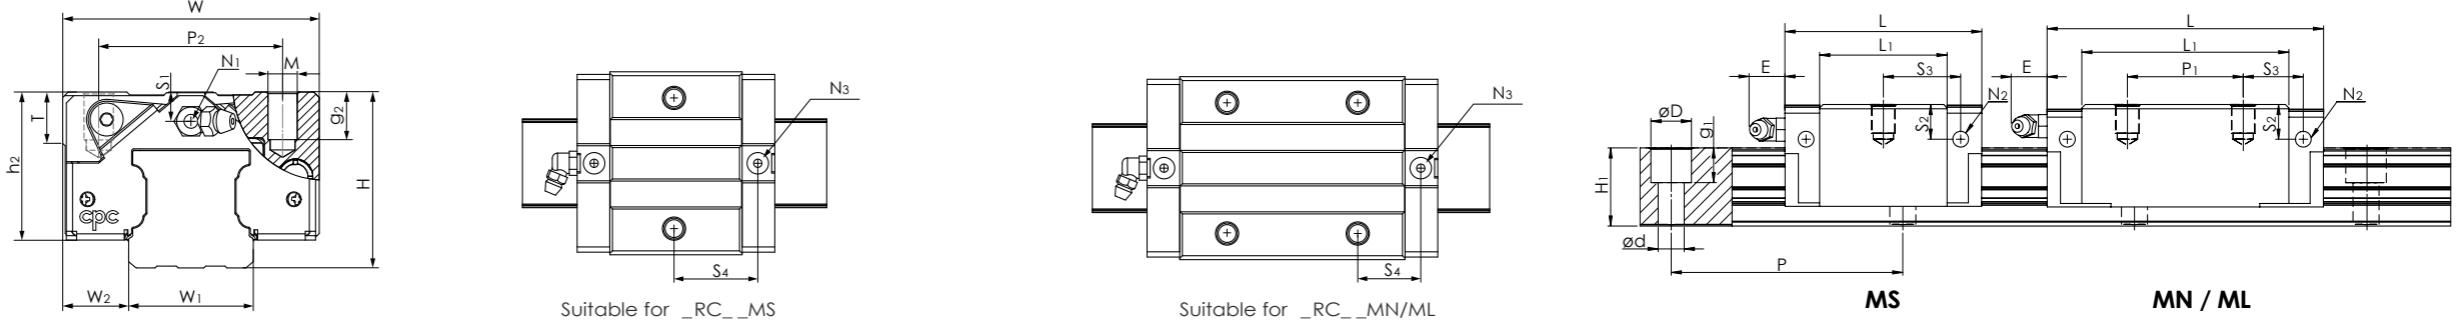

ARC/ERC MS, MN, ML Series

Model Code	Mounting Dimensions		Rail Dimensions(mm)					Block Dimensions(mm)								Block Dimensions(mm)						Load Capacities (kN)		Static Moment (Nm)			Weight		Model Code				
	H	W <sub>2</sub>	W <sub>1</sub> 0.05	H <sub>1</sub>	P	Dxdxg <sub>1</sub>	W	L	L <sub>1</sub>	h <sub>2</sub>	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>	M <sub>x</sub> g <sub>2</sub>	M <sub>1</sub>	T	N <sub>1</sub>	N <sub>2</sub>	N <sub>3</sub>	E	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>	C	C <sub>0</sub>	M <sub>ro</sub>	M <sub>po</sub>	M <sub>yo</sub>	Block (g)	Rail (g/m)		
ARC 15 MS								41.2	26		-												15.6	16.7	7.7	13.3	120	65	65	106		ARC 15 MS	
ARC 15 MN	24	9.5	15	15	60	7.5x4.5x5.3	34	55.5	40.3	20.7	26	26	-	M4x7	-	6	M3x6.5	M3x6	P3	5.3	4.5	7.5	9.8	10.9	9.9	19.2	175	145	145	158	1290	ARC 15 MN	
ARC 15 ML								76.2	61		34												16.1	17.2	13.4	29.5	280	330	330	240		ARC 15 ML	
ARC 20 MS								49.2	32.2		-												19.1	19.8	12.5	21.1	250	130	130	170		ARC 20 MS	
ARC 20 MN	28	11	20	20	60	9.5x6x8.5	42	69	52	23	32	32	-	M5x7	-	8	M3x7.5	M3x5.5	P4	10	4	7.4	13	13.7	17.1	32.8	400	320	320	266	2280	ARC 20 MN	
ARC 20 ML								87.2	70.2		45												15.6	16.3	20.4	42.2	530	550	550	330		ARC 20 ML	
ARC 25 MS	33	12.5	23	23	60	11x7x9	48	57.4	38.4	27	-												22.2	23.2	18.2	29.9	420	220	220	300		ARC 25 MS	
ARC 25 MN								81.2	62.2		35	35	-	M6x9	-	8	M6x7.5	M3x6.5	P4	12	5	9.3	16.6	17.6	24.8	46.6	675	540	540	420	3020	ARC 25 MN	
ERC 25 MS	36							57.4	38.4	30	-											8	12.3	22.2	23.2	18.2	29.9	420	220	220	315		ERC 25 MS
ARC 30 MS								68	44		-												27	26.7	23.3	36.2	700	345	345	560		ARC 30 MS	
ARC 30 MN	42	16	28	27	80	14x9x12	60	95.5	71.5	35.2	40	40	-	M8x12	-	12	M6x8.5	M6x5	P5	12	7.5	12	20.8	20.5	32.8	58.9	1050	780	780	800	4380	ARC 30 MN	
ARC 30 ML								118	94		60											21.7	21.7	39.6	77.0	1400	1330	1330	1138		ARC 30 ML		
ARC 35 MN	48	18	34	32	80	14x9x12	70	111.2	86.2	40.4	50	50	-	M8x13	-	14	M6x10	M6x7	P5	12	8	15	23.4	24.1	45.9	82.9	2030	1330	1330	1120	6790	ARC 35 MN	
ARC 35 ML								136.6	111.6		72											25.1	25.8	54.7	106.5	2650	1755	1755	1536		ARC 35 ML		
ARC 45 MN	60	20.5	45	39	105	20x14x17	86	135.5	102.5	50.7	60	60	-	M10x17	-	14	PT1/8x12.5	M6x10.5	P5	14	11.1	18.1	27.3	27.3	71.3	122.1	3550	2350	2350	2120	10530	ARC 45 MN	
ARC 45 ML								171.5	138.5		80											35.3	35.3	89.5	169.1	5100	4300	4300	3160		ARC 45 ML		
ARC 55 MN	70	23.5	53	45.7	120	24x16x20	100	168.5	126.5	58	75	75	-	M12x20	-	16	M6x10	M6x13	P5	12	13.5	23.5	34.8	33.8	108	186	6100	4400	4400	4200	14000	ARC 55 MN	
ARC 55 ML								202	160		95												41.5	40.5	125	226	7500	6650	6650	5083		ARC 55 ML	


1. The load capacities is for full-ball type (without ball chain)

2. N<sub>2</sub> = Injecting holes

3. N<sub>3</sub> = O-ring size for lubrication from above




4. N<sub>2</sub>, N<sub>3</sub> will be sealed before shipment, please open it when first using the product.

5. Please refer to the catalog P10 for the size of the screw hole of the reinforcement sheet

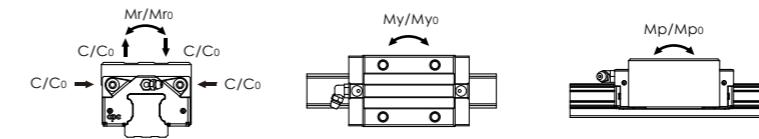

The above rating load capacities and static moments are calculated according to the ISO14728 standard. The rating life for basic dynamic load ratings is defined as the total 100km travel distance for 90% of a group of identical linear guides, under the same conditions and free from any material damage caused by rolling fatigue. If a standard of 50km travel distance is applied to measure the average product lifespan, the above basic dynamic load rating C should be multiplied by 1.26 for an accurate conversion.

## Dimensions Table

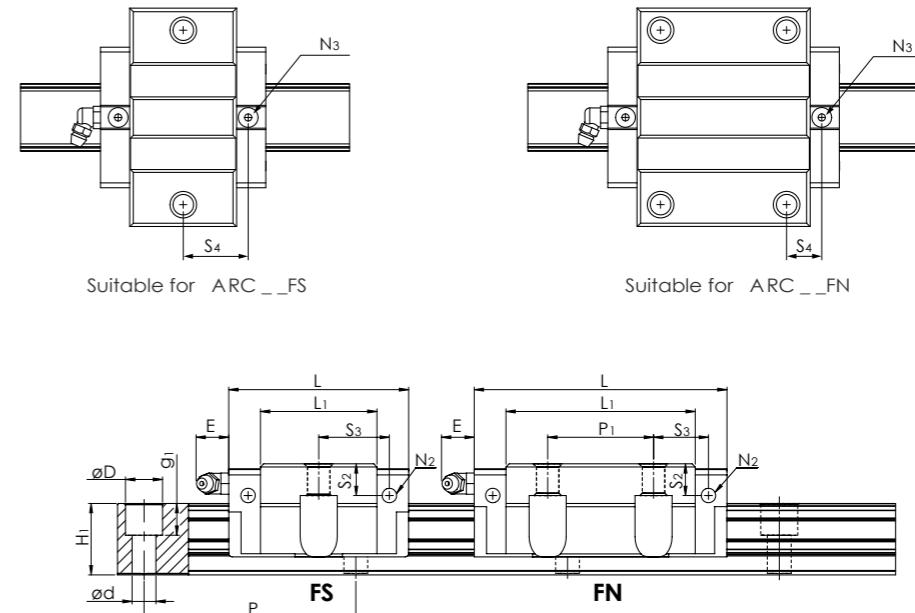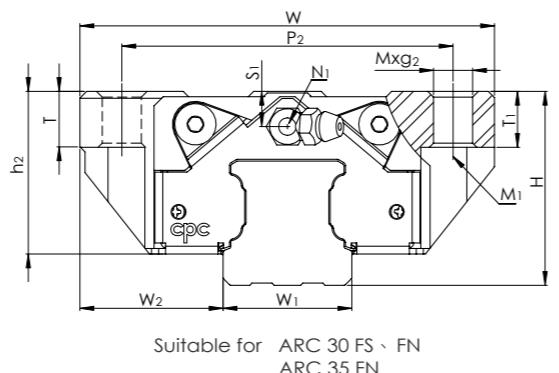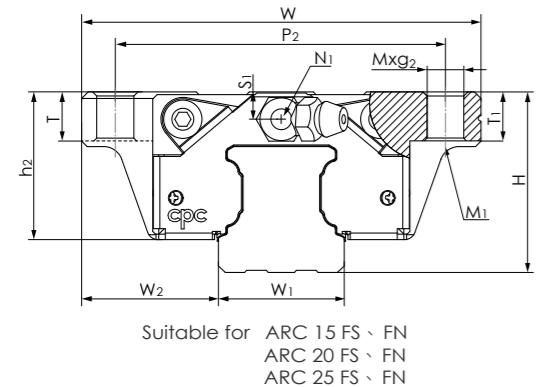

### ARC FS, FN Series

Model Code	Mounting Dimensions		Rail Dimensions(mm)					Block Dimensions(mm)										Block Dimensions(mm)							Load Capacities (kN)			Static Moment (Nm)			Weight		Model Code
	H	W <sub>2</sub>	W <sub>1</sub> 0.05	H <sub>1</sub>	P	D <sub>x</sub> D <sub>y</sub> G <sub>1</sub>	W	L	L <sub>1</sub>	h <sub>2</sub>	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>	M <sub>x</sub> G <sub>2</sub>	M <sub>1</sub>	T	T <sub>1</sub>	N <sub>1</sub>	N <sub>2</sub>	N <sub>3</sub>	E	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>	C	C <sub>0</sub>	M <sub>ro</sub>	M <sub>po</sub>	M <sub>yo</sub>	Block (g)	Rail (g/m)	
ARC 15 FS	24	18.5	15	15	60	7.5x4.5x5.3	52	41.2	26	-	41	-		M5x7	M4	7	7	M3x6.5	M3x6	P3	5.3	4.5	7.5	15.6	16.7	7.7	13.3	120	65	65	132	1290	ARC 15 FS
ARC 15 FN								55.5	40.3	20.7	26													9.8	10.9	9.9	19.2	175	145	145	200		ARC 15 FN
ARC 20 FS	28	19.5	20	20	60	9.5x6x8.5	59	49.2	32.2	-	49	-		M6x10	M5	10	10	M3x7.5	M3x5.5	P4	10	4	7.4	19.1	19.8	12.5	21.1	250	130	130	210	2280	ARC 20 FS
ARC 20 FN								69	52	23	32													13	13.7	17.1	32.8	400	320	320	336		ARC 20 FN
ARC 25 FS	33	25	23	23	60	11x7x9	73	57.4	38.4	-	60	-		M8x10	M6	12	10	M6x7.5	M3x6.5	P4	12	5	9.3	22.2	23.2	18.2	29.9	420	220	220	345	3020	ARC 25 FS
ARC 25 FN								81.2	62.2	27	35												16.6	17.6	24.8	46.6	675	540	540	524		ARC 25 FN	
ARC 30 FS	42	31	28	27	80	14x9x12	90	68	44	-	72	-		M10x12	M8	12	12	M6x8.5	M6x5	P5	12	7.5	12	27	26.8	23.3	36.2	700	345	345	750	4380	ARC 30 FS
ARC 30 FN								95.5	71.5	35.2	40												20.8	20.5	32.8	58.9	1050	780	780	1200		ARC 30 FN	
ARC 35 FS	48	33	34	32	80	14x9x12	100	76.7	51.7	-	82	-		M10x13	M8	13	13	M6x10	M6x7	P5	12	8	15	31.15	31.85	33.5	53.2	1250	525	525	1000	6790	ARC 35 FS
ARC 35 FN								111.2	86.2	40.4	50												23.4	24.1	45.9	82.9	1700	1080	1080	1580		ARC 35 FN	


1. The load capacities is for full-ball type (without ball chain)

2. N<sub>2</sub> = Injecting holes

3. N<sub>3</sub> = O-ring size for lubrication from above


4. N<sub>2</sub> N<sub>3</sub> will be sealed before shipment, please open it when first using the product.

5. Please refer to the catalog P10 for the size of the screw hole of the reinforcement sheet

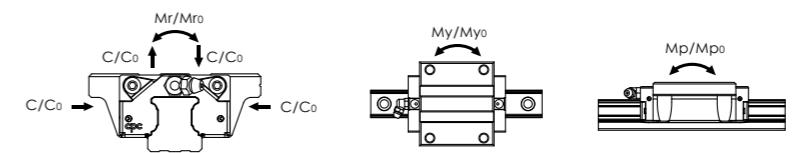

The above rating load capacities and static moments are calculated according to the ISO14728 standard. The rating life for basic dynamic load ratings is defined as the total 100km travel distance for 90% of a group of identical linear guides, under the same conditions and free from any material damage caused by rolling fatigue. If a standard of 50km travel distance is applied to measure the average product lifespan, the above basic dynamic load rating C should be multiplied by 1.26 for an accurate conversion.

## Dimensions Table

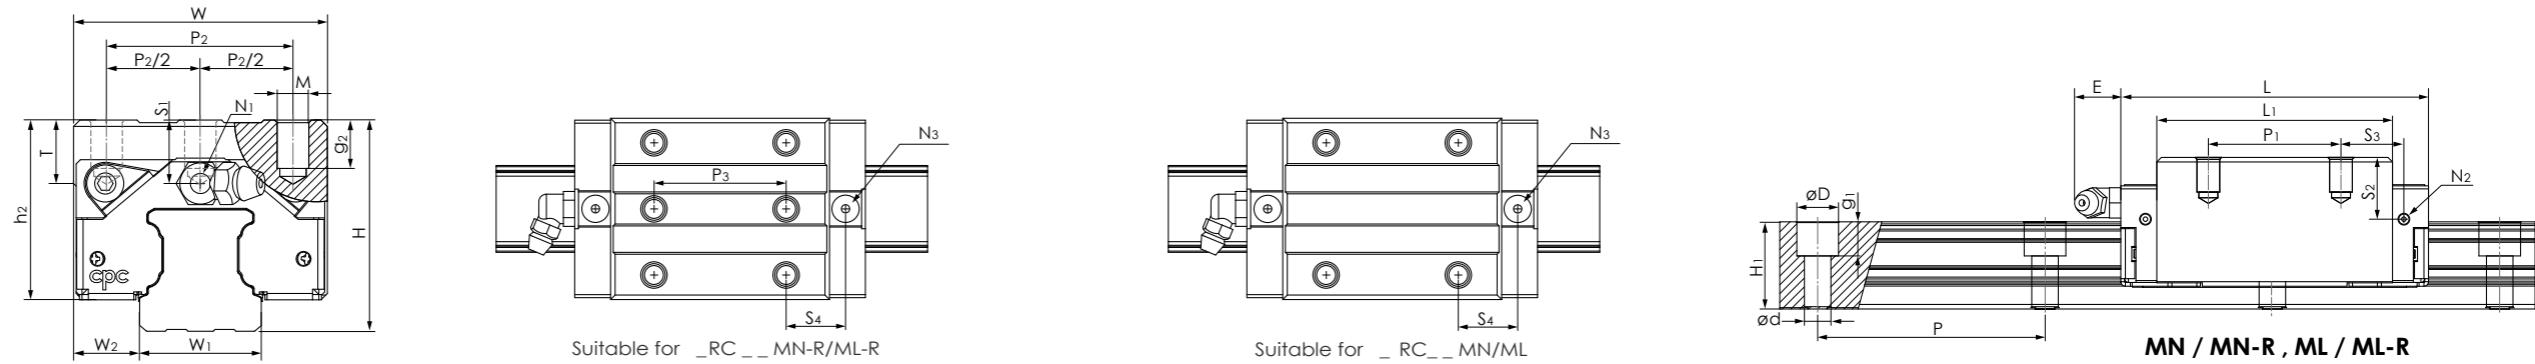

HRC/ERC MN, ML Series

Model Code	Mounting Dimensions		Rail Dimensions(mm)						Block Dimensions(mm)										Block Dimensions(mm)						Load Capacities (kN)		Static Moment (Nm)			Weight		Model Code				
	H	W <sub>2</sub>	W <sub>1</sub> 0.05	H <sub>1</sub>	P	D <sub>x</sub> D <sub>y</sub> g <sub>1</sub>	W	L	L <sub>1</sub>	h <sub>2</sub>	P <sub>1</sub>	P <sub>2</sub>	P <sub>2</sub> /2	P <sub>3</sub>	M <sub>x</sub> g <sub>2</sub>	M <sub>1</sub>	T	N <sub>1</sub>	N <sub>2</sub>	N <sub>3</sub>	E	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>	C	C <sub>0</sub>	M <sub>ro</sub>	M <sub>po</sub>	M <sub>yo</sub>	Block (g)	Rail (g/m)				
HRC 15 MN																																				HRC 15 MN
HRC 15 MN-R	28	9.5	15	15	60	7.5x4.5x5.3	34	55.5	40.3																									HRC 15 MN-R		
HRC 15 ML																																				HRC 15 ML
HRC 15 ML-R																																				HRC 15 ML-R
HRC 20 MN																																				HRC 20 MN
HRC 20 MN-R	30	12	20	20	60	9.5x6x8.5	44	69	52																										HRC 20 MN-R	
HRC 20 ML																																				HRC 20 ML
HRC 20 ML-R																																				HRC 20 ML-R
ERC 25 MN																																				ERC 25 MN
ERC 25 MN-R	36																																			ERC 25 MN-R
ERC 25 ML																																				ERC 25 ML
ERC 25 ML-R																																				ERC 25 ML-R
HRC 25 MN	12.5	23	23	60	11x7x9	48	81.2	62.2																											HRC 25 MN	
HRC 25 MN-R																																				HRC 25 MN-R
HRC 25 ML	40																																			HRC 25 ML
HRC 25 ML-R																																				HRC 25 ML-R
HRC 30 MN																																				HRC 30 MN
HRC 30 MN-R	45	16	28	27	80	14x9x12	60	95.5	71.5																										HRC 30 MN-R	
HRC 30 ML																																				HRC 30 ML
HRC 30 ML-R																																				HRC 30 ML-R
HRC 35 MN																																				HRC 35 MN
HRC 35 MN-R	55	18	34	32	80	14x9x12	70	111.2	86.2																										HRC 35 MN-R	
HRC 35 ML																																				HRC 35 ML
HRC 35 ML-R																																				HRC 35 ML-R
HRC 45 MN																																				HRC 45 MN
HRC 45 MN-R	70	20.5	45	39	105	20x14x17	86	135.5	102.5																									HRC 45 MN-R		
HRC 45 ML																																				HRC 45 ML
HRC 45 ML-R																																				HRC 45 ML-R
HRC 55 MN																																				HRC 55 MN
HRC 55 MN-R	80	23.5	53	45.7	120	24x16x20	100	168.5	126.5																									HRC 55 MN-R		
HRC 55 ML																																				HRC 55 ML
HRC 55 ML-R																																				HRC 55 ML-R


1. The load capacities is for full-ball type (without ball chain)

2. N<sub>2</sub> = Injecting holes




3. N<sub>3</sub> = O-ring size for lubrication from above

4. N<sub>2</sub>, N<sub>3</sub> will be sealed before shipment, please open it when first using the product.

5. Please refer to the catalog P10 for the size of the screw hole of the reinforcement sheet

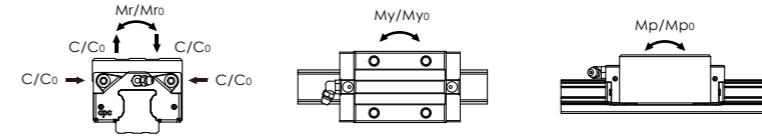

## Dimensions Table

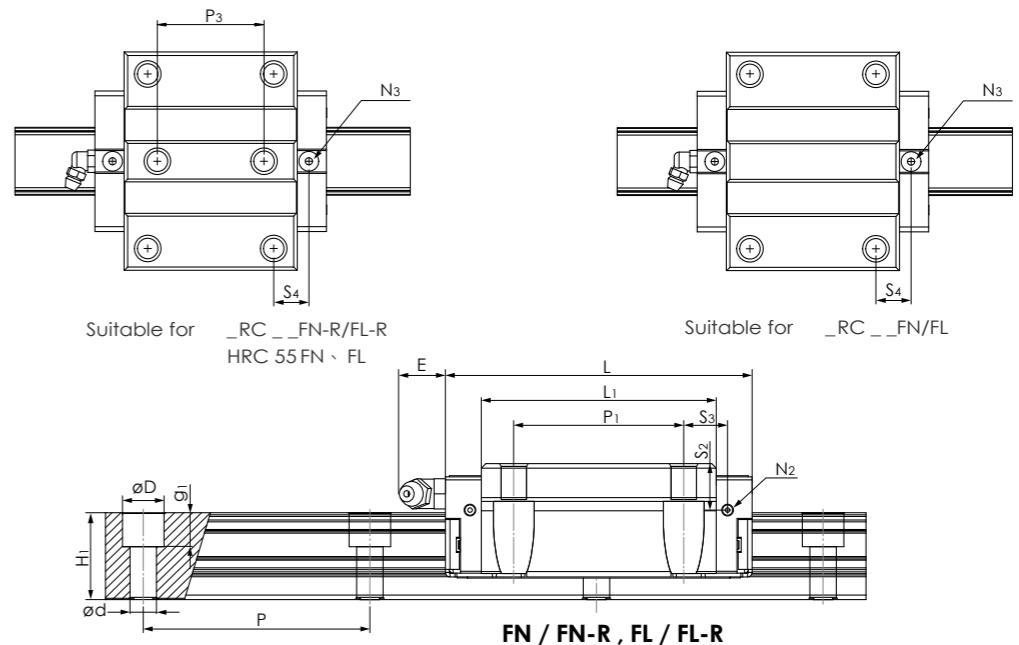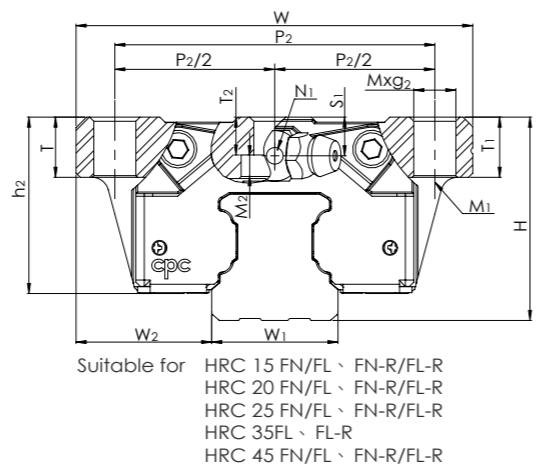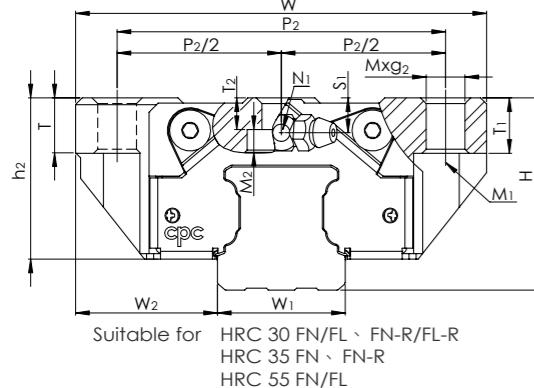

### HRC FN, FL Series

Model Code	Mounting Dimensions		Rail Dimensions(mm)					Block Dimensions(mm)										Block Dimensions(mm)								Load Capacities (kN)			Static Moment (Nm)			Weight		Model Code			
	H	W <sub>2</sub>	W <sub>1</sub> 0.05	H <sub>1</sub>	P	D <sub>x</sub> d <sub>x</sub> g <sub>1</sub>	W	L	L <sub>1</sub>	h <sub>2</sub>	P <sub>1</sub>	P <sub>2</sub>	P <sub>2</sub> /2	P <sub>3</sub>	M <sub>x</sub> g <sub>2</sub>	M <sub>1</sub>	M <sub>2</sub>	T	T <sub>1</sub>	T <sub>2</sub>	N <sub>1</sub>	N <sub>2</sub>	N <sub>3</sub>	E	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>	C	C <sub>0</sub>	M <sub>ro</sub>	M <sub>po</sub>	M <sub>yo</sub>	Block (g)	Rail (g/m)		
HRC 15 FN								55.5	40.3																										HRC 15 FN		
HRC 15 FN-R	24	16	15	15	60	7.5x4.5x5.3	47			20.7	30	38	19	26	M5x7	M4	2.8	7	7	4.4	M3x6.5	M3x6	P3	5.3	4.5	7.5		7.8	8.9	9.9	19.2	175	145	145	190	1290	HRC 15 FN-R
HRC 15 FL								76.2	61																										HRC 15 FL		
HRC 15 FL-R										19	26																								HRC 15 FL-R		
HRC 20 FN								69	52																										HRC 20 FN		
HRC 20 FN-R	30	21.5	20	20	60	9.5x6x8.5	63			25	40	53	26.5	35	M6x10	M5	3.5	10	10	4.4	M3x7.5	M3x5.5	P4	10	6	9.4		9	9.7	17.1	32.8	400	320	320	396	2280	HRC 20 FN-R
HRC 20 FL								87.2	70.2																									HRC 20 FL			
HRC 20 FL-R										26.5	35																								HRC 20 FL-R		
HRC 25 FN								81.2	62.2																									HRC 25 FN			
HRC 25 FN-R	36	23.5	23	23	60	11x7x9	70			30	45	57	28.5	40	M8x10	M6	4	12	10	6.3	M6x7.5	M3x6.5	P4	12	8	12.3		11.6	12.6	24.8	46.6	675	540	540	626	3020	HRC 25 FN-R
HRC 25 FL								105	86																										HRC 25 FL		
HRC 25 FL-R										28.5	40																								HRC 25 FL-R		
HRC 30 FN								95.5	71.5																									HRC 30 FN			
HRC 30 FN-R	42	31	28	27	80	14x9x12	90			35.2	52	72	36	44	M10x12	M8	5	12	12	6.8	M6x8.5	M6x5	P5	12	7.5	12		14.8	14.5	32.8	58.9	1050	780	780	1110	4380	HRC 30 FN-R
HRC 30 FL								118	94																										HRC 30 FL		
HRC 30 FL-R										36	44																								HRC 30 FL-R		
HRC 35 FN								111.2	86.2																									HRC 35 FN			
HRC 35 FN-R	48	33	34	32	80	14x9x12	100			40.4	62	82	41	52	M10x13	M8	5	13	13	7.3	M6x10	M6x7	P5	12	8	15		17.4	18.1	45.9	82.9	2030	1330	1330	1550	6790	HRC 35 FN-R
HRC 35 FL								136.6	111.6																									HRC 35 FL			
HRC 35 FL-R										41	52																								HRC 35 FL-R		
HRC 45 FN								135.5	102.5																									HRC 45 FN			
HRC 45 FN-R	60	37.5	45	39	105	20x14x17	120			50.7	80	100	50	60	M12x15	M10	6	18	15	9.8	PT1/8x12.5	M6x10.5	P5	14	11.1	18.1		17.3	17.3	71.3	122.1	3550	2350	2350	2747	10530	HRC 45 FN-R
HRC 45 FL								171.5	138.5																									HRC 45 FL			
HRC 45 FL-R										50	60																								HRC 45 FL-R		
HRC 55 FN		70	43.5	53	45.7	120	24x16x20	140		168.5	126.5	58	95	116	M14x18	M12	13	18	18	9.4	M6x10	M6x13	P5	12	13.5	23.5		24.8	23.8	108	186	6100	4400	4400	5440	14000	HRC 55 FN
HRC 55 FL								202	160																										HRC 55 FL		

1. The load capacities is for full-ball type (without ball chain)

2. N<sub>2</sub> = Injecting holes

3. N<sub>3</sub> = O-ring size for lubrication from above


4. N<sub>2</sub>, N<sub>3</sub> will be sealed before shipment, please open it when first using the product.

5. M<sub>x</sub>g<sup>2</sup>, M<sub>1</sub>: Screw size according to ISO 4762-12.9

6. M<sub>2</sub> countersunk screw size according to DIN 7984-8.8

7. Please refer to the catalog P10 for the size of the screw hole of the reinforcement sheet

## Dimensions Table

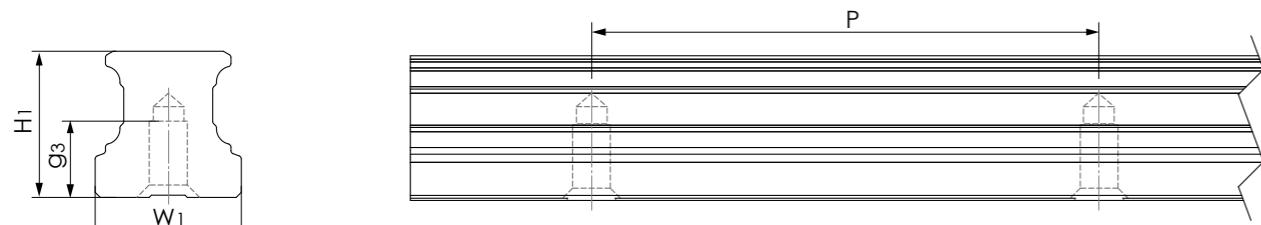

Rail (tapped from the bottom)

Model Code	W <sub>1</sub>	H <sub>1</sub>	P	M <sub>x</sub> g <sub>3</sub>	L <sub>max</sub>	Mass (g/m)
ARU 15	15	15	60	M5x8	4000	1290
ARU 20	20	20	60	M6x10	4000	2280
ARU 25	23	23	60	M6x12	4000	3020
ARU 30	28	27	80	M8x15	4000	4380
ARU 35	34	32	80	M8x15	4000	6790
ARU 45	45	39	105	M12x19	4000	10530
ARU 55	53	45.7	120	M14x24	4000	14060

## Nipple Option

Type			Nipple size		Grease nipple	Optional				
			Section	Side	Standard	Straight adapter	Tube diameter	L-Type adapter	Tube diameter	
Ball	ARC/ARD15	HRC/HRD15	-	M3	M3	A-M3	OA-M3-D4	-	OB-M3-M6	-
	ARC/ARD 20	HRC/HRD 20	-	M3	M3	B-M3	OA-M3-D4	-	OB-M3-M6	-
	ARC/ARD 25	HRC/HRD 25	ERC/ERD 25	M6	M3	A/B-M6	OA-M6-M8	Ø4	OB-M6-M8	Ø4
	ARC/ARD 30	HRC/HRD 30	-	M6	M6	A/B-M6	OA-M6-M8	Ø4	OB-M6-M8	Ø4
							OA-M6-PT1/8	-		
							OA-M6-G1/8	Ø6	OB-M6-PT1/8	-
							OA-M6-M8	Ø4	OB-M6-M8	Ø4
	ARC/ARD 35	HRC/HRD 35	-	M6	M6		OA-M6-PT1/8	-	OB-M6-M8	-
							OA-M6-G1/8	Ø6	OB-M6-PT1/8	-
	ARC/ARD 45	HRC/HRD 45	-	PT1/8	M6		OA-PT1/8-M8	Ø4	OB-PT1/8-M8	Ø4
Roller	ARR15	HRR15	-	M3	M3	A/B-M3	OA-M3-D4	-	OB-M3-M6	-
	ARR20	HRR20	-	M4	M4	A/B-M4	OA-M4-D4	-	OB-M4-M6	-
	ARR25	HRR25	-	M6	M6	A/B-M6	OA-M6-M8	Ø4	OB-M6-M8	Ø4
	ARR35	HRR35	LRR35	M6	M6	A/B-M6-L	OA-M6-M8-L	Ø4	OB-M6-M8-L	Ø4
							OA-M6-PT1/8-L	-		
							OA-M6-G1/8-L	Ø6	OB-M6-PT1/8-L	-
	ARR45	HRR45	LRR45	M6	M6		OA-M6-M8-L	Ø4	OB-M6-M8-L	Ø4
	ARR55	HRR55	LRR55	M6	M6		OA-M6-PT1/8-L	-		

\* When external NRB seal is chosen (SN), please use long type grease nipple for ball type product, extra long type grease nipple for roller type product.



## Ordering information

### Length of Rail



Butt-jointing is required when lengths exceed L<sub>max</sub>.  
(For more detailed information, please contact **cpc** for technical support.)

### Model code




WRC	U	21/15	M	N	B	2	Z	C	V1	P	-1480L	-20	-20	II	/J	Customization code (Please refer to page 32)
Number of rails on the same moving axis																
End hole pitch (mm)																
Starting hole pitch (mm)																
Rail length (mm)																
Accuracy grade : UP, SP, P, H, N (Please refer to page 31)																
Preload class : VC, V0, V1, V2 (Please refer to page 25)																
C: with ball chain (Please refer to page 07)																
Z: with lubrication storage pad (available: 21/15)																
Block quantity																
Seal type : B: Low friction S: Standard type S seal (available: 21/15)																
Block length : N: standard																
Block type : 21/15, 27/20																
U: rail (tapped from the bottom)																
Product type : WRC: Wide Rail Ball Type Linear Guide Series																

## Dimensions Table WRU Series




Model Code	W <sub>1</sub>	H <sub>1</sub>	P	P <sub>3</sub>	M <sub>x</sub> g <sub>3</sub>	L <sub>max</sub>	Mass (g/m)
WRU 21/15	37	14.4	50	22	M4x8	4000	3596
WRU 27/20	42	18.5	60	24	M5x7.5	4000	5259

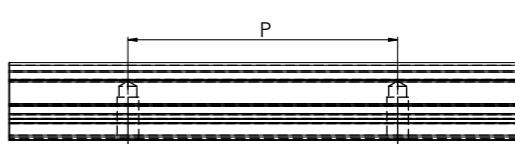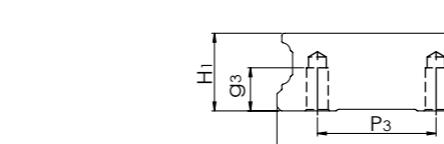

## Dimensions Table

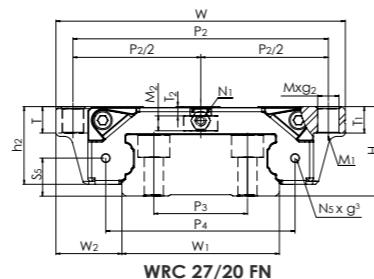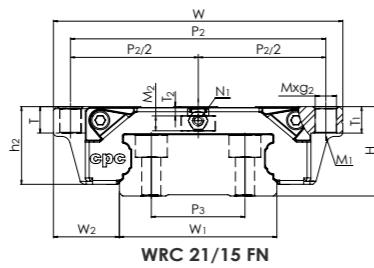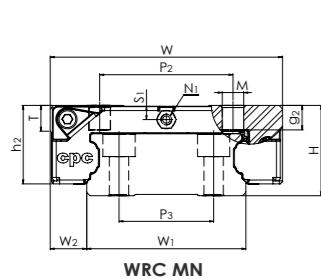

Type	Ns	g <sup>3</sup>
21/15	-	-
27/20	M3x0.35	2.5

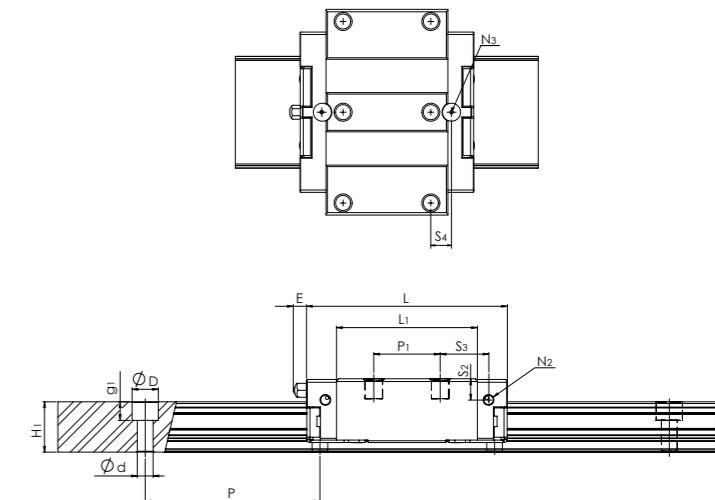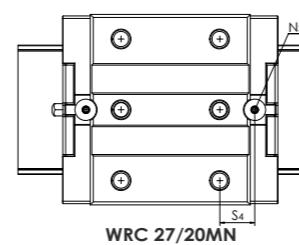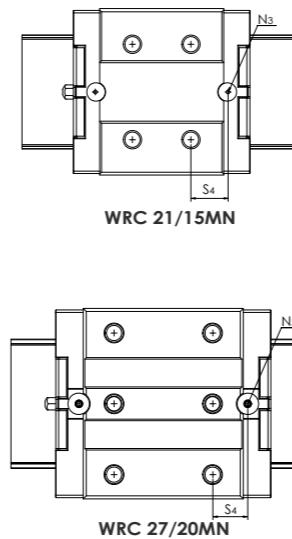

### WRC Series


Model Code	Mounting Dimensions		Rail Dimensions(mm)						Block Dimensions(mm)										Block Dimensions(mm)								Load Capacities (kN)		Static Moment (Nm)		Weight		Model Code						
	H	W <sub>2</sub>	W <sub>1</sub> -0.05	H <sub>1</sub>	P	P <sub>3</sub>	D <sub>x</sub> D <sub>x</sub> g <sub>1</sub>	W	L	L <sub>1</sub>	h <sub>2</sub>	P <sub>1</sub>	P <sub>2</sub>	P <sub>2</sub> /2	P <sub>4</sub>	M <sub>x</sub> g <sub>2</sub>	M <sub>1</sub>	M <sub>2</sub>	T	T <sub>1</sub>	T <sub>2</sub>	N <sub>1</sub>	N <sub>2</sub>	N <sub>3</sub>	E	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>	S <sub>5</sub>	C <sub>iso</sub> 100km	C <sub>iso</sub> 50km	C <sub>0</sub>	M <sub>ro</sub>	M <sub>po</sub>	M <sub>yo</sub>	Block(g)	Rail(g/m)	
WRC 21/15 MN	21	8.5 15.5	37	14.4	50	22	7.5x4.5x5.3	54 68	57.5	40.3	18.3	19	31	-	-	M5x5	-	-	6	-	-	M3	M3x3	P3	5.3	3.3	6.1	13.9 8.9	11.9 6.9	-	9.9	12.5	17.5	315	105	105	160 198	3596	WRC 21/15 MN
WRC 21/15 FN									29	60	30			-	-	M5x7	M4	2.1	7	7	3.6														WRC 21/15 FN				
WRC 27/20 MN	27	10 19	42	18.5	60	24	7.5x4.5x5.3	62 80	70	52	23.5	32	46	23	50	M6x6	-	-	10	-	-	M3	M3x4	P4	5.3	4.5	8	13.2 9.2	11.5 7.5	11	17.1	21.5	30	634	230	230	320 553	5259	WRC 27/20 MN
WRC 27/20 FN									40	70	35					M6x9	M5	4.6	9	9	3															WRC 27/20 FN			

The above rating load capacities and static moments are calculated according to the ISO14728 standard. The rating life for basic dynamic load ratings is defined as the total 100km travel distance for 90% of a group of identical linear guides under the same conditions and free from any material damage caused by rolling fatigue. If a standard of 50km travel distance is applied to measure the average product lifespan, the above basic dynamic load rating C should be multiplied by 1.26 for an accurate conversion.

### WRC...C Series Ball chain type

Model Code	Mounting Dimensions		Rail Dimensions(mm)						Block Dimensions(mm)										Block Dimensions(mm)								Load Capacities (kN)		Static Moment (Nm)		Weight		Model Code						
	H	W <sub>2</sub>	W <sub>1</sub> -0.05	H <sub>1</sub>	P	P <sub>3</sub>	D <sub>x</sub> D <sub>x</sub> g <sub>1</sub>	W	L	L <sub>1</sub>	h <sub>2</sub>	P <sub>1</sub>	P <sub>2</sub>	P <sub>2</sub> /2	P <sub>4</sub>	M <sub>x</sub> g <sub>2</sub>	M <sub>1</sub>	M <sub>2</sub>	T	T <sub>1</sub>	T <sub>2</sub>	N <sub>1</sub>	N <sub>2</sub>	N <sub>3</sub>	E	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>	S <sub>5</sub>	C <sub>cage</sub> 100km	C <sub>cage</sub> 50km	C <sub>0</sub>	M <sub>ro</sub>	M <sub>po</sub>	M <sub>yo</sub>	Block(g)	Rail(g/m)	
WRC 21/15 MN...C	21	8.5 15.5	37	14.4	50	22	7.5x4.5x5.3	54 68	57.5	40.3	18.3	19	31	-	-	M5x5	-	-	6	-	-	M3	M3x3	P3	5.3	3.3	6.1	13.9 8.9	11.9 6.9	-	11.8	14.9	16.2	295	95	95	160 198	3596	WRC 21/15 MN...C
WRC 21/15 FN...C									29	60	30			-	-	M5x7	M4	2.1	7	7	3.6														WRC 21/15 FN...C				
WRC 27/20 MN...C	27	10 19	42	18.5	60	24	7.5x4.5x5.3	62 80	70	52	23.5	32	46	23	50	M6x6	-	-	10	-	-	M3	M3x4	P4	5.3	4.5	8	13.2 9.2	11.5 7.5	11	22.3	28.1	25.7	535	200	200	320 553	5259	WRC 27/20 MN...C
WRC 27/20 FN...C									40	70	35					M6x9	M5	4.6	9	9	3															WRC 27/20 FN...C			

The dynamic load rating value with ball chain C<sub>cage</sub> is the measured value (please refer to page 08). The above static load rating and the static moment are calculated according to the ISO 14728 standard.

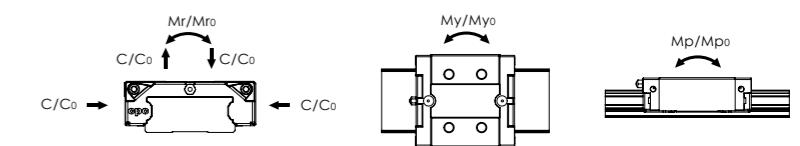


# ARD/HRD/ERD series

Standard 4-Row Ball Bearing Linear Guide Equipped with Cover Strip

## Product features


- Equipped with cover strip
- High dustproof effectiveness
- Easy installation
- Available in all sizes: 15-55
- Length of the cover strip will be the same as the guide rail
- Fixed device provided on both ends
- Under normal use, the metal cover can be installed and removed repeatedly

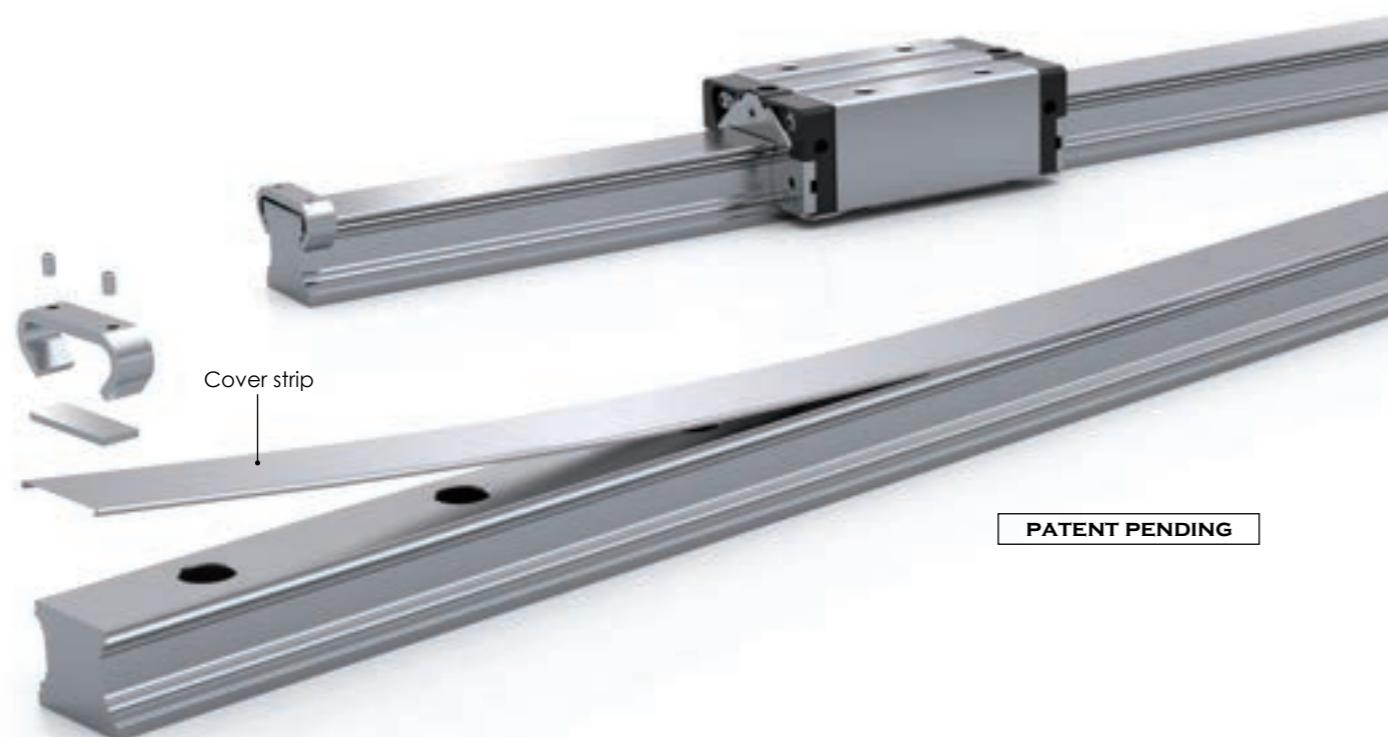

## Installation


### STEP 1.

Mounting the rail against the reference edge and tighten the screws; measuring the accuracy within the tolerance to ensure a correct mounting process.

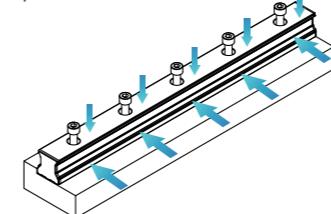


### STEP 2.

1. Put the cover strip on one side of the rail.
2. Press down the cover strip on the other side to make it fit the rail.

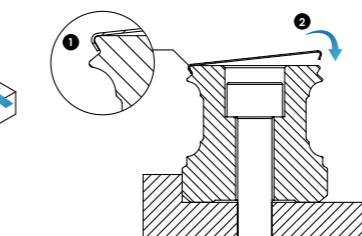


### STEP 3.

The gap at both ends better to be the same.

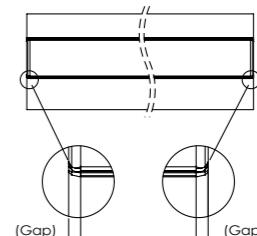


### STEP 4.

1. Place the press plate on the cover strip.
2. Slide the metal stopper over the plate.
3. Tighten the screws slightly; the press plate is to the cover strip, the rounded surface is attached to the cover strip. Add some lubricating oil. Moving the stopper set forward to the other end by pushing the rigid block, thereafter fix on the rail top surface tightly.
4. Tighten the screws to fix the stopper on one end of the cover strip.

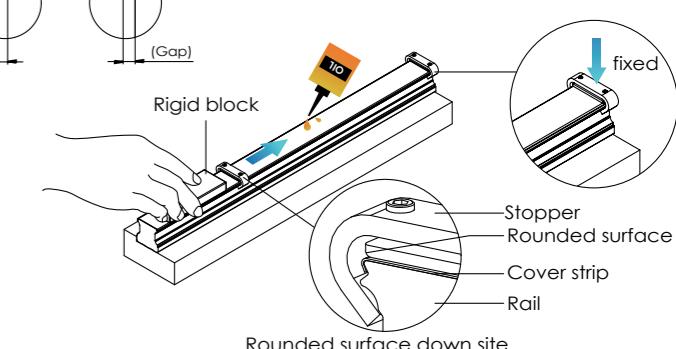


### STEP 5.

Mounting the block onto the rail.  
"Attention the reference side on the right side."

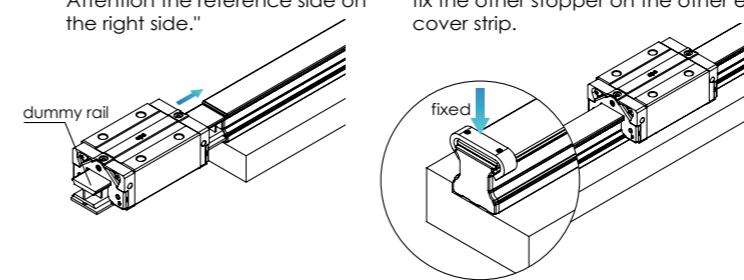

### STEP 6.

After the block and the rail are assembled, fix the other stopper on the other end of the cover strip.

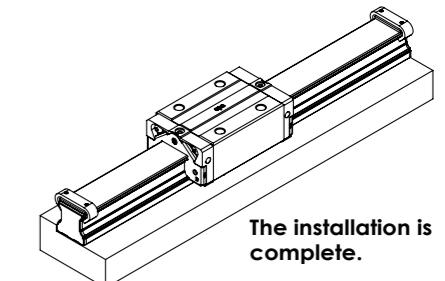


## Ordering information

### Model code

ARD	15	M	N	-R	S	2	Z	C	V1	P	-1480L	-20	-20	II	/J	Customization code
																Number of rails on the same moving axis
																End hole pitch (mm)
																Starting hole pitch (mm)
																Rail length (mm)
																Accuracy grade : UP, SP, P, H, N
																Preload class : VC, V0, V1, V2
																C: with ball chain (Available for size 15,20,25,30,35 and 45)
																Z: with lubrication storage pad (Available for size 15,20,25,30,35 and 45)
																Block quantity
																Seal type : S: Standard
																R: six mounting holes    Unlabeled: Standards
																Block length : L: long    N: standard    S: short
																Block width : M: standard    F: flanged
																Block type : 15, 20, 25, 30, 35, 45, 55
																Product type : ARC/ARD: automation series    HRC/ERC/HRD/ERD: heavy load series

## Dimensions Table

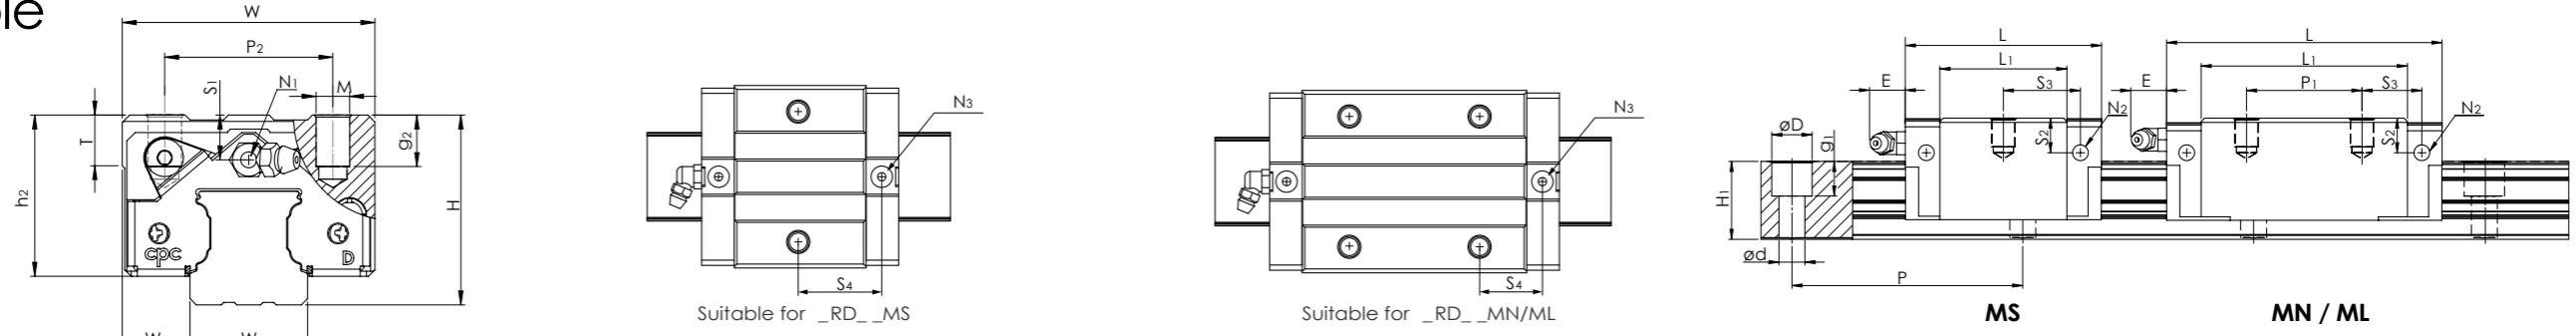

ARD/ERD MS, MN, ML Series

Model Code	Mounting Dimensions		Rail Dimensions(mm)					Block Dimensions(mm)								Block Dimensions(mm)						Load Capacities (kN)		Static Moment (Nm)			Weight		Model Code				
	H	W <sub>2</sub>	W <sub>1</sub> -0.05	H <sub>1</sub>	P	Dxdxg <sub>1</sub>	W	L	L <sub>1</sub>	h <sub>2</sub>	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>	M <sub>x</sub> g <sub>2</sub>	M <sub>1</sub>	T	N <sub>1</sub>	N <sub>2</sub>	N <sub>3</sub>	E	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>	C	C <sub>0</sub>	M <sub>ro</sub>	M <sub>po</sub>	M <sub>yo</sub>	Block (g)	Rail (g/m)		
ARD 15 MS								41.2	26		-												15.6	16.7	7.7	13.3	120	65	65	106		ARD 15 MS	
ARD 15 MN	24	9.5	15	15.15	60	7.5x4.5x5.3	34	55.5	40.3	20.7	26	26	-	M4x7	-	6	M3x6.5	M3x6	P3	5.3	4.5	7.5	9.8	10.9	9.9	19.2	175	145	145	158	1290	ARD 15 MN	
ARD 15 ML								76.2	61		34												16.1	17.2	13.4	29.5	280	330	330	240		ARD 15 ML	
ARD 20 MS								49.2	32.2		-												19.1	19.8	12.5	21.1	250	130	130	170		ARD 20 MS	
ARD 20 MN	28	11	20	20.2	60	9.5x6x8.5	42	69	52	23	32	32	-	M5x7	-	8	M3x7.5	M3x5.5	P4	10	4	7.4	13	13.7	17.1	32.8	400	320	320	266	2280	ARD 20 MN	
ARD 20 ML								87.2	70.2		45												15.6	16.3	20.4	42.2	530	550	550	330		ARD 20 ML	
ARD 25 MS	33	12.5	23	23.2	60	11x7x9	48	57.4	38.4	27	-												22.2	23.2	18.2	29.9	420	220	220	300		ARD 25 MS	
ARD 25 MN								81.2	62.2		35	35	-	M6x9	-		M6x7.5	M3x6.5	P4	12	5	9.3	16.6	17.6	24.8	46.6	675	540	540	420	3020	ARD 25 MN	
ERD 25 MS	36							57.4	38.4	30	-											8	12.3	22.2	23.2	18.2	29.9	420	220	220	315		ERD 25 MS
ARD 30 MS								68	44		-												27	26.7	23.3	36.2	700	345	345	560		ARD 30 MS	
ARD 30 MN	42	16	28	27.2	80	14x9x12	60	95.5	71.5	35.2	40	40	-	M8x12	-	12	M6x8.5	M6x5	P5	12	7.5	12	20.8	20.5	32.8	58.9	1050	780	780	800	4380	ARD 30 MN	
ARD 30 ML								118	94		60											21.7	21.7	39.6	77.0	1400	1330	1330	1138		ARD 30 ML		
ARD 35 MN	48	18	34	32.3	80	14x9x12	70	111.2	86.2	40.4	50	50	-	M8x13	-	14	M6x10	M6x7	P5	12	8	15	23.4	24.1	45.9	82.9	2030	1330	1330	1120	6790	ARD 35 MN	
ARD 35 ML								136.6	111.6		72											25.1	25.8	54.7	106.5	2650	1755	1755	1536		ARD 35 ML		
ARD 45 MN	60	20.5	45	39.3	105	20x14x17	86	135.5	102.5	50.7	60	60	-	M10x17	-	14	PT1/8x12.5	M6x10.5	P5	14	11.1	18.1	27.3	27.3	71.3	122.1	3550	2350	2350	2120	10530	ARD 45 MN	
ARD 45 ML								171.5	138.5		80											35.3	35.3	89.5	169.1	5100	4300	4300	3160		ARD 45 ML		
ARD 55 MN	70	23.5	53	46	120	24x16x20	100	168.5	126.5	58	75	75	-	M12x20	-	16	M6x10	M6x13	P5	12	13.5	23.5	34.8	33.8	108	186	6100	4400	4400	4200	14000	ARD 55 MN	
ARD 55 ML								202	160		95												41.5	40.5	125	226	7500	6650	6650	5083		ARD 55 ML	

1. The load capacities is for full-ball type (without ball chain)

2. N<sub>2</sub> = Injecting holes


3. N<sub>3</sub> = O-ring size for lubrication from above

4. N<sub>2</sub>, N<sub>3</sub> will be sealed before shipment, please open it when first using the product.






5. Please refer to the catalog P10 for the size of the screw hole of the reinforcement sheet

6. ARD series rail height including cover strip (H<sub>1</sub>)

The above rating load capacities and static moments are calculated according to the ISO14728 standard. The rating life for basic dynamic load ratings is defined as the total 100km travel distance for 90% of a group of identical linear guides, under the same conditions and free from any material damage caused by rolling fatigue. If a standard of 50km travel distance is applied to measure the average product lifespan, the above basic dynamic load rating C should be multiplied by 1.26 for an accurate conversion.

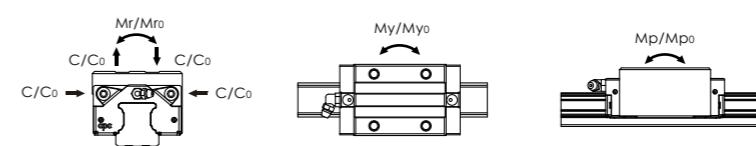

## Dimensions Table

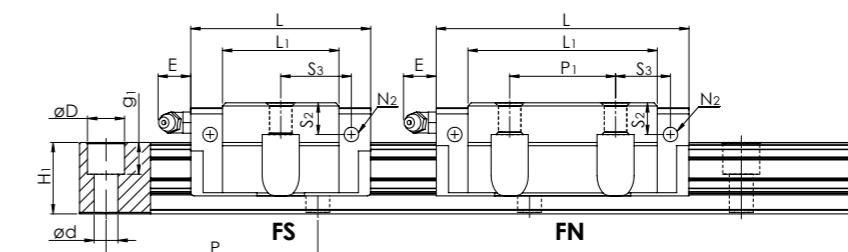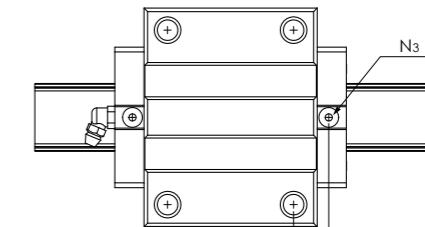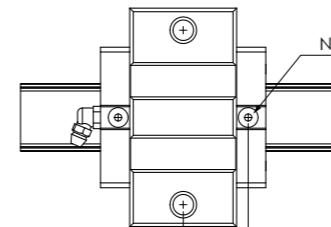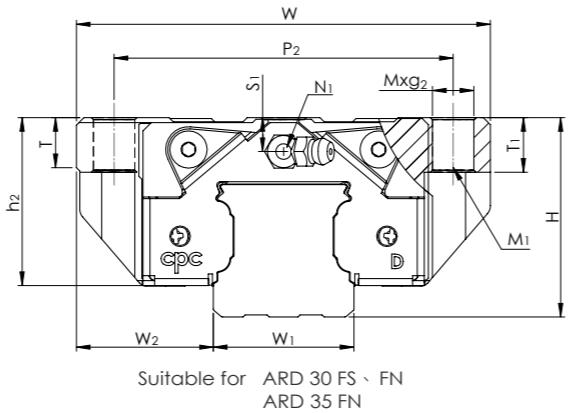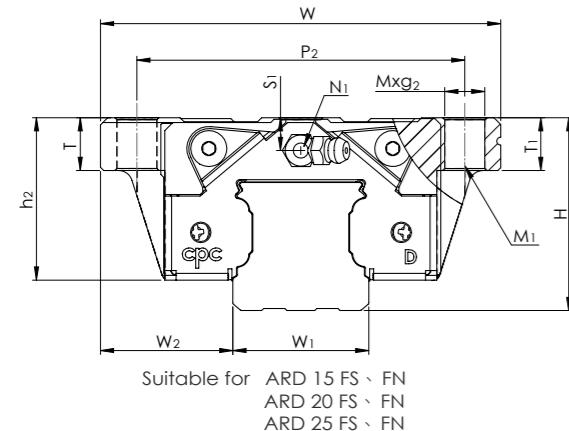

### ARD FS, FN Series

Model Code	Mounting Dimensions		Rail Dimensions(mm)					Block Dimensions(mm)										Block Dimensions(mm)							Load Capacities (kN)			Static Moment (Nm)			Weight		Model Code
	H	W <sub>2</sub>	W <sub>1</sub> 0.05	H <sub>1</sub>	P	Dxdxg <sub>1</sub>	W	L	L <sub>1</sub>	h <sub>2</sub>	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>	Mxg <sub>2</sub>	M <sub>1</sub>	T	T <sub>1</sub>	N <sub>i</sub>	N <sub>2</sub>	N <sub>3</sub>	E	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>	C	C <sub>0</sub>	M <sub>ro</sub>	M <sub>po</sub>	M <sub>yo</sub>	Block (g)	Rail (g/m)	
ARD 15 FS	24	18.5	15	15	60	7.5x4.5x5.3	52	41.2	26	-	41	-		M5x7	M4	7	7	M3x6.5	M3x6	P3	5.3	4.5	7.5	15.6	16.7	7.7	13.3	120	65	65	132	ARD 15 FS	
ARD 15 FN								55.5	40.3	20.7	26														9.8	10.9	9.9	19.2	175	145	145	200	ARD 15 FN
ARD 20 FS	28	19.5	20	20	60	9.5x6x8.5	59	49.2	32.2	-	49	-		M6x10	M5	10	10	M3x7.5	M3x5.5	P4	10	4	7.4	19.1	19.8	12.5	21.1	250	130	130	210	ARD 20 FS	
ARD 20 FN								69	52	23	32														13	13.7	17.1	32.8	400	320	320	336	ARD 20 FN
ARD 25 FS	33	25	23	23	60	11x7x9	73	57.4	38.4	-	60	-		M8x10	M6	12	10	M6x7.5	M3x6.5	P4	12	5	9.3	22.2	23.2	18.2	29.9	420	220	220	345	ARD 25 FS	
ARD 25 FN								81.2	62.2	27	35													16.6	17.6	24.8	46.6	675	540	540	524	ARD 25 FN	
ARD 30 FS	42	31	28	27	80	14x9x12	90	68	44	-	72	-		M10x12	M8	12	12	M6x8.5	M6x5	P5	12	7.5	12	27	26.8	23.3	36.2	700	345	345	750	ARD 30 FS	
ARD 30 FN								95.5	71.5	35.2	40												20.8	20.5	32.8	58.9	1050	780	780	1200	ARD 30 FN		
ARD 35 FS	48	33	34	32	80	14x9x12	100	76.7	51.7	-	82	-		M10x13	M8	13	13	M6x10	M6x7	P5	12	8	15	31.15	31.85	33.5	53.2	1250	525	525	1000	ARD 35 FS	
ARD 35 FN								111.2	86.2	40.4	50												23.4	24.1	45.9	82.9	1700	1080	1080	1580	ARD 35 FN		


2. N<sub>2</sub> = Injecting holes

3. N<sub>3</sub> = O-ring size for lubrication from above

4. N<sub>2</sub>, N<sub>3</sub> will be sealed before shipment, please open it when first using the product.


5. Please refer to the catalog P10 for the size of the screw hole of the reinforcement sheet

6. ARD series rail height including cover strip (H)

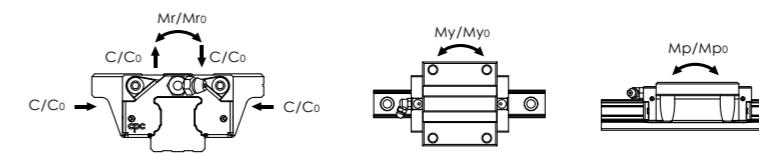

The above rating load capacities and static moments are calculated according to the ISO14728 standard. The rating life for basic dynamic load ratings is defined as the total 100km travel distance for 90% of a group of identical linear guides, under the same conditions and free from any material damage caused by rolling fatigue. If a standard of 50km travel distance is applied to measure the average product lifespan, the above basic dynamic load rating C should be multiplied by 1.26 for an accurate conversion.




## Dimensions Table

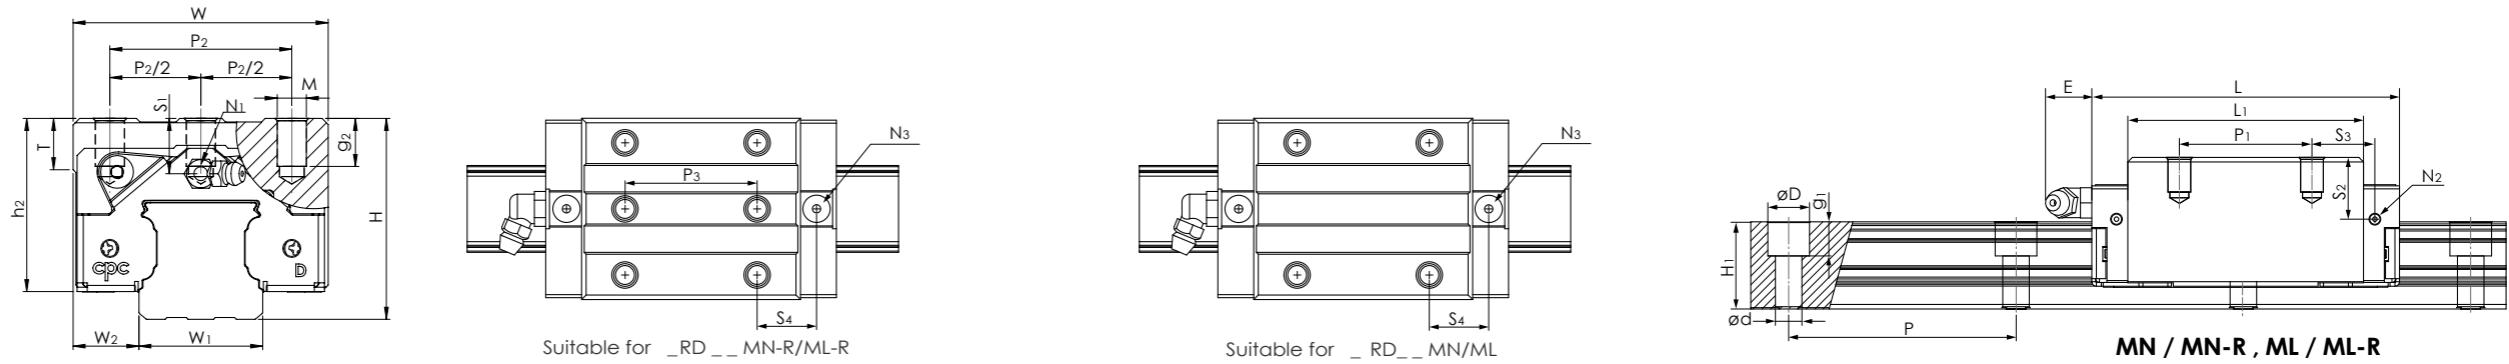

### HRD/ERD MN, ML Series

Model Code	Mounting Dimensions		Rail Dimensions(mm)					Block Dimensions(mm)									Block Dimensions(mm)							Load Capacities (kN)			Static Moment (Nm)			Weight		Model Code	
	H	W <sub>2</sub>	W <sub>1</sub> 0.05	H <sub>1</sub>	P	D <sub>x</sub> D <sub>y</sub> G <sub>1</sub>	W	L	L <sub>1</sub>	h <sub>2</sub>	P <sub>1</sub>	P <sub>2</sub>	P <sub>2</sub> /2	P <sub>3</sub>	M <sub>x</sub> G <sub>2</sub>	M <sub>1</sub>	T	N <sub>1</sub>	N <sub>2</sub>	N <sub>3</sub>	E	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>	C	C <sub>0</sub>	M <sub>ro</sub>	M <sub>po</sub>	M <sub>yo</sub>	Block (g)	Rail (g/m)	
HRD 15 MN	28	9.5	15	15.15	60	7.5x4.5x5.3	34	55.5	40.3	24.7	26	26	-	-	M4x7	-	6	M3x6.5	M3x6	P3	5.3	8.5	11.5	9.8	10.9	9.9	19.2	175	145	145	200	1290	HRD 15 MN
HRD 15 MN-R																															HRD 15 MN-R		
HRD 15 ML																														HRD 15 ML			
HRD 15 ML-R																														HRD 15 ML-R			
HRD 20 MN	30	12	20	20.2	60	9.5x6x8.5	44	69	52	25	36	32	-	-	M5x8.5	-	8	M3x7.5	M3x5.5	P4	10	6	9.4	11	11.7	17.1	32.8	400	320	320	318	2280	HRD 20 MN
HRD 20 MN-R																														HRD 20 MN-R			
HRD 20 ML																														HRD 20 ML			
HRD 20 ML-R																														HRD 20 ML-R			
ERD 25 MN	36	12.5	23	23.2	60	11x7x9	48	81.2	62.2	30	35	35	-	-	M6x9	-	8	M6x7.5	M3x6.5	P4	12	8	12.3	16.6	17.6	24.8	46.6	675	540	540	470	3020	ERD 25 MN
ERD 25 MN-R																														ERD 25 MN-R			
ERD 25 ML																														ERD 25 ML			
ERD 25 ML-R																														ERD 25 ML-R			
HRD 25 MN	40	12.5	23	23.2	60	11x7x9	48	81.2	62.2	34	35	35	-	-	M6x9	-	12	M6x7.5	M3x6.5	P4	12	12	16.3	16.6	17.6	24.8	46.6	675	540	540	578	3020	HRD 25 MN
HRD 25 MN-R																														HRD 25 MN-R			
HRD 25 ML																														HRD 25 ML			
HRD 25 ML-R																														HRD 25 ML-R			
HRD 30 MN	45	16	28	27.2	80	14x9x12	60	95.5	71.5	40	40	40	-	-	M8x12	-	12	M6x8.5	M6x5	P5	12	10.5	15	20.8	20.5	32.8	58.9	1050	780	780	896	4380	HRD 30 MN
HRD 30 MN-R																																	

## Dimensions Table

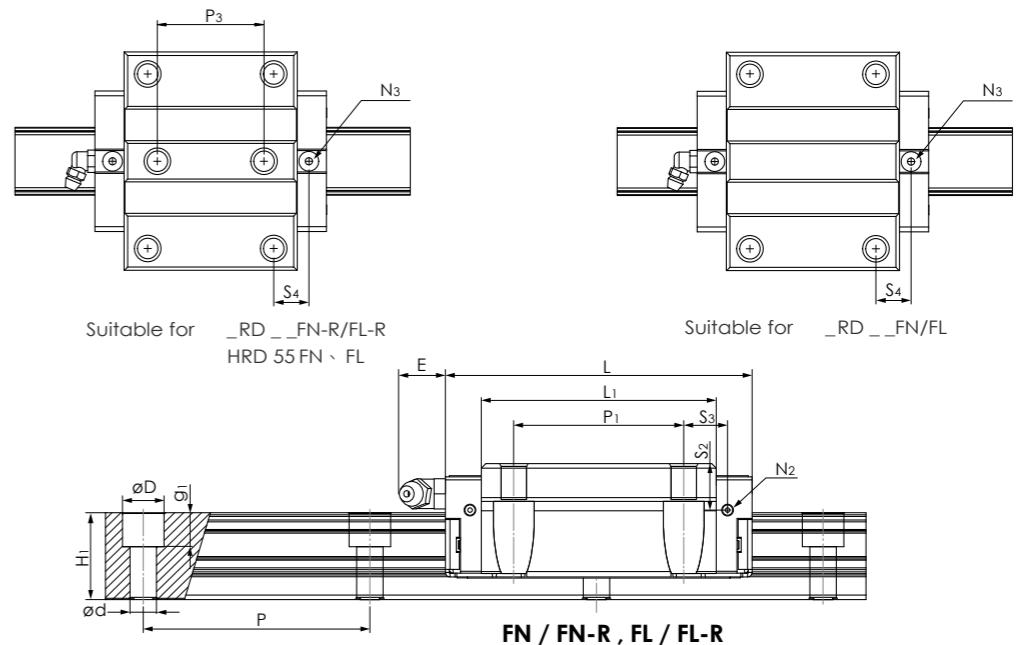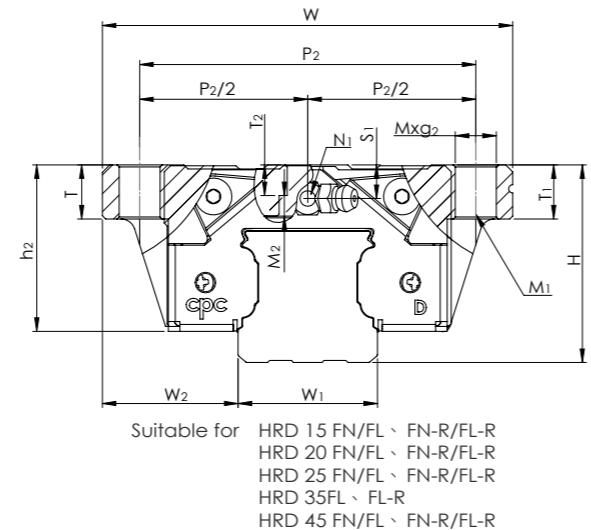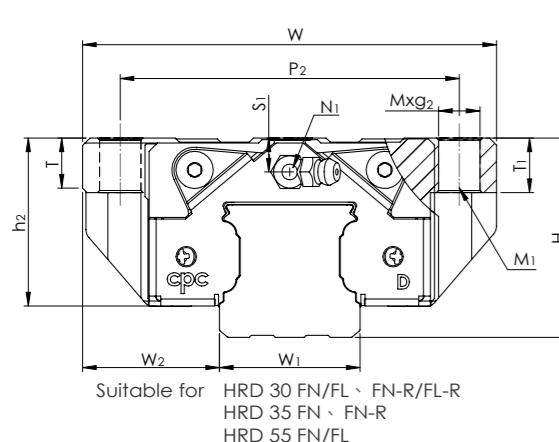

## HRD FN, ML Series


Model Code	Mounting Dimensions		Rail Dimensions(mm)					Block Dimensions(mm)										Block Dimensions(mm)								Load Capacities (kN)			Static Moment (Nm)			Weight		Model Code						
	H	W <sub>2</sub>	W <sub>1</sub> -0.05	H <sub>1</sub>	P	D <sub>x</sub> d <sub>x</sub> g <sub>1</sub>	W	L	L <sub>1</sub>	h <sub>2</sub>	P <sub>1</sub>	P <sub>2</sub>	P <sub>2</sub> /2	P <sub>3</sub>	M <sub>x</sub> g <sub>2</sub>	M <sub>1</sub>	M <sub>2</sub>	T	T <sub>1</sub>	T <sub>2</sub>	N <sub>1</sub>	N <sub>2</sub>	N <sub>3</sub>	E	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>	C	C <sub>0</sub>	M <sub>ro</sub>	M <sub>po</sub>	M <sub>yo</sub>	Block (g)	Rail (g/m)					
HRD 15 FN	24	16	15	15.15	60	7.5x4.5x5.3	47	55.5	40.3	20.7	30	38	19	26	M5x7	M4	2.8	7	7	4.4	M3x6.5	M3x6	P3	5.3	4.5	7.5	7.8	8.9	9.9	19.2	175	145	145	190	175	1290	HRD 15 FN	HRD 15 FN-R	HRD 15 FL	HRD 15 FL-R
HRD 15 FN-R																																								
HRD 15 FL																																								
HRD 15 FL-R																																								
HRD 20 FN	30	21.5	20	20.2	60	9.5x6x8.5	63	69	52	25	40	53	26.5	35	M6x10	M5	3.5	10	10	4.4	M3x7.5	M3x5.5	P4	10	6	9.4	9	9.7	17.1	32.8	400	320	320	396	375	2280	HRD 20 FN	HRD 20 FN-R	HRD 20 FL	HRD 20 FL-R
HRD 20 FN-R																																								
HRD 20 FL																																								
HRD 20 FL-R																																								
HRD 25 FN	36	23.5	23	23.2	60	11x7x9	70	81.2	62.2	30	45	57	28.5	40	M8x10	M6	4	12	10	6.3	M6x7.5	M3x6.5	P4	12	8	12.3	11.6	12.6	24.8	46.6	675	540	540	626	550	3020	HRD 25 FN	HRD 25 FN-R	HRD 25 FL	HRD 25 FL-R
HRD 25 FN-R																																								
HRD 25 FL																																								
HRD 25 FL-R																																								
HRD 30 FN	42	31	28	27.2	80	14x9x12	90	95.5	71.5	35.2	52	72	36	44	M10x12	M8	5	12	12	6.8	M6x8.5	M6x5	P5	12	7.5	12	14.8	14.5	32.8	58.9	1050	780	780	1110						

## ARR/HRR/LRR Roller Guides Series

### Product features

- ARR low profile model and HRR standard profile model (Block types: MN/ML/FN/FL ) are exactly the same installation dimensions as the other brands.
- The optimized design of the contact surface between the roller and the raceway of the rail has Free-Edge Effect, which greatly improves the load capacity of the roller guide.
- The LRR model with a lower system height  
The LRR series with a lower system height, which allows a low center of gravity, offers a more compact height space with the same rated load and rated life.
- High load MXL super long Block model  
Compared with the ML model with a long block, MXL model presents a larger rated load and rigidity, and has better vibration absorption capacity.
- Patented silent roller chain (patented design)  
Effectively reduce the noise and bumps when the block moves, improve the running smoothness and increase the rated load capacity.
- Built-in oil storage design (patent design)  
The built-in oil storage ensures long-term lubrication, which is environmentally friendly and reduces maintenance costs.
- High-rigidity stainless steel reinforcement plate (patent design)  
It has a scraping function to maintain a small gap with the rail section to prevent metal chips from intruding. The L-shaped design. The bottom of the steel body is equipped with an integrated milling tenon, which is mutually embedded and powerfully covers the end cover to increase the running speed and acceleration.
- Fully covered sealing design  
The blocks of all models are equipped with covered seals, which can effectively prevent foreign matter and dust from invading the blocks and reduce the overflow of lubricating oil in the blocks.
- High precision  
The appropriate accuracy level can be selected according to different applications
- Metal cover strip (patent design)  
All types of slides are available for selection, and can prevent foreign matter from intruding in harsh environments and have a high dust-proof effect.
- Metal plastic cap (patent design)  
Patented design, easy installation, stainless steel upper cover can show excellent wear resistance and dust resistance in harsh environments.

### Roller Guide Structure

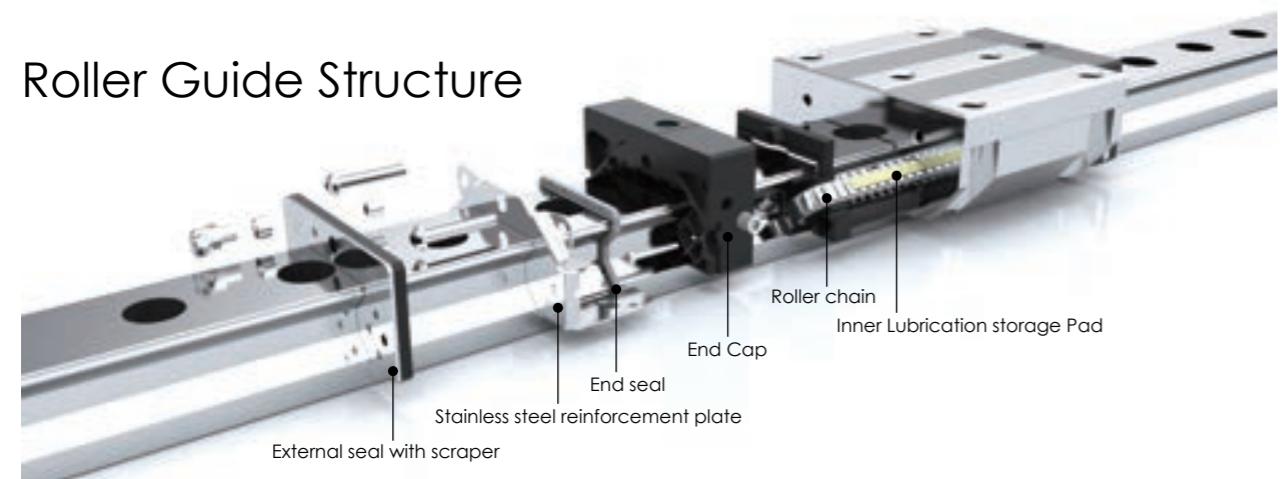

Travel speed : Reach Vmax 10 m/s

Acceleration : Reach  $\alpha_{max}$  450 m/s<sup>2</sup>

Precondition: preload must be present, even when operating under load.

### Types of the Roller Guide Block

#### ARR low profile Model



Normal type MN

Long type ML

#### HRR standard profile Model



Normal type MN

Long type ML

Super long type MXL



Flanged normal type FN

Flanged long type

Flanged super long type

#### LRR low system height Model



Normal type MN

Long type ML

Super long type MXL



Flanged normal type FN

Flanged long type


Flanged super long type

## Roller Guide design

### The LRR model with a lower system height


Compared with the other brands' standard, the model with a lower center of gravity is combined with a lower height can provide more compact height space, or for the applications that need to reduce external torque and smaller inertia force. ARR, HRR, and LRR blocks all share the same rail and have the same rated load and rated life.

Model specification				System height H
LRR	35	MN ML MXL	FN FL FXL	44
	45	MN ML MXL	FN FL FXL	52
	55	MN ML MXL	FN FL FXL	63

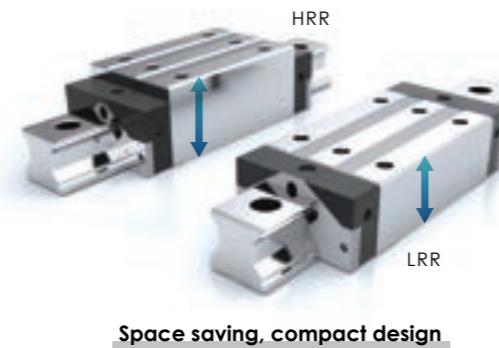

### MXL super long Block model

Compared with the other brands' ML extended slider, the longer-length super long block model can present greater rated load and rigidity, and has better vibration absorption. It is suitable for machine tools that require ultra-high rigidity and running accuracy.

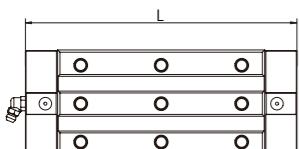

Model specification			Block length L
HRR	25	MXL	133.4
	35	FXL	177.5
	45		226
LRR	55	MXL	290.4
	35	FXL	177.5
	45	FXL	226
	55		290.4



High load, high rigidity, super long design

### Patented silent roller chain (option)


The roller chain can effectively reduce the high-frequency noise during the operation of the block and improve the running smoothness. The spacer in the roller chain between adjacent steel rollers can continuously replenish the oil film of the rollers to maintain better lubrication.



Improve the running smoothness, noise reduce design.

### Built-in lubrication storage design (patent design)

The built-in PU lubrication storage is embedded in the revolving channel at both ends and the inner pipe of the block, which does not increase the length of the block, but can directly contact the rollers in each row. And according to the operating environment, the block is immersed in the lubricant, and the lubricant can also be injected through the inject port, so that enough lubricant is stored in the PU lubrication storage. This ensures the long-term lubrication effect and comply with environmental protection and reduction Maintenance cost.

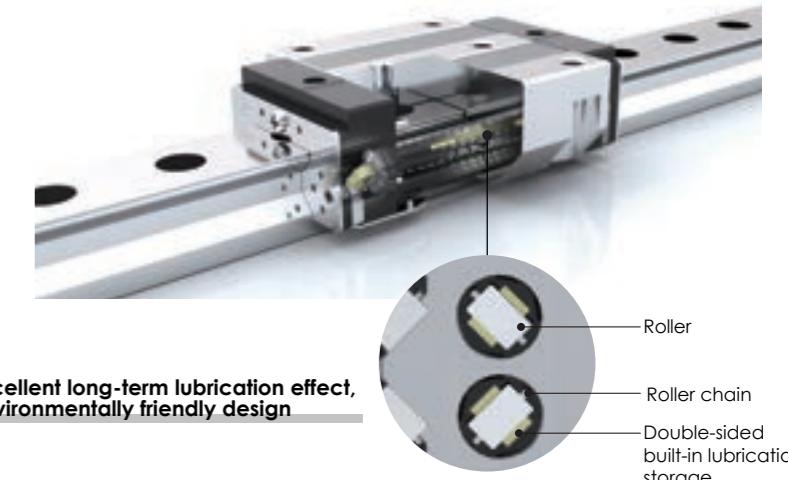

Excellent long-term lubrication effect, environmentally friendly design

### High-rigidity stainless steel reinforcement plate

The L-shaped design is fixed on the steel body of the block with screws on the end and bottom respectively; the bottom of the steel body is provided with an integrally formed milling tenon, which firmly locks the reinforcing sheet.

1. It can increase the strength of the plastic end cap and the ability to withstand high-speed operation, heavy load or harsh environment operation.
2. The gap between the reinforcement plate and the rail is 0.3mm max. It can completely obstruct the large foreign objects come into the block from the front side and protect the block from the damage of the metal chips.

### Design in general





High speed impact, harsh environment, uncoated end caps which can easily damage the rotating end or stretched end caps.



L-shaped high-rigidity protection design

### Fully covered sealing design

The block of all models are equipped with contact-type "end seals", "bottom seals" and "inner seals". It can effectively prevent foreign particals, dust and wood chips from invading the block, and reduce the overflow of lubricating oil in the block.

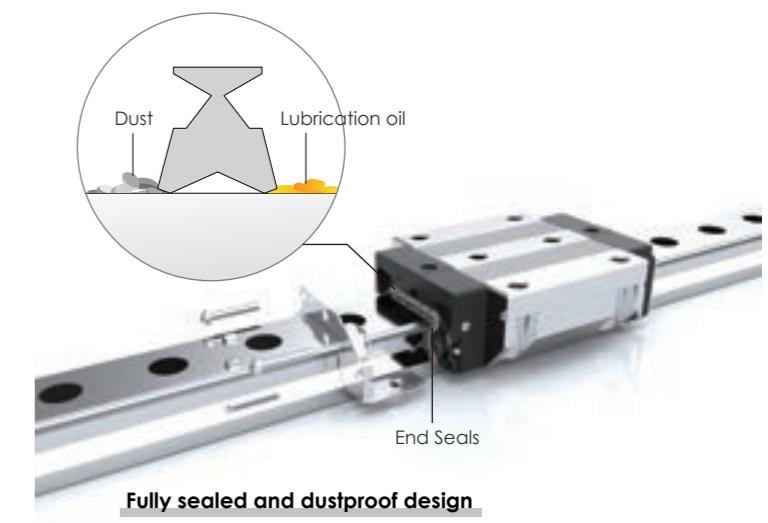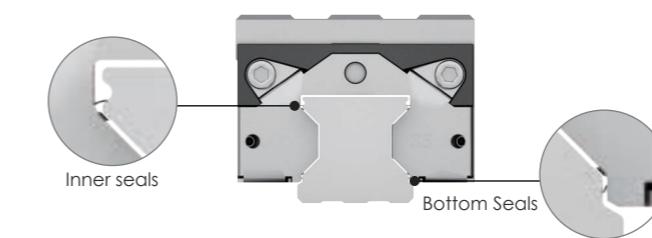


Fully sealed and dustproof design


## Dust-proof design

### Patented metal plastic cap (optional)

The upper part of the cap made of stainless steel can show excellent wear resistance in harsh environments. The inner side of the cap is equipped with a plastic fixed support part, which has the characteristics of easy installation. It can be directly installed on the standard rail. The support part contacts with the screw head screws to prevent by installation from beating too deeply; it can also prevent the cap is lowered due to the pressure of foreign matter above, causing foreign matter to accumulate, when the block moving.

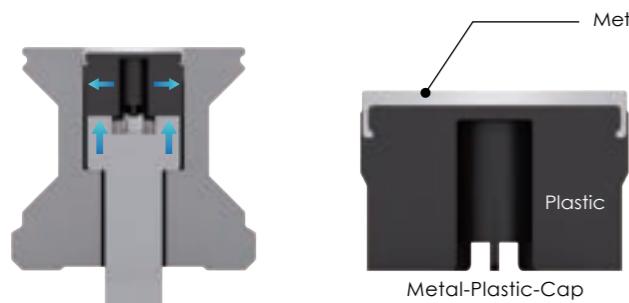


### Dimensions and Specifications

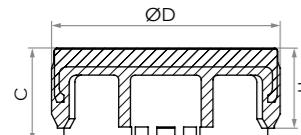

Model Code	Screw	External Diameter D (mm)	Cup Height H (mm)	Block Height C (mm)	Rail
A4	M4	7.7	1.7	2.0	ARR15
A5	M5	9.7	3.4	4.0	ARR20
A6	M6	11.3	2.9	3.5	ARR25
A8-R	M8	14.3	8.0	9.5	ARR35
A12	M12	20.4	5.0	5.6	ARR45
A14	M14	24.4	6.0	6.5	ARR55

### External NBR seal with metal scraper (optional)

For environments where is full of fine dust, such as woodworking machines, glass processing machines, graphite processing machines, and grinders, it can show a high dust resistance. There is stainless steel scraper on the outside of the seal, and the gap between the inner profile and the rail profile is only 0.2~0.3mm, which can prevent large foreign objects from damaging the rubber seal.

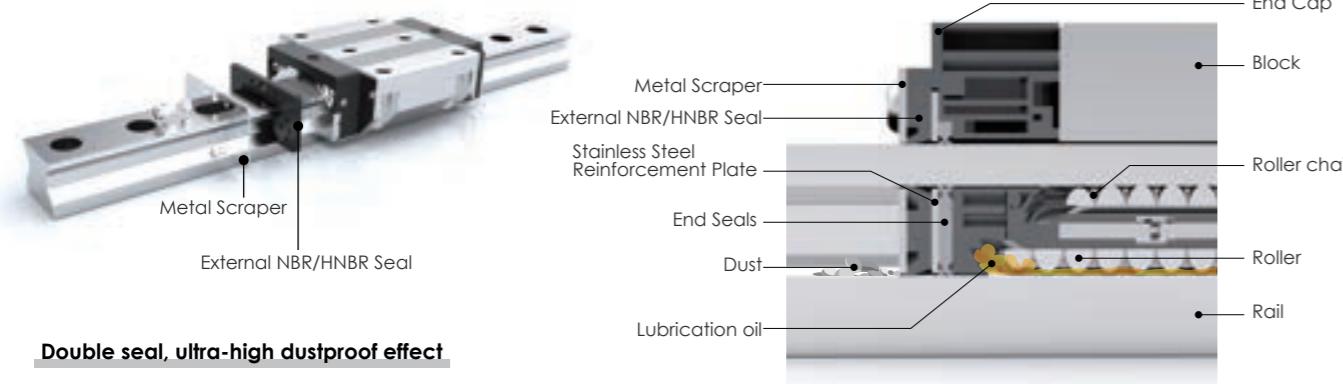


### Double seal, ultra-high dustproof effect

## Dust-proof design

### Patented metal cover strip (optional)

The metal material can prevent foreign matter from invading harsh environments and has a super high dust-proof effect.

- Equipped with cover strip
- High dustproof effectiveness
- Easy installation
- Available in all sizes: 15-55
- Length of the cover strip will be the same as the guide rail
- Fixed device provided on both ends
- Under normal use, the metal cover can be installed and removed repeatedly

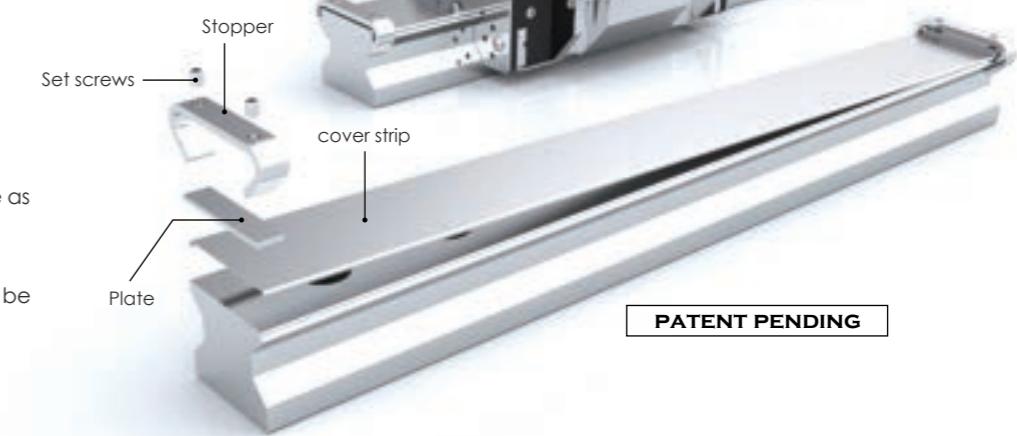


PATENT PENDING

### Metal cover strip installation


#### STEP 1.

Mounting the rail against the reference edge and tighten the screws; measuring the accuracy within the tolerance to ensure a correct mounting process.

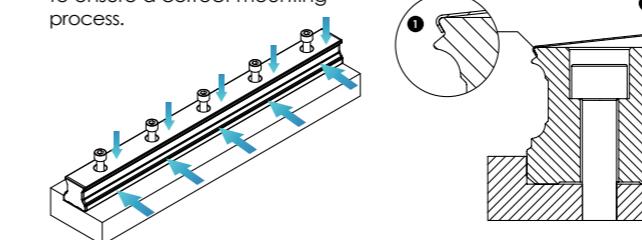


#### STEP 2.

1. Put the cover strip on one side of the rail.
2. Press down the cover strip on the other side to make it fit the rail.

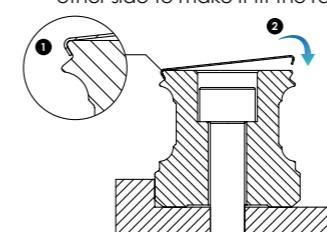


#### STEP 3.

The gap at both ends better to be the same.

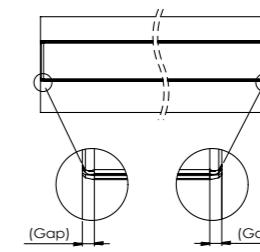

#### STEP 4.


1. Place the press plate on the cover strip.
2. Slide the metal stopper over the plate.
3. Tighten the screws slightly; the press plate is to the cover strip, the rounded surface is attached to the cover strip. Add some lubricating oil. Moving the stopper set forward to the other end by pushing the rigid block, thereafter fix on the rail top surface tightly.
4. Tighten the screws to fix the stopper on one end of the cover strip.

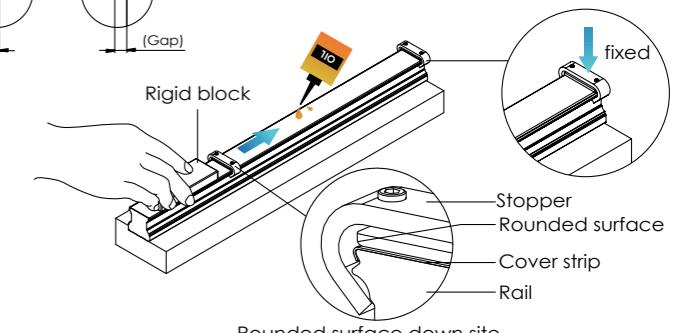

Rounded surface down site


#### STEP 5.

Mounting the block onto the rail. "Attention the reference side on the right side."

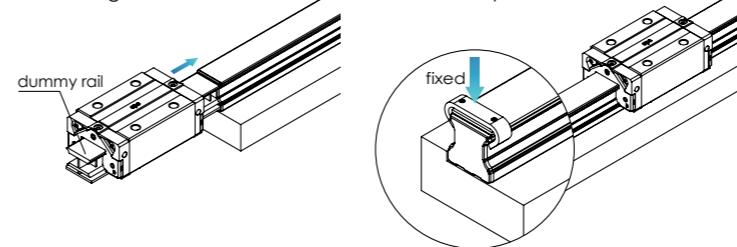

#### STEP 6.



After the block and the rail are assembled, fix the other stopper on the other end of the cover strip.

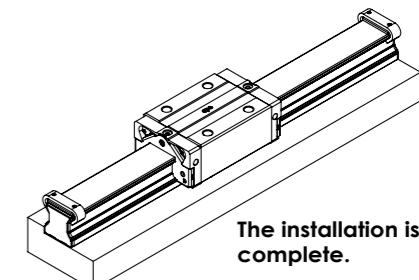

## High rigidity and high load capacity

### Roller guide super high load capacity ( $C_{100}$ Roller VS $C_{100}$ Ball)

The load comparison value of each size of ball and roller block is shown in the chart. No matter in the N standard type, L long type and XL super long type, the load value of the roller is better. As shown in the chart, take size 55 as for example, the L long type of the roller is 36% higher than that of the ball long type, and the XL super long block is higher than the 22% of the L long type of the roller, achieving high torque and high load capacity.

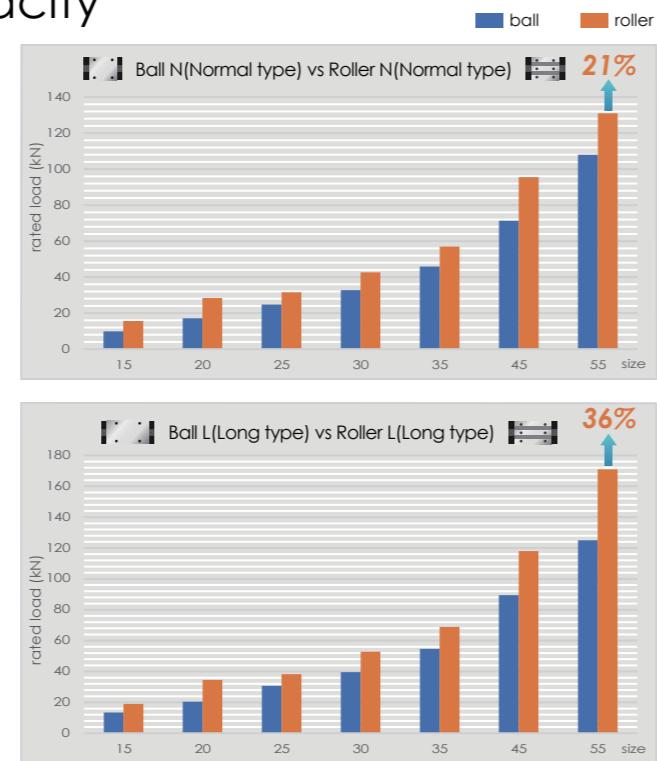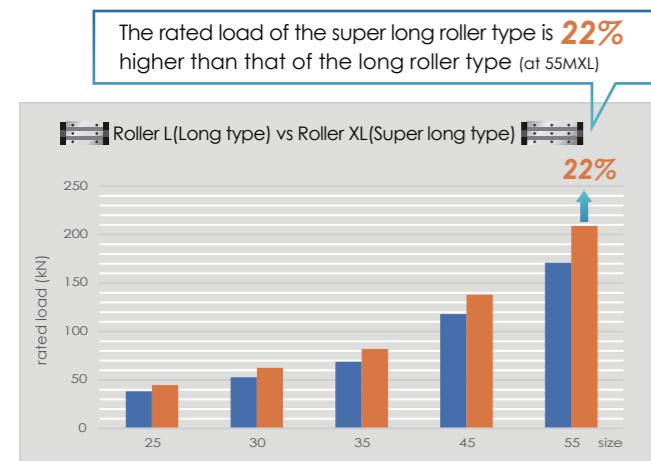


## Roller guide ultra-high rigidity


The relationship between the deformation of the rolling element and the load is not linear. If the greater the deformation, the load will increase non-linearly. As the load increases, the difference in the deformation of a roller and a ball becomes clear (Figure 1).

The selection of preload must take into account the requirements of the installation equipment and devices. Generally speaking, the ratio between the selection of preload and the load value can be referred to as shown in Figures 2 and 3. When the load value exceeds  $F_{pm}$ , the preload of the rolling element in one direction will disappear, resulting in no preload.

If you choose to work with preload, you should pay attention to the force condition under the maximum load to select the preload. However, excessive preload will reduce the service life and reduce the relubrication interval.

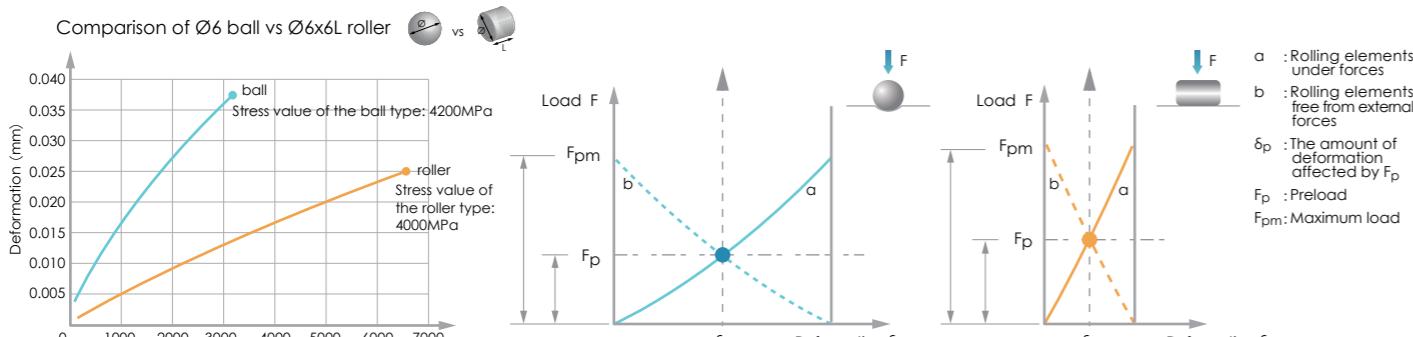


Compared to balls of the same size, the deformation of the rollers is not only less, but also the number of rolling elements that are loaded at the same time is larger than that of the balls, whereby the rollers present excellent high-precision performance. The right figure shows the result of the stiffness test with the load applied. The deformation of the roller is only 40-50% of the ball guide. (when a load of 40 kN).

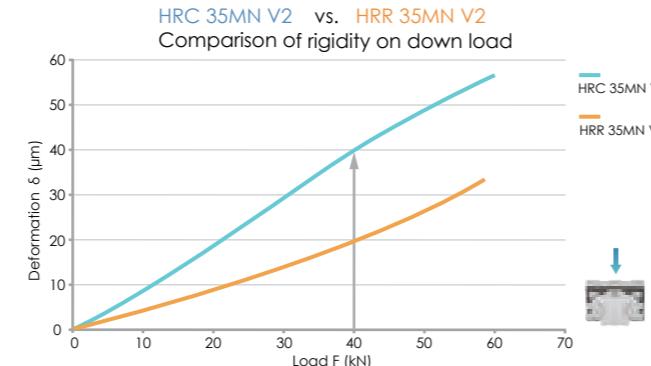

## The service life of the roller guides significantly improved

When the equivalent load  $P$  is the same because the dynamic load rating of the roller type is larger, the service life is longer. Especially under light load conditions, the difference in service life between the roller type and the ball type can be highlighted.

Preload  
— Roller type ARR35MN (Basic rating life in km)  
Preload  
— Ball type ARC35MN (Basic rating life in km)

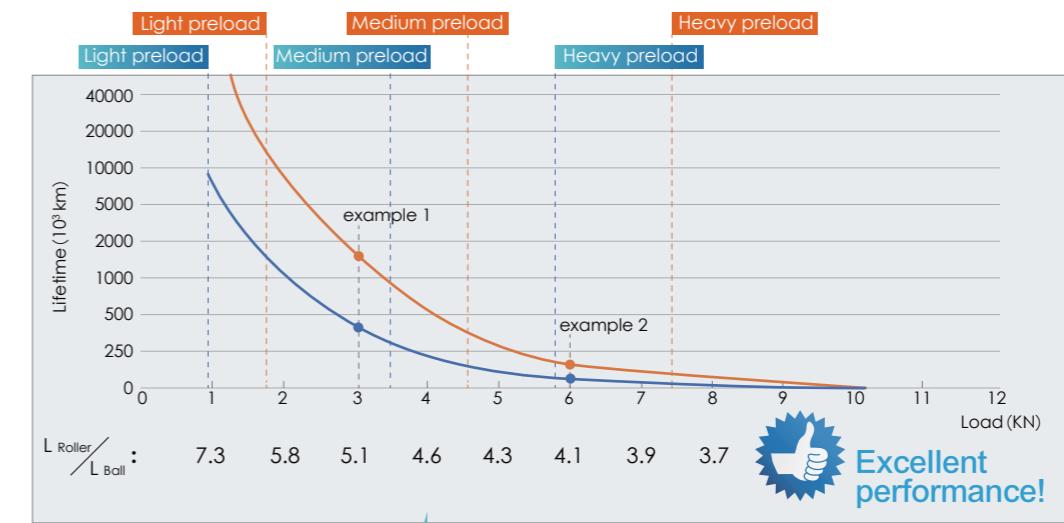

$L_{Roller}$  = Basic rating life of roller linear guide  
 $L_{Ball}$  = Basic rating life of ball linear guide

Roller ARR 35 MN  $C_{Roller} = 57000$  N  $C_0_{Roller} = 154000$  N  
Ball ARC 35 MN  $C_{Ball} = 45900$  N  $C_0_{Ball} = 82900$  N

$C$  = Dynamic load rating N  
 $C_0$  = Static load rating N  
 $L$  = Basic rating life km  
 $P$  = Equivalent load N

Calculation example 1: When  $P$  is 3000N

$$\frac{C_{Roller}}{P} = 19 \quad \frac{C_{Ball}}{P} = 15.3$$

$$L_{Roller} = (19)^{\frac{10}{3}} \cdot 10^2 \quad L_{Ball} = (15.3)^{\frac{10}{3}} \cdot 10^2$$

$$L_{Roller} / L_{Ball} \approx 5.1$$

Calculation example 2: When  $P$  is 6000N

$$\frac{C_{Roller}}{P} = 9.5 \quad \frac{C_{Ball}}{P} = 7.6$$

$$L_{Roller} = (9.5)^{\frac{10}{3}} \cdot 10^2 \quad L_{Ball} = (7.6)^{\frac{10}{3}} \cdot 10^2$$


$$L_{Roller} / L_{Ball} \approx 4.1$$

## Roller guide accuracy grade

The ARR/HRR/LRR linear guides provide 4 different grades of precision : H, P, SP, and UP. Engineers can choose different grades depending on the machine applications.


Size	Accuracy grades ( $\mu\text{m}$ )		UP	SP	P	H
15 ~ 20	Tolerance of dimension height H	H	$\pm 5$	$\pm 10$	$\pm 15$	$\pm 30$
	Variation of height for different runner blocks on the same position of Rail	$\Delta H$	3	5	6	10
	Tolerance of dimension width $W_2$	$W_2$	$\pm 5$	$\pm 7$	$\pm 10$	$\pm 20$
	Variation of width for different runner blocks on the same position of Rail	$\Delta W_2$	3	5	7	15
25 ~ 35	Tolerance of dimension height H	H	$\pm 5$	$\pm 10$	$\pm 20$	$\pm 40$
	Variation of height for different runner blocks on the same position of Rail	$\Delta H$	3	5	7	15
	Tolerance of dimension width $W_2$	$W_2$	$\pm 5$	$\pm 7$	$\pm 10$	$\pm 20$
	Variation of width for different runner blocks on the same position of Rail	$\Delta W_2$	3	5	7	15
45 ~ 55	Tolerance of dimension height H	H	$\pm 5$	$\pm 10$	$\pm 20$	$\pm 40$
	Variation of height for different runner blocks on the same position of Rail	$\Delta H$	3	5	7	15
	Tolerance of dimension width $W_2$	$W_2$	$\pm 5$	$\pm 7$	$\pm 10$	$\pm 20$
	Variation of width for different runner blocks on the same position of Rail	$\Delta W_2$	3	5	7	15

Runner block relative to linear guide, datum plane parallel motion precision

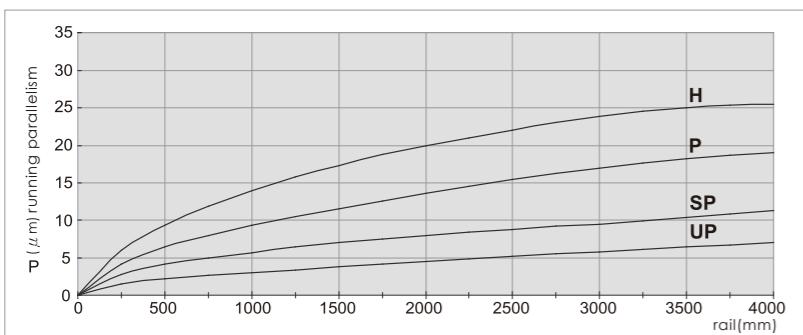

## Roller guide preload and clearance

ARR/HRR/LRR			
Class	Description	Preload Value	Application
V0	Clearance	0.03C	For precision situations, smooth motion
V1	Medium Preload	0.08C	High stiffness, precision, high load situations
V2	Heavy Preload	0.13C	Super high stiffness, precision and load capacity

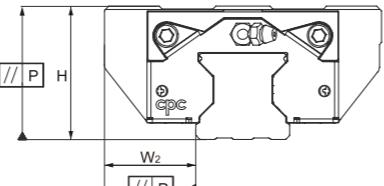


## Major applications Selection of accuracy and preload

The table shows examples of accuracy grade and preload of linear guides for specific purposes. Refer to this table when selecting accuracy grade and preload type for your application.

Type of machine	Application	Accuracy grade				Preload and clearance		
		Precision class H	Precision class P	Precision class SP	Precision class UP	V0 Light Preload	V1 Medium Preload	V2 Heavy Preload
Machine tools	Machining centers	●	●				●	●
	Grinders			●	●		●	●
	Lathes	●	●	●			●	●
	Milling machines	●	●	●			●	●
	Drilling machines	●	●	●			●	●
	Tapping machines	●	●				●	●
	Laser cutting machines	●	●	●			●	●
	Electric discharge machines	●	●	●	●		●	●
Industrial machines and equipment	Press machines	●	●				●	●
	Welding machines	●	●				●	●
	Automatic spray painting machines	●					●	
	Automatic coil winding machines	●					●	●
	Woodworking machines	●		●			●	●
	Glass processing machines	●					●	
	Tire forming machines	●					●	
	Industrial robots	●		●			●	●
Semiconductor facilities	Materials handling equipment	●					●	
	Probers				●		●	●
	Wire bonders	●		●			●	●
	PCB drillers	●		●			●	●
	Dicing machine				●	●	●	●
	Chip mounters	●		●			●	●
Others	Mask Aligner				●	●	●	●
	Measuring / inspection equipment	●		●	●	●	●	
	Three-dimensional measuring equipment	●		●	●	●	●	●
	Medical equipment	●		●	●	●	●	
	Precision XY table	●		●	●	●	●	●
	Injection molding machine	●					●	●
OA equipment	OA equipment	●				●	●	●

## Dimensions Table

Rail (tapped from the bottom)

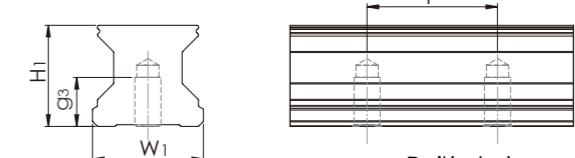

Model Code	W1	H1	P	Mxg3	Lmax	Mass (g/m)
ARRU 15	15	16.4	30	M5x8	4000	1500
ARRU 20	20	21	30	M6x10	4000	2400
ARRU 25	23	23	30	M6x12	4000	3000
ARRU 35	34	31	40	M8x15	4000	5740
ARRU 45	45	38	52.5	M12x19	4000	10000
ARRU 55	53	45	60	M14x24	4000	10000

## Lubrication methods and precautions for roller guides

### Function

When operating the linear guides under sufficient lubrication, a one-micron layer of the oil film at the contact zone separating the loaded rolling elements and the raceway.

### Sufficient lubrication will:

- Reduce the friction
- Minimize wear
- Prevent oxidation
- Dissipate heat and increase operating life.

### Lubrication methods and note on lubrication

1. The block already contains lubricants that can be directly installed on the machine without additional cleaning.
2. If cleaning of the block is required which the oil storage is equipped, please wait until the cleanser and clean naphtha in the oil storage are dry, and then put the block in lubricating oil, so that the oil storage can absorb enough lubricating oil before it will be installed in Machine.
3. Before the first start-up, the carriage and the rail must be protected by adding lubricating grease and contact with liquid or solid contaminants must be avoided.
4. The **cpc** block is provided with lubrication holes at the front and rear ends, as well as left and right and on the top. The grease can be injected into the block through the holes. The amount of grease required for a single block is given in the table below.
5. The block must run back and forth while lubricating.
6. Must consistently provide an oil film on the surface of the rail, which is easily noticeable optically.
7. If dry and discolored, relubrication should be carried out immediately, and the relubrication interval should be determined according to the environment and conditions of use.
8. The user must inform in advance if it is used in a cleanroom environment or requires acid and alkali resistance.
9. If the use of a guide deviates from the horizontal installation, the use of oil lubrication must be carefully checked.
10. The re-lubrication interval must be shortened if the travel stroke is < 2 or > 15 times the length of the steel body of the runner block.
11. If the stroke is less than two times the steel body of the block, the grease must be injected through the lubrication hole from the left and right of the block and then run on a rail that is at least three times the length of the block to distribute the grease evenly in the block. Repeat this step twice.
12. For the central lubrication system, **cpc** recommends the use of liquid grease NLGI 00 or NLGI 000.

### Note on oil lubrication

1. Please indicate "lubricating with oil: O" on order; the block will not be pre-lubricated with grease.
2. If the block already has grease inside and the grease is different from the grease set by the customer or has exceeded the 12-month shelf life, you must clean the block before assembling. Test the lubricants to avoid grease incompatibility. Ensure that the channel is free, and the lubricant can flow to the rolling elements and be lubricated.
3. If using the grease nipple combined with the tubing kit or the set screws for the lubricating oil inlet channel, must wrap it with a tape seal to achieve a leakproof effect.

### Order code Description of the lubricant for the roller guide

Lubrication method	
Model Code	Description
No symbol	Grease is applied to the block. The amount of grease is for installation only. After installation, the customer must be filled with grease.
A	Only use anti-rust oil for primary treatment.
F	Fully lubricated, customers can install and use directly.
N	No grease, only with rust-proof paper packaging.
O	Use lubricant oil.

Note: If the customer orders lubrication storage Z, the lubrication storage will be soaked with lubricant oil (according to the order code) and then lubricated according to the lubrication mentioned

### Lubricant code

Grease	
Model Code	Application
No symbol	Standard grease, lithium soap-based NLGI No.0, high-pressure and high-performance grease, suitable for general purpose.
A	For cleanroom application. Please contact <b>cpc</b> for cleanroom classes.
B	For the food and pharmaceutical processing industry
C	For heavy duty application
D	For short stroke application
E	Vacuum grease, please contact <b>cpc</b> for vacuum requirements.
F	Customer specified grease


  

Oil	
Model Code	Application
No symbol	VG 220 standard oil, suitable for general purpose. It is also used for <b>cpc</b> lubrication storage.
L	VG 68
M	VG 100
N	VG 150
P	For the food and pharmaceutical processing industry
Q	Vacuum grease, please contact <b>cpc</b> for vacuum requirements.
S	Customer specified grease

## Ordering Information

### Length of Rail

Butt-jointing is required when lengths exceed Lmax.  
(For more detailed information, please contact **cpc** for technical support.)

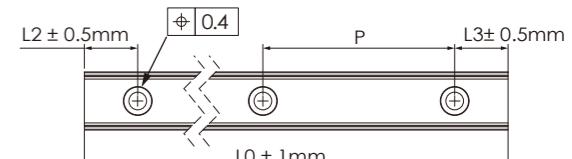

### Model Code

ARR	U	35	M	N	S	2	Z	C	V1	P	-1480L	-20	-20	-O	-	II	/J
Customization code																	
Number of rails on the same moving axis																	
Lubricant: VG 220 (For detailed ordering code, please refer to P65 Grease Order model description)																	
Lubrication: oil (For detailed ordering code, please refer to P65 Grease Ordering Model Description)																	
End hole pitch(mm)																	
Starting hole pitch(mm)																	
Rail length(mm)																	
Accuracy grade: UP, SP, P, H																	
Preload class: V0, V1, V2																	
C: with roller chain																	
Z: with lubrication storage pad																	
Block quantity																	
Seal type: S: standard																	
Block length: N: standard L: long XL: extra long																	
Block width: M: standard F: flanged																	
Block type: 15、20、25、35、45、55																	
U: Rail (tapped from the bottom)																	
Product type: ARR: Low Profile Type HRR: High Profile Type LRR: Extremely Low Profile Type																	

### Customization code(The meaning of suffix characters)

J	: slide rail connection	SG	: installation of side grease holes and set screws
G	: customer designated lubricant	VD	: customized designated preload pressure value
I	: with Inspection report	OA	: block install with grease nipple by <b>cpc</b> (Please contact <b>cpc</b> for direction of grease nipple installation)
S	: special straightness requirements for rail	DE	: reference edges of block and rail on opposite sides
B	: special processing for block	SN	: external NBR seal with metal scraper
BL	: with extension and contraction support layer.	BR	: black chrome coating treatment on the rail
SN	: external NBR seal with metal scraper	CR	: clear chrome coating treatment on the rail
BR	: black chrome coating treatment on the rail	CB	: clear chrome coating treatment on the block
BB	: black chrome coating treatment on the block	CRB	: clear chrome coating treatment on the block and rail
BRB	: black chrome coating treatment on the block and rail	NR	: nickel coating treatment on the rail
SB	: with stainless steel ball bearings	RRB	: raydent coating treatment on the block and rail
NRB	: nickel coating treatment on the block and rail	NB	: nickel coating treatment on the block
Note: For special process or customized requirement, please contact <b>cpc</b> for more information.			
* The end pitch of the rail should not exceed the 1/2 of original pitch, this is to avoid the misfit of the rail to the workbench.			

## Dimensions Table



### ARR MN/ML Series

Model Code	Mounting Dimensions		Rail Dimensions (mm)					Block Dimensions (mm)								Block Dimensions (mm)								Load Capacities (kN)		Static Moment (Nm)			Weight		Model Code				
	H	W2	W1 0 -0.05	H1	P	Dxdxg1	W	L	L1	h2	P1	P1/2	P2	P2/2	P3	Mxg2	M1	T	N1	N2	N3	E	S1	S2	S3	S4	Ciso 100km	C0	Mro	Mpo	Myo	Block (g)	Rail (g/m)		
ARR 15MN	24	9.5	15	16.4	30	7.5x4.5x5.3	34	68.4	46	21.1	26	-	26	13	26	M4x7	-	8	M3x6	M3x4.5	P3	5.3	3.5	6.6	15	14	15.6	43	400	320	320	170	1500	ARR 15MN	
ARR 15ML								83.4	61		26				26												22.5	21.5	19	55.3	530	560	560	230	ARR 15ML
ARR 20MN	30	12	20	21	30	9.5x6x8.5	44	85.6	60	25.6	36	-	32	16	36	M5x8	-	9	M4x8	M4x6.5	P3	6	4.4	8.3	17	16.5	28.4	76.8	900	730	730	350	2400	ARR 20MN	
ARR 20ML								106.6	81		50				50												20.5	20	35.5	102	1250	1300	1300	490	ARR 20ML
ARR 25MN	36	12.5	23	23	30	11x7x9	48	95	67	31	35	-	35	17.5	35	M6x10	-	10	M6x8.5	M6x7.5	P4	12	6.5	11	21.4	20.5	31.6	84	1200	950	950	540	3000	ARR 25MN	
ARR 25ML								114	86		50				50											23.4	22.5	38.3	108	1550	1550	1550	680	ARR 25ML	
ARR 35MN	48	18	34	31	40	14x9x17	70	122	84	42	50	-	50	25	50	M8x13	-	13	M6x12	M6x8	P5	12	10	16.4	25	25	57	154	2742	1946	1946	1200	5740	ARR 35MN	
ARR 35ML								147.5	109.5		72				72									26.7	26.7	68.9	196	3525	3226	3226	1750	ARR 35ML			
ARR 45MN	60	20.5	45	38	52.5	20x14x17	86	156	110	52	60	-	60	30	60	M10x17	-	13	M6x12	M6x8	P6	12	14.6	21.8	39.2	36	95.9	255	6350	4450	4450	2600	10000	ARR 45MN	
ARR 45ML								191	145		80				80									46.7	43.5	118	333	8450	7700	7700	3350	ARR 45ML			
ARR 55MN	70	23.5	53	45	60	24x16x20	100	182.4	130	60	75	-	75	37.5	75	M12x19	-	18	M6x12	M6x9	P6	12	15	22	41.5	39.7	131	338	9750	7100	7100	4500	12700	ARR 55MN	
ARR 55ML								233.4	181		95				95									57	55.2	171	476	13900	13950	13950	5900	ARR 55ML			

1. N2 = Injecting holes

2. N3 = O-ring size for lubrication from above

3. N2, N3 will be sealed before shipment, please open it when first using the product.

4. Please refer to the catalog P11 for the size of the screw hole of the reinforcement sheet.


The above rating load capacities and static moments are calculated according to the ISO14728 standard.

The rating life for basic dynamic load ratings is defined as the total 100km travel distance for 90% of a group of identical linear guides, under the same conditions and free from any material damage caused by rolling fatigue.

### ARR MN/ML...C Series (Roller chain type)

Model Code	Mounting Dimensions		Rail Dimensions (mm)					Block Dimensions (mm)								Block Dimensions (mm)								Load Capacities (kN)		Static Moment (Nm)			Weight		Model Code			
	H	W2	W1 0 -0.05	H1	P	Dxdxg1	W	L	L1	h2	P1	P1/2	P2	P2/2	P3	Mxg2	M1	T	N1	N2	N3	E	S1	S2	S3	S4	Ccage 100km	C0	Mro	Mpo	Myo	Block (g)	Rail (g/m)	
ARR 15MN...C	24	9.5	15	16.4	30	7.5x4.5x5.3	34	68.4	46	21.1	26	-	26	13	26	M4x7	-	8	M3x6	M3x4.5	P3	5.3	3.5	6.6	15	14	19.5	36.8	360	280	280	170	1500	ARR 15MN...C
ARR 15ML...C								83.4	61		26				26									22.5	21.5	23.8	49.1	460	480	480	230	ARR 15ML...C		
ARR 20MN...C	30	12	20	21	30	9.5x6x8.5	44	85.6	60	25.6	36	-	32	16	36	M5x8	-	9	M4x8	M4x6.5	P3	6	4.4	8.3	17	16.5	35.5	65.8	840	670	670	350	2400	ARR 20MN...C
ARR 20ML...C								106.6	81		50				50								20.5	20	45	88	1100	1200	1200	490	ARR 20ML...C			
ARR 25MN...C	36	12.5	23	23	30	11x7x9	48	95	67	31	35	-	35	17.5	35	M6x10	-	10	M6x8.5	M6x7.5	P4	12	6.5	11	21.4	20.5	40	76	1100	850	850	540	3000	ARR 25MN...C
ARR 25ML...C								114	86		50				50								23.4	22.5	48	96	1360	1360	1360	680	ARR 25ML...C			
ARR 35MN...C	48	18	34	31	40	14x9x17	70	122	84	42	50	-	50	25	50	M8x13	-	13	M6x12	M6x8	P5	12	10	16.4	25	25	71.3	133	2350	1710	1710	1200	5740	ARR 35MN...C
ARR 35ML...C								147.5	109.5		72				72								26.7	26.7										

## Dimensions Table

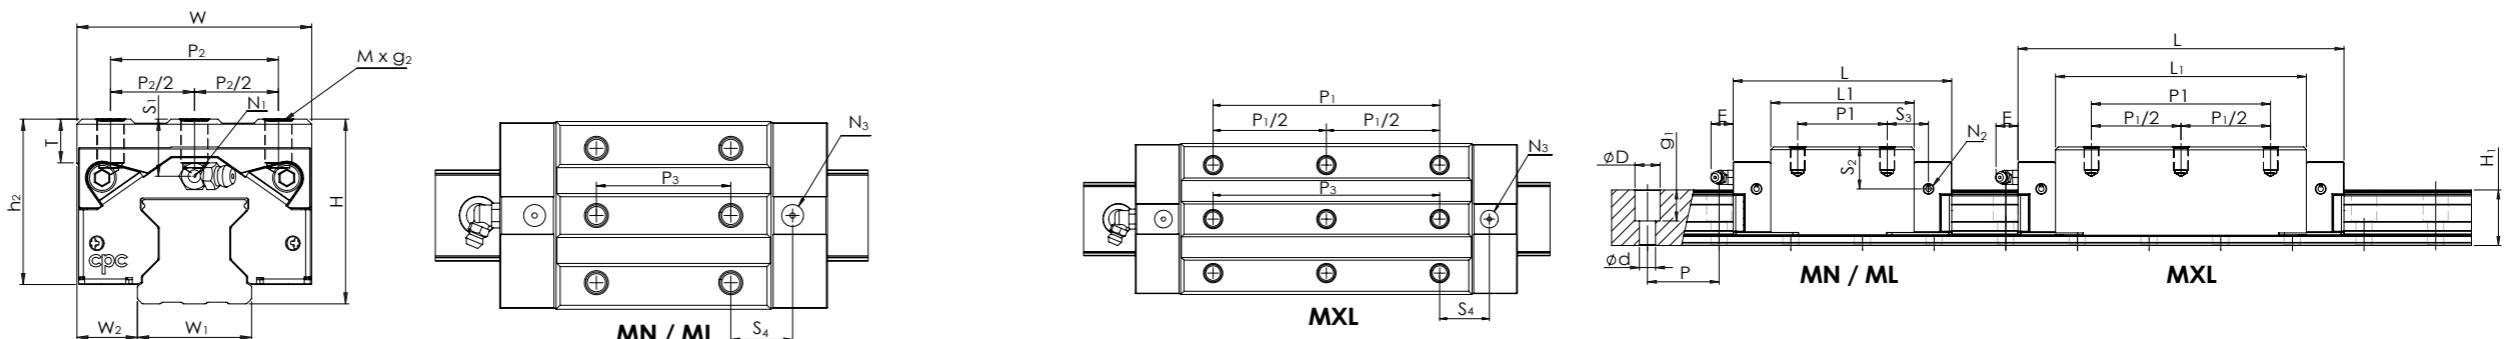

## HRR MN/ML/MXL Series

Model Code	Mounting Dimensions		Rail Dimensions (mm)					Block Dimensions (mm)								Block Dimensions (mm)								Load Capacities (kN)		Static Moment (Nm)			Weight		Model Code			
	H	W <sub>2</sub>	W <sub>1</sub> 0.05	H <sub>1</sub>	P	D <sub>x</sub> D <sub>x</sub> G <sub>1</sub>	W	L	L <sub>1</sub>	h <sub>2</sub>	P <sub>1</sub>	P <sub>1</sub> /2	P <sub>2</sub>	P <sub>2</sub> /2	P <sub>3</sub>	MxG <sub>2</sub>	M <sub>1</sub>	T	N <sub>1</sub>	N <sub>2</sub>	N <sub>3</sub>	E	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>	C <sub>iso</sub> 100km	C <sub>0</sub>	M <sub>r0</sub>	M <sub>p0</sub>	M <sub>y0</sub>	Block (g)	Rail (g/m)	
HRR 15MN	28	9.5	15	16.4	30	7.5x4.5x5.3	34	68.4	46	25.1	26	-	26	13	26	M4x8	-	8	M3x6	M3x4.5	P3	5.3	7.5	10.6	15	14	15.6	43	400	320	320	210	1500	HRR 15MN
HRR 15ML								83.4	61		26	-			22.5		21.5	19	55.3						530	560	560	290	HRR 15ML					
HRR 20MN	34	12	20	21	30	9.5x6x8.5	44	85.6	60	29.6	36	-	36	16	32	M5x8	-	9	M4x8	M4x6.5	P3	6	8.4	12.3	17	16.5	28.4	76.8	900	730	730	420	2400	HRR 20MN
HRR 20ML								106.6	81		50	-			20.5		20	35.5	102						1250	1300	1300	490	HRR 20ML					
HRR 25MN	40	12.5	23	23	30	11x7x9	48	95	67	35	35	-	35	17.5	35	M6x10	- 10	M6x8.5	M6x7.5	P4	12	10.5	15	21.4	20.5	31.6	84	1200	950	950	620	3000	HRR 25MN	
HRR 25ML								114	86		50	-			50		23.4							22.5	38.3	108	1550	1550	1550	800	HRR 25ML			
HRR 25MXL								133.4	105.4		70	35			70		23.1							22.2	44.8	132	1900	2300	2300	950	HRR 25MXL			
HRR 35MN								122	84		50	-			50		25							25	57	154	2742	1946	1946	1720	5740	HRR 35MN		
HRR 35ML	55	18	34	31	40	14x9x17	70	147.5	109.5	49	72	-	50	25	72	M8x16	- 13	M6x12	M6x8	P5	12	17	23.4	26.7	26.7	68.9	196	3525	3226	3226	2100	HRR 35ML		
HRR 35MXL								177.5	139.5		100	50			100		27.7							27.7	82	245	4439	5111	5111	2700	HRR 35MXL			
HRR 45MN								156	110		60	-			60		39.2							36	95.9	255	6350	4450	4450	3400	HRR 45MN			
HRR 45ML	70	20.5	45	38	52.5	20x14x17	86	191	145	62	80	-	60	30	80	M10x20	- 13	M6x12	M6x8	P6	12	24.6	31.8	46.7	43.5	118	333	8450	7700	7700	4300	10000	HRR 45ML	
HRR 45MXL								226	180		120	60			120		44.2							41	138	410	10500	11800	11800	5200	HRR 45MXL			
HRR 55MN	80	23.5	53	45	60	24x16x20	100	182.4	130	70	75	-	75	37.5	95	M12x19	- 18	M6x12	M6x9	P6	12	25	32	41.5	39.7	131	338	9750	7100	7100	5500	12700	HRR 55MN	
HRR 55ML								233.4	181		95	-			95		57							55.2	171	476	13900	13950	13950	7400	HRR 55ML			
HRR 55MXL								290.4	238		150	75			150		58							56.2	209	615	18050	23600	23600	9600	HRR 55MXL			

## 1. N2 = Injecting holes

1. N2 = injecting holes
2. N3 = O-ring size for lubrication from above

3. N2, N3 will be sealed before shipment, please open it when first using the product.

4. Please refer to the catalog P11 for the size of the screw hole of the reinforcement sheet.

The above rating load capacities and static moments are calculated according to the ISO14728 standard. The rating life for basic dynamic load ratings is defined as the total 100km travel distance for 90% of a group of identical linear guides under the same conditions and free from any material damage caused by rolling fatigue.

HRR MN/ML/MXL Series...C Series (Roller chain type)

Model Code	Mounting Dimensions		Rail Dimensions (mm)					Block Dimensions (mm)								Block Dimensions (mm)							Load Capacities (kN)		Static Moment (Nm)			Weight		Model Code				
	H	W <sub>2</sub>	W <sub>1</sub> 0.05	H <sub>1</sub>	P	D <sub>x</sub> d <sub>x</sub> g <sub>1</sub>	W	L	L <sub>1</sub>	h <sub>2</sub>	P <sub>1</sub>	P <sub>1/2</sub>	P <sub>2</sub>	P <sub>2/2</sub>	P <sub>3</sub>	M <sub>x</sub> g <sub>2</sub>	M <sub>1</sub>	T	N <sub>1</sub>	N <sub>2</sub>	N <sub>3</sub>	E	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>	C <sub>cage</sub> 100km	C <sub>0</sub>	M <sub>r0</sub>	M <sub>p0</sub>	M <sub>y0</sub>	Block (g)	Rail (g/m)	
HRR 15MN...C	28	9.5	15	16.4	30	7.5x4.5x5.3	34	68.4	46	25.1	26	-	26	13	26	M4x8	-	8	M3x6	M3x4.5	P3	5.3	7.5	10.6	15	14	19.5	36.8	360	280	280	210	1500	HRR 15MN...C
HRR 15ML...C								83.4	61		26	-			26			22.5		21.5	23.8	49.1	460	480	480	290	HRR 15ML...C							
HRR 20MN...C	34	12	20	21	30	9.5x6x8.5	44	85.6	60	29.6	36	-	32	16	36	M5x8	-	9	M4x8	M4x6.5	P3	6	8.4	12.3	17	16.5	35.5	65.8	840	670	670	420	2400	HRR 20MN...C
HRR 20ML ...C								106.6	81		50	-			50			20.5		20	45	88	1100	1200	1200	490	HRR 20ML ...C							
HRR 25MN...C	40	12.5	23	23	30	11x7x9	48	95	67	35	35	-	35	35	35	M6x10	-	10	M6x8.5	M6x7.5	P4	12	10.5	15	21.4	20.5	40	76	1100	850	850	620	3000	HRR 25MN...C
HRR 25ML...C								114	86		50	-			50			23.4		22.5	48	96	1360	1360	1360	800	HRR 25ML...C							
HRR 25MXL...C	55	18	34	31	40	14x9x17	70	133.4	105.4	70	70	35	70	70	70	M8x16	-	13	M6x12	M6x8	P5	12	17	23.4	23.1	22.2	56	120	1680	2000	2000	950	5740	HRR 25MXL...C
HRR 35MN...C								122	84	49	50	-	50	72	50	M10x20	-	13	M6x12	M6x8	P6	12	24.6	31.8	25	25	71.3	133	2350	1710	1710	1720	5740	HRR 35MN...C
HRR 35ML...C	55	18	34	31	40	14x9x17	70	147.5	109.5		72	-			72			26.7		26.7	86.1	175	3133	2881	2881	2100	HRR 35ML...C							
HRR 35MXL...C								177.5	139.5		100	50			100			27.7		27.7	102.5	224	4047	4695	4695	2700	HRR 35MXL...C							
HRR 45MN...C	70	20.5	45	38	52.5	20x14x17	86	156	110	62	60	-	60	80	60	M10x20	-	13	M6x12	M6x8	P6	12	24.6	31.8	39.2	36	120	222	5750	4050	4050	3400	10000	HRR 45MN...C
HRR 45ML...C								191	145		80	-			80			46.7		43.5	147.5	288	7550	6900	6900	4300	HRR 45ML...C							
HRR 45MXL...C	80	23.5	53	45	60	24x16x20	100	226	180	120	60	120	150	75	M12x19	-	18	M6x12	M6x9	P6	12	25	32	44.2	41	172.5	366	9650	10850	10850	5200	12700	HRR 45MXL...C	
HRR 55MN...C								182.4	130	70	75	-		75	41.5		39.7			164	292	8600	6350	6350	5500	HRR 55MN...C								
HRR 55ML...C	80	23.5	53	45	60	24x16x20	100	233.4	181		95	-		95	57		55.2			214	415	12250	12300	12300	7400	12700	HRR 55ML...C							
HRR 55MXL...C								290.4	238		150	75		150	58		56.2			261	553	16300	21300	21300	9600		HRR 55MXL...C							

## 1. N2 = Injecting holes


1. N2 = Injecting holes
2. N3 = O-ring size for lubrication from above

3. N2, N3 will be sealed before shipment, please open it when first using the product.


4. Please refer to the catalog P11 for the size of the screw hole of the reinforcement sheet.

The measured value is the dynamic load rating value with roller chain  $C_{cage}$ .

The above static load rating and the static moment are calculated according to the ISO 14728 standard.



## Dimensions Table

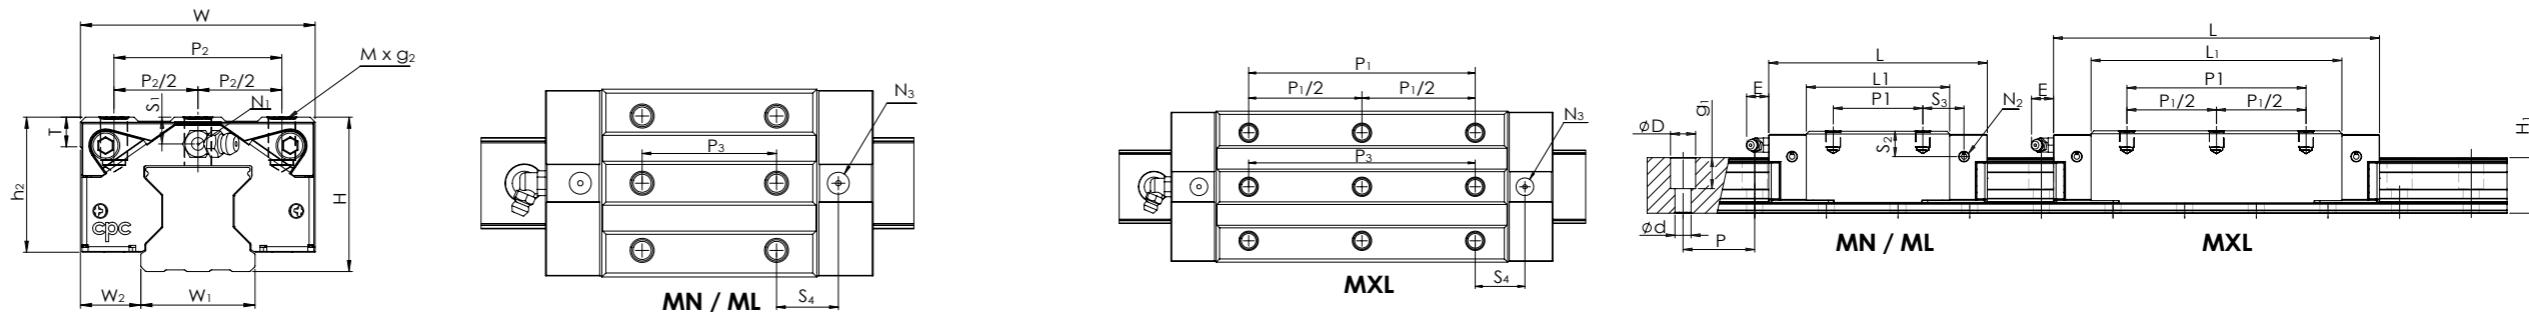

### LRR MN/ML/MXL Series

Model Code	Mounting Dimensions		Rail Dimensions (mm)					Block Dimensions (mm)										Block Dimensions (mm)								Load Capacities (kN)		Static Moment (Nm)			Weight		Model Code		
	H	W <sub>2</sub>	W <sub>1</sub> -0.05	H <sub>1</sub>	P	Dxdxg <sub>1</sub>	W	L	L <sub>1</sub>	h <sub>2</sub>	P <sub>1</sub>	P <sub>1</sub> /2	P <sub>2</sub>	P <sub>2</sub> /2	P <sub>3</sub>	Mxg <sub>2</sub>	M <sub>1</sub>	T	N <sub>1</sub>	N <sub>2</sub>	N <sub>3</sub>	E	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>	C <sub>iso</sub> 100km	C <sub>0</sub>	M <sub>ro</sub>	M <sub>po</sub>	M <sub>yo</sub>	Block (g)	Rail (g/m)		
LRR 35MN								122	84		50	-			50											25	25	57	154	2742	1946	1946	1100		LRR 35MN
LRR 35ML	44	18	34	31	40	14x9x17	70	147.5	109.5	38	72	-	50	25	72	M8x9	-	9	M6x12	M6x8	P5	12	6	12.4	26.7	26.7	68.9	196	3525	3226	3226	1500	5740	LRR 35ML	
LRR 35MXL								177.5	139.5		100	50			100											27.7	27.7	82	245	4439	5111	5111	1900		LRR 35MXL
LRR 45MN								156	110		60	-			60											39.2	36	95.9	255	6350	4450	4450	2100		LRR 45MN
LRR 45ML	52	20.5	45	38	52.5	20x14x17	86	191	145	44	80	-	60	30	80	M10x11	-	10	M6x12	M6x8	P6	12	6.6	13.8	46.7	43.5	118	333	8450	7700	7700	2700	10000	LRR 45ML	
LRR 45MXL								226	180		120	60			120										44.2	41	138	410	10500	11800	11800	3200		LRR 45MXL	
LRR 55MN								182.4	130		75	-			75										41.5	39.7	131	338	9750	7100	7100	3800		LRR 55MN	
LRR 55ML	63	23.5	53	45	60	24x16x20	100	233.4	181	53	95	-	75	37.5	95	M12x16	-	15	M6x12	M6x9	P6	12	8	15	57	55.2	171	476	13900	13950	13950	5100	12700	LRR 55ML	
LRR 55MXL								290.4	238		150	75			150									58	56.2	209	615	18050	23600	23600	6500		LRR 55MXL		

1. N2 = Injecting holes

2. N3 = O-ring size for lubrication from above

3. N2, N3 will be sealed before shipment, please open it when first using the product.


4. Please refer to the catalog P11 for the size of the screw hole of the reinforcement sheet.

The above rating load capacities and static moments are calculated according to the ISO14728 standard. The rating life for basic dynamic load ratings is defined as the total 100km travel distance for 90% of a group of identical linear guides, under the same conditions and free from any material damage caused by rolling fatigue.

### LRR MN/ML/MXL Series...C Series (Roller chain type)

Model Code	Mounting Dimensions		Rail Dimensions (mm)					Block Dimensions (mm)										Block Dimensions (mm)								Load Capacities (kN)		Static Moment (Nm)			Weight		Model Code	
	H	W <sub>2</sub>	W <sub>1</sub> -0.05	H <sub>1</sub>	P	Dxdxg <sub>1</sub>	W	L	L <sub>1</sub>	h <sub>2</sub>	P <sub>1</sub>	P <sub>1</sub> /2	P <sub>2</sub>	P <sub>2</sub> /2	P <sub>3</sub>	Mxg <sub>2</sub>	M <sub>1</sub>	T	N <sub>1</sub>	N <sub>2</sub>	N <sub>3</sub>	E	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	S <sub>4</sub>	C <sub>cage</sub> 100km	C <sub>0</sub>	M <sub>ro</sub>	M <sub>po</sub>	M <sub>yo</sub>	Block (g)	Rail (g/m)	
LRR 35MN...C								122	84		50	-			50									25	25	71.3	133	2350	1710	1710	1100		LRR 35MN...C	
LRR 35ML...C	44	18	34	31	40	14x9x17	70	147.5	109.5	38	72	-	50	25	72	M8x9	-	9	M6x12	M6x8	P5	12	6	12.4	26.7	26.7	86.1	175	3133	2881	2881	1500	5740	LRR 35ML...C
LRR 35MXL...C								177.5	139.5		100	50			100								27.7	27.7	102.5	224	4047	4695	4695	1900		LRR 35MXL...C		
LRR 45MN...C								156	110		60	-			60									39.2	36	120	222	5750	4050	4050	2100		LRR 45MN...C	
LRR 45ML...C	52	20.5	45	38	52.5	20x14x17	86	191	145	44	80	-	60	30	80	M10x11	-	10	M6x12	M6x8	P6	12	6.6	13.8	46.7	43.5	147.5	288	7550	6900	6900	2700	10000	LRR 45ML...C
LRR 45MXL...C								226	180		120	60			120								44.2	41	172.5	366	9650	10850	10850	3200		LRR 45MXL...C		
LRR 55MN...C								182.4	130		75	-			75									41.5	39.7	164	292	8600	6350	6350	3800		LRR 55MN...C	
LRR 55ML...C	63	23.5	53	45	60	24x16x20	100	233.4	181	53	95	-	75	37.5	95	M12x16	-	15	M6x12	M6x9	P6	12	8	15	57	55.2	214	415	12250	12300	12300	5100	12700	LRR 55ML...C
LRR 55MXL...C								290.4	238		150	75			150								58	56.										

## Dimensions Table

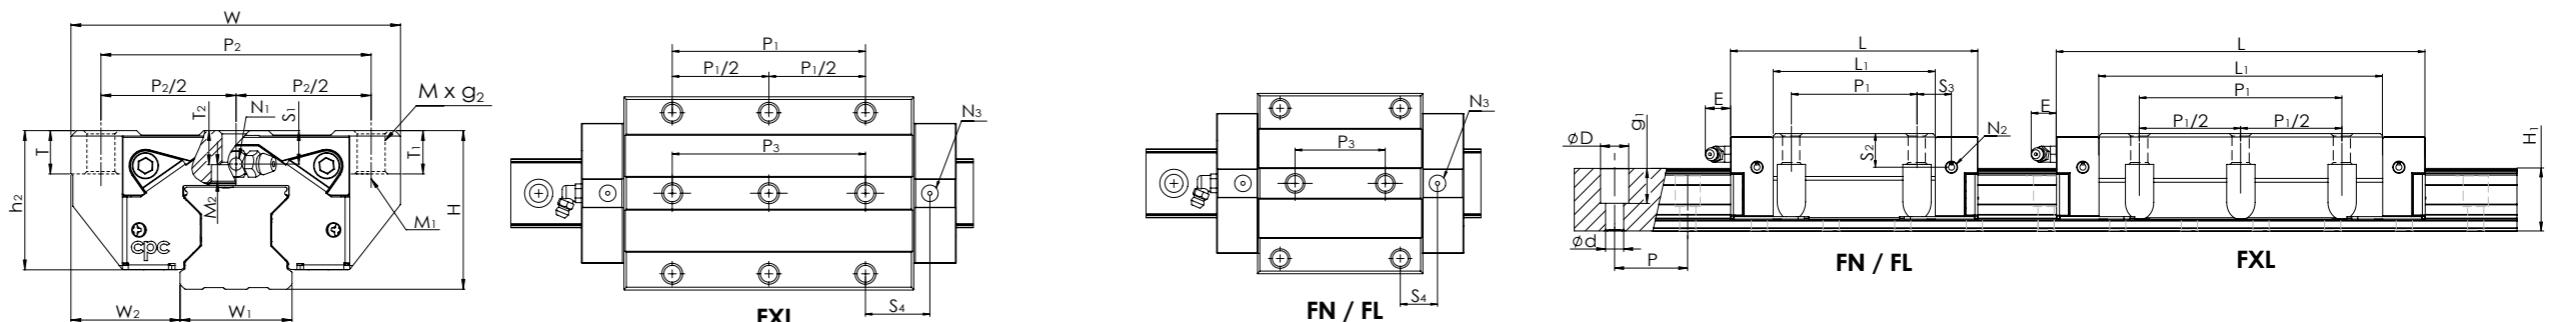

## HRR FN/FL/FXL Series

## 1. N2 = Injecting holes

2. N3 = O-ring size for lubrication from above

3. N2, N3 will be sealed before shipment, please open it

4.  $M\text{g}^2$  M1: Screw size according to ISO 4762-12.9

5. M<sub>2</sub> countersunk screw size according to DIN 7984-8 8

6. Please refer to the catalog P11 for the size of the screw hole

The above rating load capacities and static moments are calculated according to the ISO14728 standard.

The rating life for basic dynamic load ratings is defined as the total 100km travel distance for 90% of a group of 1000 vehicles.

the rolling for the dynamic load ratings, consisting of the total load that was absorbed for 10% of a group of identical linear guides, under the same conditions and free from any material damage caused by rolling fatigue.

HRR EN/ENI/EXI Series...C Series (Roller chain type)

## 1. N2 = Injecting holes

1. N2 = Injecting holes
2. N3 = O-ring size for lubrication from above

3. N2, N3 will be sealed before shipment, please open it


4. M4x2, M1: Screw size according to ISO 4762-12.8

4. Mxg<sup>2</sup>, M1: Screw size according to ISO 4762-12.9  
5. M<sub>2</sub>: countersunk screw size according to DIN 7884 8.8


6. Please refer to the catalog P11 for the size of the screw hole

The measured value is the dynamic load rating value with roller chain C<sub>SSSE</sub>.

The above static load rating and the static moment are calculated according to the ISO 14728 standard.

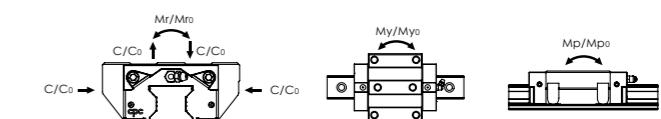

## Dimensions Table

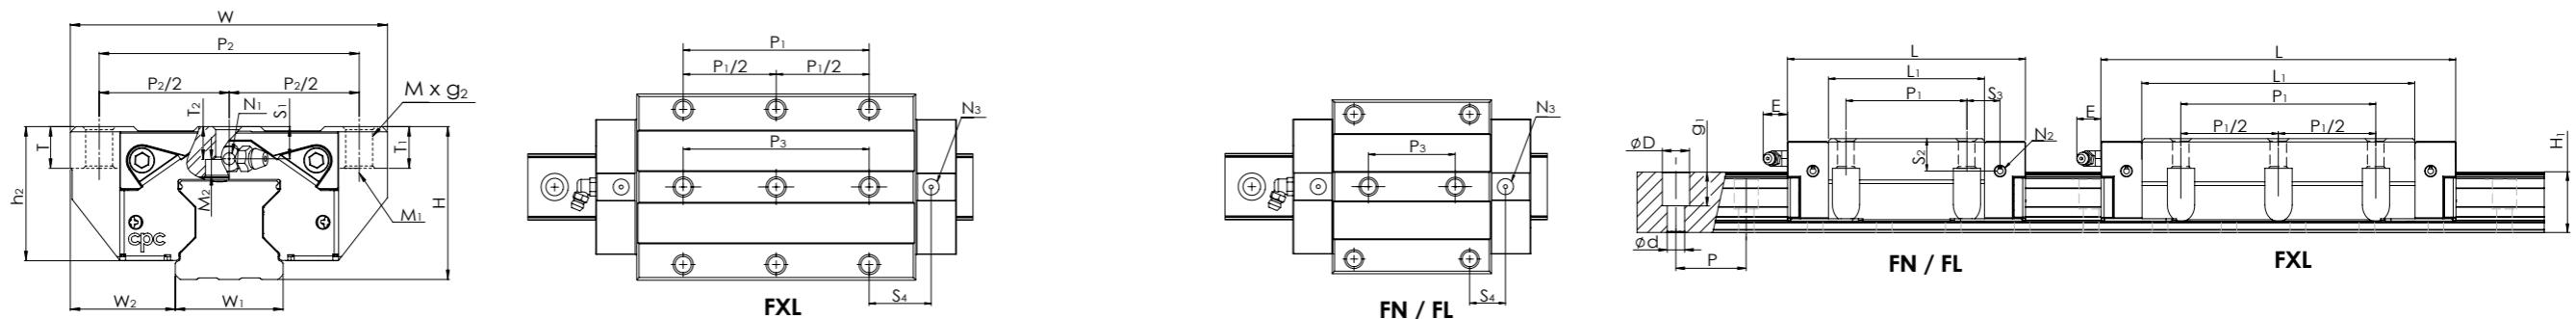

### LRR FN/FL/FXL Series

Model Code	Mounting Dimensions		Rail Dimensions (mm)					Block Dimensions (mm)										Block Dimensions (mm)								Load Capacities (kN)		Static Moment (Nm)			Weight		Model Code				
	H	W2	W1 -0.05	H1	P	Dxdxg1	W	L	L1	h2	P1	P1/2	P2	P2/2	P3	Mxg2	M1	M2	T	T1	T2	N1	N2	N3	E	S1	S2	S3	S4	Ciso 100km	C0	Mro	Mpo	Myo	Block (g)	Rail (g/m)	
LRR 35FN							100	122	84																				19	19	57	154	2742	1946	1946	1550	LRR 35FN
LRR 35FL	44	33	34	31	40	14x9x17	100	147.5	109.5	38	62	-	82	41	52	M10x13	M8	5	9	13	6.7	M6x12	M6x8	P5	12	6	12.4	31.7	31.7	68.9	196	3525	3226	3226	2200	5740	
LRR 35FXL								177.5	139.5			100	50																						LRR 35FXL		
LRR 45FN							120	156	110																				29.2	26	95.9	255	6350	4450	4450	2900	LRR 45FN
LRR 45FL	52	37.5	45	38	52.5	20x14x17	120	191	145		44	80	-	100	50	60	M12x15	M10	6	10	15	7.3	M6x12	M6x8	P6	12	6.6	13.8	46.7	43.5	118	333	8450	7700	7700	3800	10000
LRR 45FXL								226	180				120	60																						LRR 45FXL	
LRR 55FN							140	182.4	130																				31.5	29.7	131	338	9750	7100	7100	5200	LRR 55FN
LRR 55FL	63	43.5	53	45	60	24x16x20	140	233.4	181		53	95	-	116	58	70	M14x18	M12	7	15	18	9.8	M6x12	M6x9	P6	12	8	15	57	55.2	171	476	13900	13950	13950	7100	12700
LRR 55FXL								290.4	238					150	75																					LRR 55FXL	

1. N2 = Injecting holes

2. N3 = O-ring size for lubrication from above

3. N2, N3 will be sealed before shipment, please open it when first using the product.

4. Mxg<sup>2</sup>, M1: Screw size according to ISO 4762-12.9

5. M2 countersunk screw size according to DIN 7984-8.8

6. Please refer to the catalog P11 for the size of the screw hole of the reinforcement sheet.

The above rating load capacities and static moments are calculated according to the ISO14728 standard.

The rating life for basic dynamic load ratings is defined as the total 100km travel distance for 90% of a group of identical linear guides, under the same conditions and free from any material damage caused by rolling fatigue.

### LRR FN/FL/FXL Series...C Series (Roller chain type)

Model Code	Mounting Dimensions		Rail Dimensions (mm)					Block Dimensions (mm)										Block Dimensions (mm)								Load Capacities (kN)		Static Moment (Nm)			Weight		Model Code				
	H	W2	W1 -0.05	H1	P	Dxdxg1	W	L	L1	h2	P1	P1/2	P2	P2/2	P3	Mxg2	M1	M2	T	T1	T2	N1	N2	N3	E	S1	S2	S3	S4	Ccage 100km	C0	Mro	Mpo	Myo	Block (g)	Rail (g/m)	
LRR 35FN...C							100	122	84																				19	19	71.3	133	2350	1710	1710	1550	LRR 35FN...C
LRR 35FL...C	44	33	34	31	40	14x9x17	100	147.5	109.5	38	62	-	82	41	52	M10x13	M8	5	9	13	6.7	M6x12	M6x8	P5	12	6	12.4	31.7	31.7	86.1	175	3133	2881	2881	2200	5740	
LRR 35FXL...C								177.5	139.5			100																								LRR 35FXL...C	
LRR 45FN...C							120	156	110																				29.2	26	120	222	5750	4050	4050	2900	LRR 45FN...C
LRR 45FL...C	52	37.5	45	38	52.5	20x14x17	120	191	145		44	80	-	100	50	60	M12x15	M10	6	10	15	7.3	M6x12	M6x8	P6	12	6.6	13.8	46.7	43.5	147.5	288	7550	6900	6900	3800	10000
LRR 45FXL...C								226	180				120	60																						LRR 45FXL...C	
LRR 55FN...C							140	182.4	130																				31.5	29.7	164	307	8600	6350	6350	5200	LRR 55FN...C
LRR 55FL...C	63	43.5	53	45	60	24x16x20	140	233.4	181		53	95	-	116	58	70	M14x18	M12	7	15	18	9.8	M6x12	M6x9	P6	12	8	15	57	55.2	214	430	12200	12300	12300	7100	12700
LRR 55FXL...C								290.4	238				150	75																						LRR 55FXL...C	

1. N2 = Injecting holes

2. N3 = O-ring size for lubrication from above

3. N2, N3 will be sealed before shipment, please open it when first using the product.

4. Mxg<sup>2</sup>, M1: Screw size according to ISO 4762-12.9

5. M2 countersunk screw size according to DIN 7984-8.8

## Bellows

### Type of bellows



Nylon waterproof bellow (black)  
Features: protection against water, oil and dust

Teflon glass fiber bellow (brown)  
Features: fireproof, acid and alkali resistance



Antistatic fabric bellow (light blue)  
Properties: especially for cleanrooms  
(only antistatic detection, no dust detection)

Neoprene rubber bellow (black)  
Features: oil and water resistance

PVC nylon waterproof bellow (black)  
Features: waterproof, oil-proof, dust-proof

Aluminum-plated fireproof bellow (bright silver)  
Features: non flammable, waterproof, oil-proof

### Fixing with block

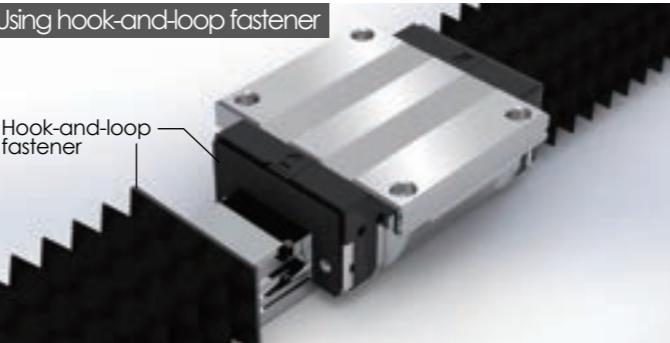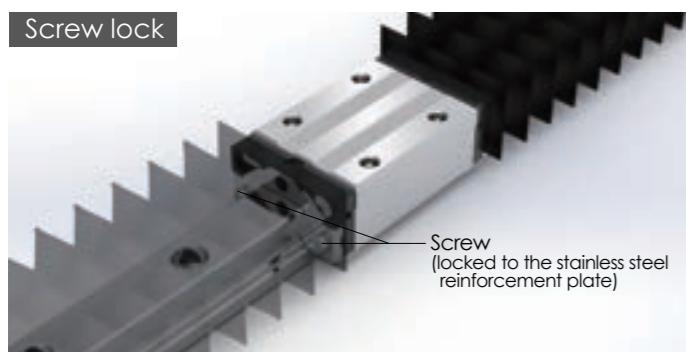

### Calculations

$$L_{min} = \frac{S}{(Q-1)} \quad S: \text{Stroke (mm)}$$

$$L_{max} = L_{min} \cdot Q \quad Q: \text{Calculation factor}$$

EX:

$$S = 200 \quad \text{size: HRC 20} \quad Q = 6 \quad L_{max} = 40 \times 6 = 240$$

$$L_{min} = \frac{200}{(6-1)} = 40 \quad L_{max} / L_{min} = 240 / 40 \quad L_{min} : 10mm$$

### Ordering information

HRC	20	BL-C	240 / 40
			Lmax / Lmin (mm)
		Bellows:	
		BL-A Nylon waterproof bellow	BL-D Neoprene rubber bellow


BL-B Teflon glass fiber bellow      BL-E PVC nylon waterproof bellow

BL-C Antistatic fabric bellow      BL-F Aluminum-plated fireproof bellow

type : Standard Ball type: 15, 20, 25, 30, 35, 45, 55  
Wide Ball type: 21/15, 27/20      Standard Roller type: 35, 45

Product type : Standard Ball type: ARC / HRC / ERC  
Wide Ball type: WRC  
Standard Roller type: ARR / HRR / LRR

Ordering example : HRC20-BL-C-240/40

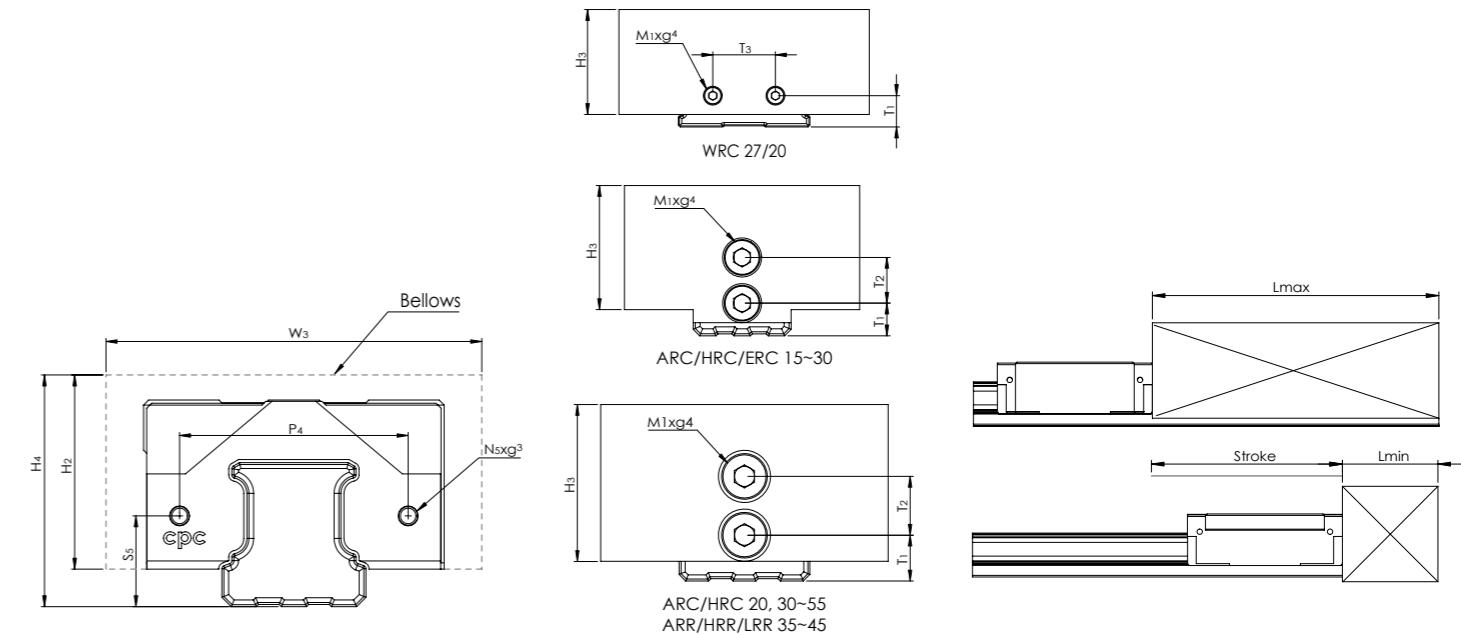

### Dimensions and Specifications

Applicable to: Nylon waterproof bellow, Teflon glass fiber bellow and Antistatic fabric bellow

Type	Size	Main dimensions				Screw holes on the block		fastening screw for block			Screw holes on the rail		fastening screw for rail	calculation factor Q
		W <sub>3</sub>	H <sub>2</sub>	H <sub>3</sub>	H <sub>4</sub>	P <sub>4</sub>	S <sub>5</sub>	N <sub>5</sub>	g <sup>3</sup>	T <sub>1</sub>	T <sub>2</sub>	T <sub>3</sub>	M <sub>1</sub> xg <sup>4</sup>	
ARC/ HRC/ ERC	15	36	19	19	23	25	9.4	M3x0.35	2.3	5	7	-	M3x6	5
	20	44	21	21	27	29	12.5	M3x0.35	2.1	7	9	-	M4x8	6
	25	50	25	25	32	36.5	14.5	M3x0.35	2.8	9	9	-	M4x8	7
	30	60	34	34	41	42.5	17	M4x0.5	3.2	10	10	-	M4x8	8
	35	70	39	39	47	50	19.5	M4x0.5	3.1	13	10	-	M4x8	9
	45	86	49	49	59	65	24	M4x0.5	5.8	15	13	-	M5x10	10
	55	100	56	56	69	73	28.5	M5x0.5	5.6	18	15	-	M5x10	12
WRC	27/20	72	22	22	26	50	11	M3x0.35	2.5	10	-	20	M3x6	5
ARR/ HRR/LRR	35	80	36	36	43	60	18	M4x0.5	4.7	13	10	-	M4x8	12
	45	95	42	42	51	70	22.5	M4x0.5	3.3	15	13	-	M5x10	14


Applicable to: PVC nylon waterproof bellow, Aluminum-plated fireproof bellow, Neoprene rubber bellow  
(please pay attention to the height of the bellow when selecting)

Type	Size	Main dimensions				Screw holes on the block		fastening screw for block			Screw holes on the rail		fastening screw for rail	calculation factor Q
		W <sub>3</sub>	H <sub>2</sub>	H <sub>3</sub>	H <sub>4</sub>	P <sub>4</sub>	S <sub>5</sub>	N <sub>5</sub>	g <sup>3</sup>	T <sub>1</sub>	T <sub>2</sub>	T <sub>3</sub>	M <sub>1</sub> xg <sup>4</sup>	
ARC/ HRC/ ERC	15	55	27	27	31	25	9.4	M3x0.35	2.3	5	7	-	M3x6	5
	20	60	32	32	38	29	12.5	M3x0.35	2.1	7	9	-	M4x8	6
	25	69	37	37	44	36.5	14.5	M3x0.35	2.8	9	9	-	M4x8	7
	30	80	44	44	51	42.5	17	M4x0.5	3.2	10	10	-	M4x8	8
	35	90	50	50	58	50	19.5	M4x0.5	3.1	13	10	-	M4x8	9
	45	105	57	57	67	65	24	M4x0.5	5.8	15	13	-	M5x10	10
	55	125	66	66	79	73	28.5	M5x0.5	5.6	18	15	-	M5x10	12
ARR/ HRR/LRR	35	84	47	47	54	60	18	M4x0.5	4.7	13	10	-	M4x8	8
	45	112	60	60	69	70	22.5	M4x0.5	3.3	15	13	-	M5x10	11

\* If any customized requirements, please contact [cpc](#).

## Nipple Option


### Grease nipple/ Oil piping joint

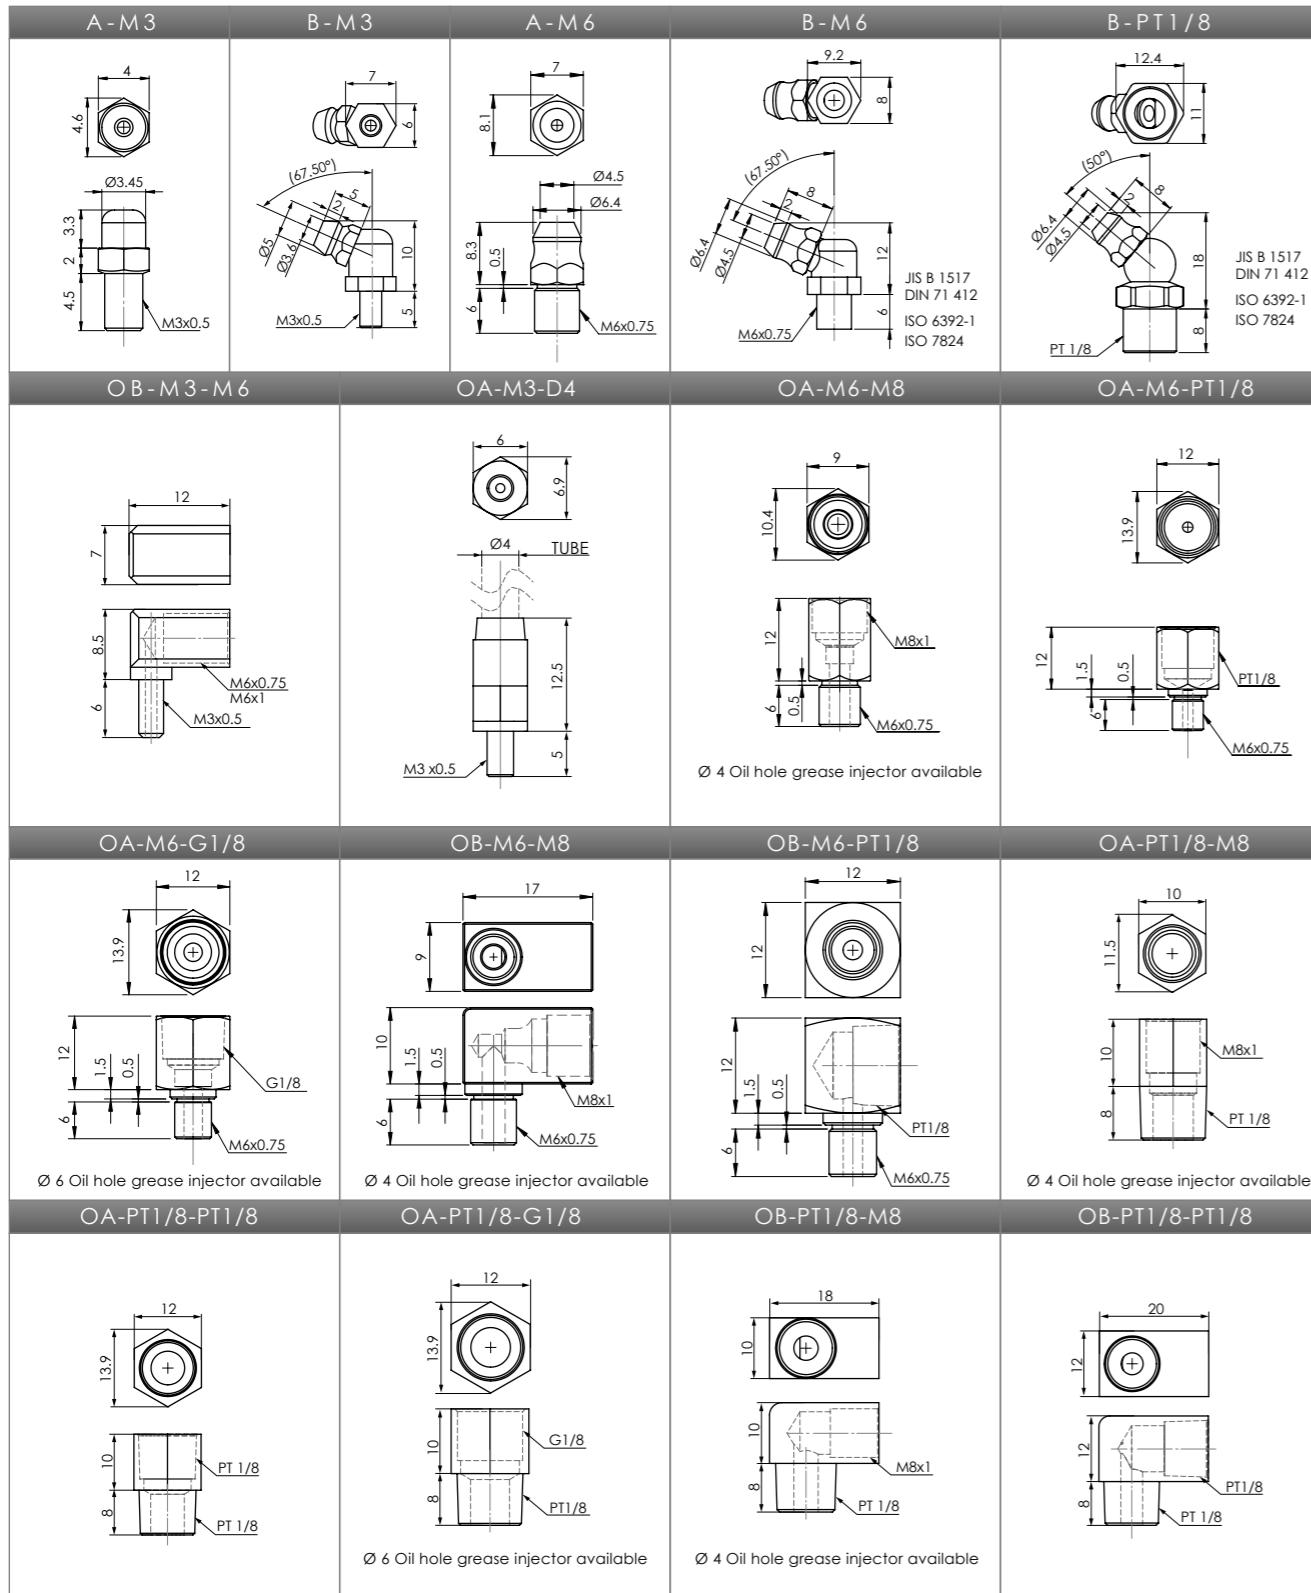

- The L type nipple is for both ball bearing and roller type external seals (SN)

- The XL type nipple is for the roller type external seal (SN)

Note: in case of need for customization or special requirements, please contact **cpc**

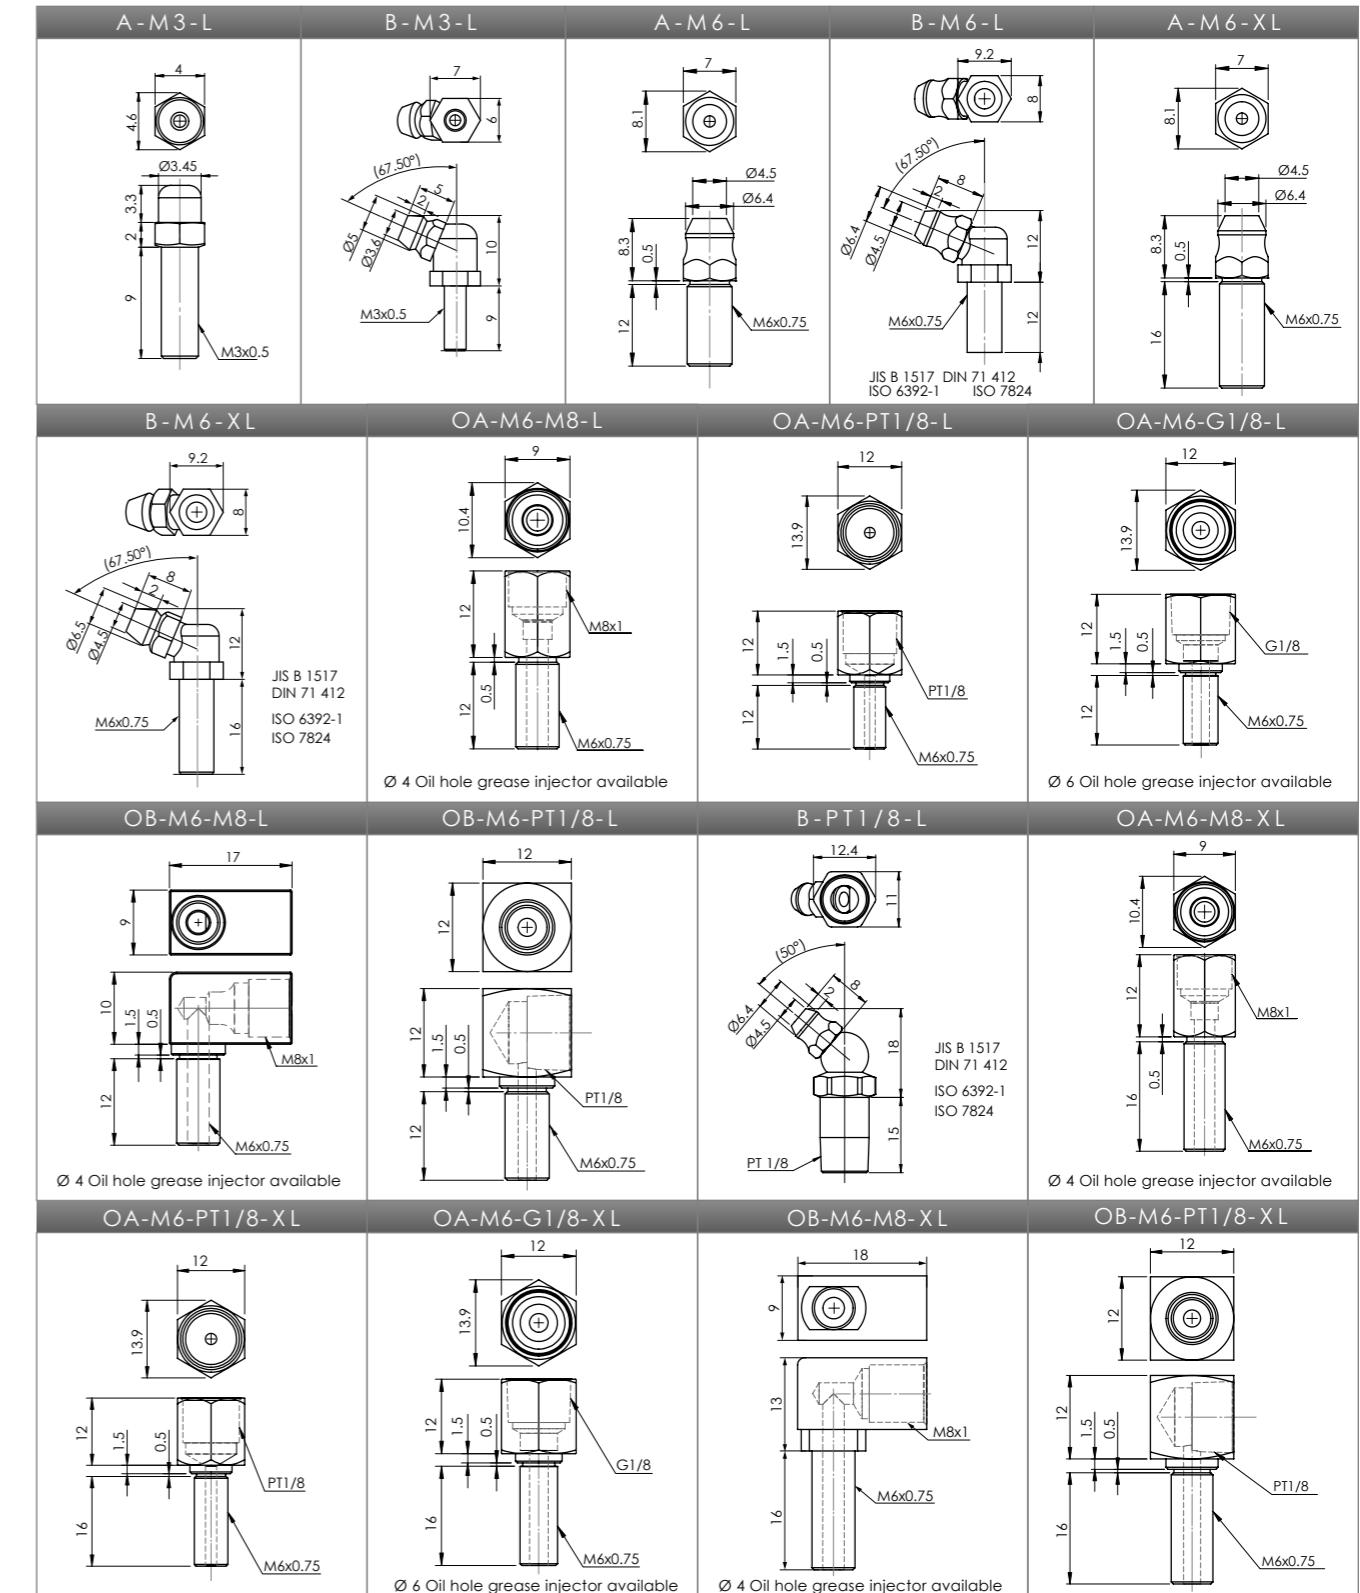

## Lubrication Kit and Grease Gun

The **cpc** Lubrication Unit is a supply nozzle with 3 different sizes of nozzle adaptors. These nozzle adaptors are suitable for differently sized grease nipples on different sized linear blocks.




### Nipple Option

Type	Nipple Size		Nipple Type	
	Section	Side		
Ball	ARC15	HRC15	-	M3 M3 A-M3
	ARC20	HRC20	-	M3 M3 B-M3
	ARC25	HRC25	ERC25	M6 M3 A/B-M6
	ARC30	HRC30	-	M6 M6 A/B-M6
	ARC35	HRC35	-	M6 M6 A/B-M6
	ARC45	HRC45	-	PT1/8 M6 B-PT1/8
	ARC55	HRC55	-	M6 M6 A/B-M6
Roller	ARR15	HRR15	-	M3 M3 A/B-M3
	ARR20	HRR20	-	M4 M4 A/B-M4
	ARR25	HRR25	-	M6 M6 A/B-M6
	ARR35	HRR35	LRR35	M6 M6 A/B-M6
	ARR45	HRR45	LRR45	M6 M6 A/B-M6
	ARR55	HRR55	LRR55	M6 M6 A/B-M6

### GP-PT1/8-01 Lubrication Kit

The Lubrication Kit comes equipped with a supply nozzle (GT-1/8-M5) and three kinds of different nozzle adaptors (GH-M5-MR, GH-M5-06, GH-M5-08).

The supply nozzle can be mounted on the main body of the common manual or pneumatic grease gun with PT1/8 tapped connectors widely available on the market.

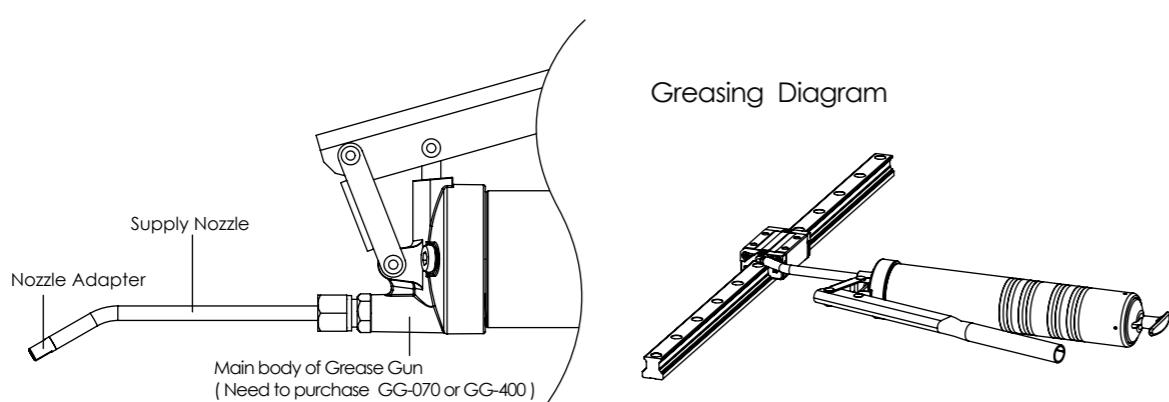

### Supply Nozzle

Type	Dimension
GT-PT1/8-M5	

### Nozzle Adapter

Type	Dimension	Grease Nipple
GH-M5-MR		MR series Miniature linear guide size MR-15M · MR-15W MR-12M · MR-12W
GH-M5-06		A-M3 A-M3-L
GH-M5-08		B-M3 B-M3-L
		A-M6 A-M6-L A-M6-XL
		B-M6 B-M6-L B-M6-XL
		B-PT1/8 B-PT1/8L

### Main body of Grease Gun

Option for the main body of the Grease Gun: GG-070 for 70g volume grease pack and GG-400 for 400g volume grease pack.

Type	Dimension	Feature
GG-070		1. Pressure: 27Mpa 2. Output Volume: 0.5~0.7 c.c/stroke 3. Grease: Suitable for 70g volume grease pack or bulk loading
GG-400		1. Pressure: 62Mpa 2. Output Volume: 1.0~1.2 c.c/stroke 3. Grease: Suitable for 400g volume grease pack or bulk loading

## cpc AR/HR Z Series Lubrication Storage Pad Testing Report

A linear guide is a category of rolling guidance systems. By using unlimited recirculating stainless steel balls that operate between the raceways of the rail and the runner block, the carriage achieves high precision and low friction linear movement. If the linear guides do not have sufficient lubrication, rolling friction will increase, causing wear and shortened linear guide lifespan.

cpc has added and embedded PU lubricant storage pads to prolong the life of the linear guide; the pads directly contact and lubricate the rolling balls. This design supplies sufficient lubrication even in short stroke operations.

cpc's design, due to the embedded pads absorption and retention capabilities, results in a product that features a long operation life and long-term lubrication.

Following are the results of cpc's in-house testing.


### AR15 Lubrication Storage Pad Testing Data

Tested products: AR15 blocks with lubrication storage pads, 8 pieces, and AR15 rails, N accuracy grade, 1500mm Length, 4 pieces

Testing condition	
Rating load capacities(each Block)	1.8KN(C=9KN, C0=17.5KN)
Stroke	0.96m
Max running speed	1m/s
Lubricant	DAPHNE SUPER MULTI 68 (Viscosity64.32 CST, 40OC)
Lubrication period	No lubrication added during testing period

### Testing result


Dried lubricant residue started appearing on rail profile, PU pads, and ball retainer of the tested blocks

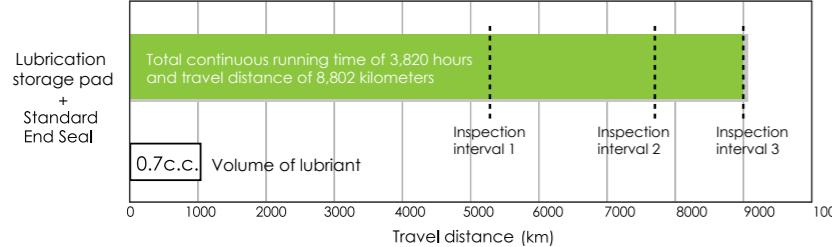

### Testing equipment




### Test results at inspection intervals

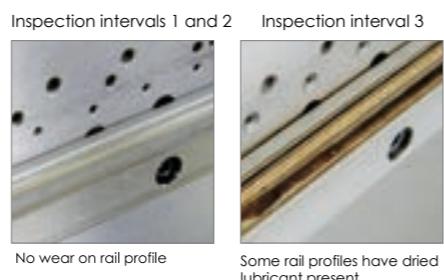

### Inspection intervals 1 and 2: Lubrication Maintained



### Inspection interval 3: Lubricant residue

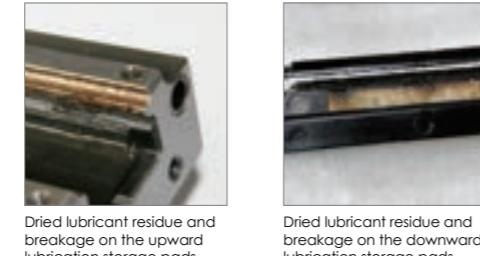

### Plastic parts and end seal in good condition



### Test Summary

Total continuous running time of 3820 hours and travel distance of 8802 kilometers. Out of eight test blocks, dried lubricant residue appeared on 2 blocks and 1 rail. Dried lubricant residue is indicative of a need for relubrication and thus lengthens the operational life of the linear guide.

### Linear Guide Service Life Calculation and Model Selection

Company /	Date (DD/MM/YEAR) /					
Address /	Tel /					
Contact /	Department /	Machine Model /				
Application(Axial) /	Amount required per Machines /	Sample Required Date (DD/MM/YEAR) /				
Application Drawing Provided? <input type="checkbox"/> Yes <input type="checkbox"/> No		Production Date (DD/MM/YEAR) /				
Assembly Specification / Way of Assembling						
<input type="checkbox"/> Horizontal	<input type="checkbox"/> Vertical	<input type="checkbox"/> Wall Hanging	<input type="checkbox"/> Hanging on the Ceiling	<input type="checkbox"/> Inclined 1(Degree: _____)	<input type="checkbox"/> Inclined 2(Degree: _____)	<input type="checkbox"/> Others (Please Draw a Sketch Above)
Rails per Axial	<input type="checkbox"/> I (1)	<input type="checkbox"/> II (2)	<input type="checkbox"/> III (3)	<input type="checkbox"/> Other _____		
Blocks per Rail	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> Other _____		
Distribution of Blocks (mm)	$l_0$ : _____	(Distance Between Blocks on the same rail)	$l_1$ : _____	(Distance Between Adjacent Blocks on different rails)		
Center of Mass of load(mm)	$l_{mx}$ : _____	$l_{my}$ : _____	$l_{mz}$ : _____			
Mass of Load (kg)	(Please include mounting plate weight)					
Driver Position (mm)	$l_{dz}$ : _____	$l_{dy}$ : _____				
External Force Applying Position (mm)	$l_{Fx}$ : _____	$l_{Fy}$ : _____	$l_{Fz}$ : _____			
Axial Component (N)	$F_x$ : _____	$F_y$ : _____	$F_z$ : _____			
One Rail Per Axial		Two Rails Per Axial				
<img alt="Diagram of one rail per axial assembly showing dimensions l_mx, l_my, l_mz, l_dx, l_dy, l_dz, l_0, l_1, l_2, l_3, l_4, l_5, l_6, l_7, l_8, l_9, l_10, l_11, l_12, l_13, l_14, l_15, l_16, l_17, l_18, l_19, l_20, l_21, l_22, l_23, l_24, l_25, l_26, l_27, l_28, l_29, l_30, l_31, l_32, l_33, l_34, l_35, l_36, l_37, l_38, l_39, l_40, l_41, l_42, l_43, l_44, l_45, l_46, l_47, l_48, l_49, l_50, l_51, l_52, l_53, l_54, l_55, l_56, l_57, l_58, l_59, l_60, l_61, l_62, l_63, l_64, l_65, l_66, l_67, l_68, l_69, l_70, l_71, l_72, l_73, l_74, l_75, l_76, l_77, l_78, l_79, l_80, l_81, l_82, l_83, l_84, l_85, l_86, l_87, l_88, l_89, l_90, l_91, l_92, l_93, l_94, l_95, l_96, l_97, l_98, l_99, l_100, l_101, l_102, l_103, l_104, l_105, l_106, l_107, l_108, l_109, l_110, l_111, l_112, l_113, l_114, l_115, l_116, l_117, l_118, l_119, l_120, l_121, l_122, l_123, l_124, l_125, l_126, l_127, l_128, l_129, l_130, l_131, l_132, l_133, l_134, l_135, l_136, l_137, l_138, l_139, l_140, l_141, l_142, l_143, l_144, l_145, l_146, l_147, l_148, l_149, l_150, l_151, l_152, l_153, l_154, l_155, l_156, l_157, l_158, l_159, l_160, l_161, l_162, l_163, l_164, l_165, l_166, l_167, l_168, l_169, l_170, l_171, l_172, l_173, l_174, l_175, l_176, l_177, l_178, l_179, l_180, l_181, l_182, l_183, l_184, l_185, l_186, l_187, l_188, l_189, l_190, l_191, l_192, l_193, l_194, l_195, l_196, l_197, l_198, l_199, l_200, l_201, l_202, l_203, l_204, l_205, l_206, l_207, l_208, l_209, l_210, l_211, l_212, l_213, l_214, l_215, l_216, l_217, l_218, l_219, l_220, l_221, l_222, l_223, l_224, l_225, l_226, l_227, l_228, l_229, l_230, l_231, l_232, l_233, l_234, l_235, l_236, l_237, l_238, l_239, l_240, l_241, l_242, l_243, l_244, l_245, l_246, l_247, l_248, l_249, l_250, l_251, l_252, l_253, l_254, l_255, l_256, l_257, l_258, l_259, l_260, l_261, l_262, l_263, l_264, l_265, l_266, l_267, l_268, l_269, l_270, l_271, l_272, l_273, l_274, l_275, l_276, l_277, l_278, l_279, l_280, l_281, l_282, l_283, l_284, l_285, l_286, l_287, l_288, l_289, l_290, l_291, l_292, l_293, l_294, l_295, l_296, l_297, l_298, l_299, l_300, l_310, l_320, l_330, l_340, l_350, l_360, l_370, l_380, l_390, l_400, l_410, l_420, l_430, l_440, l_450, l_460, l_470, l_480, l_490, l_500, l_510, l_520, l_530, l_540, l_550, l_560, l_570, l_580, l_590, l_600, l_610, l_620, l_630, l_640, l_650, l_660, l_670, l_680, l_690, l_700, l_710, l_720, l_730, l_740, l_750, l_760, l_770, l_780, l_790, l_800, l_810, l_820, l_830, l_840, l_850, l_860, l_870, l_880, l_890, l_900, l_910, l_920, l_930, l_940, l_950, l_960, l_970, l_980, l_990, l_1000, l_1010, l_1020, l_1030, l_1040, l_1050, l_1060, l_1070, l_1080, l_1090, l_1100, l_1110, l_1120, l_1130, l_1140, l_1150, l_1160, l_1170, l_1180, l_1190, l_1200, l_1210, l_1220, l_1230, l_1240, l_1250, l_1260, l_1270, l_1280, l_1290, l_1300, l_1310, l_1320, l_1330, l_1340, l_1350, l_1360, l_1370, l_1380, l_1390, l_1400, l_1410, l_1420, l_1430, l_1440, l_1450, l_1460, l_1470, l_1480, l_1490, l_1500, l_1510, l_1520, l_1530, l_1540, l_1550, l_1560, l_1570, l_1580, l_1590, l_1600, l_1610, l_1620, l_1630, l_1640, l_1650, l_1660, l_1670, l_1680, l_1690, l_1700, l_1710, l_1720, l_1730, l_1740, l_1750, l_1760, l_1770, l_1780, l_1790, l_1800, l_1810, l_1820, l_1830, l_1840, l_1850, l_1860, l_1870, l_1880, l_1890, l_1900, l_1910, l_1920, l_1930, l_1940, l_1950, l_1960, l_1970, l_1980, l_1990, l_2000, l_2010, l_2020, l_2030, l_2040, l_2050, l_2060, l_2070, l_2080, l_2090, l_2100, l_2110, l_2120, l_2130, l_2140, l_2150, l_2160, l_2170, l_2180, l_2190, l_2200, l_2210, l_2220, l_2230, l_2240, l_2250, l_2260, l_2270, l_2280, l_2290, l_2300, l_2310, l_2320, l_2330, l_2340, l_2350, l_2360, l_2370, l_2380, l_2390, l_2400, l_2410, l_2420, l_2430, l_2440, l_2450, l_2460, l_2470, l_2480, l_2490, l_2500, l_2510, l_2520, l_2530, l_2540, l_2550, l_2560, l_2570, l_2580, l_2590, l_2600, l_2610, l_2620, l_2630, l_2640, l_2650, l_2660, l_2670, l_2680, l_2690, l_2700, l_2710, l_2720, l_2730, l_2740, l_2750, l_2760, l_2770, l_2780, l_2790, l_2800, l_2810, l_2820, l_2830, l_2840, l_2850, l_2860, l_2870, l_2880, l_2890, l_2900, l_2910, l_2920, l_2930, l_2940, l_2950, l_2960, l_2970, l_2980, l_2990, l_3000, l_3100, l_3200, l_3300, l_3400, l_3500, l_3600, l_3700, l_3800, l_3900, l_4000, l_4100, l_4200, l_4300, l_4400, l_4500, l_4600, l_4700, l_4800, l_4900, l_5000, l_5100, l_5200, l_5300, l_5400, l_5500, l_5600, l_5700, l_5800, l_5900, l_6000, l_6100, l_6200, l_6300, l_6400, l_6500, l_6600, l_6700, l_6800, l_6900, l_7000, l_7100, l_7200, l_7300, l_7400, l_7500, l_7600, l_7700, l_7800, l_7900, l_8000, l_8100, l_8200, l_8300, l_8400, l_8500, l_8600, l_8700, l_8800, l_8900, l_9000, l_9100, l_9200, l_9300, l_9400, l_9500, l_9600, l_9700, l_9800, l_9900, l_10000, l_10100, l_10200, l_10300, l_10400, l_10500, l_10600, l_10700, l_10800, l_10900, l_11000, l_11100, l_11200, l_11300, l_11400, l_11500, l_11600, l_11700, l_11800, l_11900, l_12000, l_12100, l_12200, l_12300, l_12400, l_12500, l_12600, l_12700, l_12800, l_12900, l_13000, l_13100, l_13200, l_13300, l_13400, l_13500, l_13600, l_13700, l_13800, l_13900, l_14000, l_14100, l_14200, l_14300, l_14400, l_14500, l_14600, l_14700, l_14800, l_14900, l_15000, l_15100, l_15200, l_15300, l_15400, l_15500, l_15600, l_15700, l_15800, l_15900, l_16000, l_16100, l_16200, l_16300, l_16400, l_16500, l_16600, l_16700, l_16800, l_16900, l_17000, l_17100, l_17200, l_17300, l_17400, l_17500, l_17600, l_17700, l_17800, l_17900, l_18000, l_18100, l_18200, l_18300, l_18400, l_18500, l_18600, l_18700, l_18800, l_18900, l_19000, l_19100, l_19200, l_19300, l_19400, l_19500, l_19600, l_19700, l_19800, l_19900, l_20000, l_20100, l_20200, l_20300, l_20400, l_20500, l_20600, l_20700, l_20800, l_20900, l_21000, l_21100, l_212						